

INDEX

Hydraulic Principles & Systems	01
--------------------------------------	----

CYLINDERS

Introduction - Cylinders	02
Aluminum Cylinders - Spring Return	
SSA - Standard, single acting	03
ACHC - Hollow, single acting	04
ADHC - Hollow, double acting	05
Aluminum Cylinders - Load Return	
ALNC - Lock nut, single acting	06
Cylinders - Spring Return, Single Acting	
NSSS - Standard	07
Accessories for NSSS	08
NSHS - Hollow	09
NSCS - Compact, short stroke	10
NSLS - Flat cylinders, low height	11
NSLS - Telescopic cylinders	12
Cylinders - Load Return, Single Acting	
JLLC - Lock Nut	13-14
JLPC - Lock Nut, low height	15
Cylinders - Load Return, Double Acting	
NDAC - Standard	16
NDAH - Hollow	17

PUMPS

Hand Pumps	
P90 - Steel heavy duty, light weight	18
AHP / UHP - Aluminum, 700 ~ 2800 bar	19
HA ~ HF - Steel standard	20
PA / PB - Steel heavy duty	21
Hand Pump Packages	22
HP35 - Steel, 3.5 liter	23
HP80 - Steel, 8.0 liter	24
P350 / P550 / P1000 - Aluminum, special reservoir	25-27
Foot Pumps	
FHA / FHB - Steel standard	28
Air Hydraulic Pumps	
AP921	29
AP1600 / AP3000 / AP8000	30-32
AP13	33
AP18	34
Electric Pumps	
EP13 - 3 liter	35
EP18 - 8 liter	36
EP211 - 11 liter	37
EP320 - 20 liter, 1.48kW	38
EP420 - 20 liter, 2.24kW	39
EP5100 - 100 liter	40

PULLERS

Mechanical Pullers - 2 or 3 way	
PM50 PM52 PM100 PM102 PM150 PM152	41
Manual Easy Pullers - 2/3 way	
PM55 PM85 PM105 PM125 PM155	42
Hydraulic Pullers	
PM400 PM600 PM800 PM1200 PM2000 PM3000	43

Hydraulic Pullers - Package Model	
PM420 PM620 PM820 PM1220	44

Separate Hydraulic Pullers	
PR400 PR600 PR800 PR1200 PR2000 PR3000	45

Separate Hydraulic Pullers - Package Model	
PR420 PR820 PR1220	46

Hydraulic Easy Pullers	
PME400 PME600 PME800 PME1200 PME2000 PME3000	47

Separate Hydraulic Easy Pullers	
PRE400 PRE600 PRE800 PRE1200 PRE2000 PRE3000	48

Push Puller / Three-In-One	
PD12080 PDR12080 MD6023	49-50

Tri-Section Plates	
ET3-160 ET3-210 ET3-340 ET3-495	51

Tri-Section Pullers	
P3412 P3612 P3812 P31212	52

Universal Bearing Attachments & Cross Bearing Pullers	
PM410 - PM1210, P412 - P1212, YC9005 - YC9035A	53

50 Ton Easy Pullers	
PME50T PME50TE PRE50T	54-55

100 & 150 Ton Easy Puller	
PME100T PME100TE PME150T PME150TE	56-58

100 Ton Push Pullers	
BRBP100T BRBP100TE MDTU100TE	59-60

SPREADERS

Hydraulic Spreaders	
SR07 TL07 SR15	61

Hydraulic Flange Spreaders	
PFS10T PFS10TI	62

OTHER HYDRAULIC TOOLS

Nut Splitters	
HNS series, Capacity 10 - 50 Ton	63

Toe Jacks	
TOE series, Capacity 2.5 - 50 Ton	64

Low-Height Jacks	
CJ100 CJ200	65

Bottle Jacks & Air/Hydraulic Jacks	
AJ, BJ & AJB series	66

Portable Power Kits	
PA904A PA910A	67


Shop Presses	
Capacity 10 - 100 Ton	68-70

ACCESSORIES


High pressure - 700 bar	
Manifolds, Fittings, Valves, Connectors, Adaptors, Hoses, Hyd. Oil	71-77

Extra High Pressure - 2000 & 3000 bar	
Couplers, Hoses, Gauge	78-81

Safety Tips	
.....	82-83

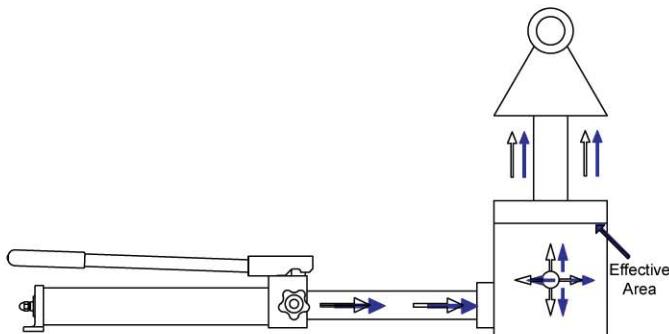


The basic hydraulic system consists of a single acting cylinder. The pump can be powered by an electric motor, air power and also mechanic driven by hand or foot pumps.

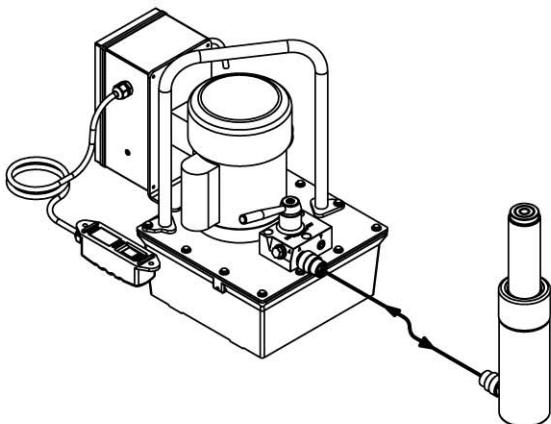

Flow: is created by pump.

Pressure: is created by resistance to flow. This resistance is usually the result of a load.

Force: The amount of force a hydraulic cylinder can be generated is equal to hydraulic pressure times the effective area of the cylinder. (Effective area is the surface of the piston face in cm².) For multiple cylinder systems, multiply the effective area times the number of cylinders times pressure to determine system force.

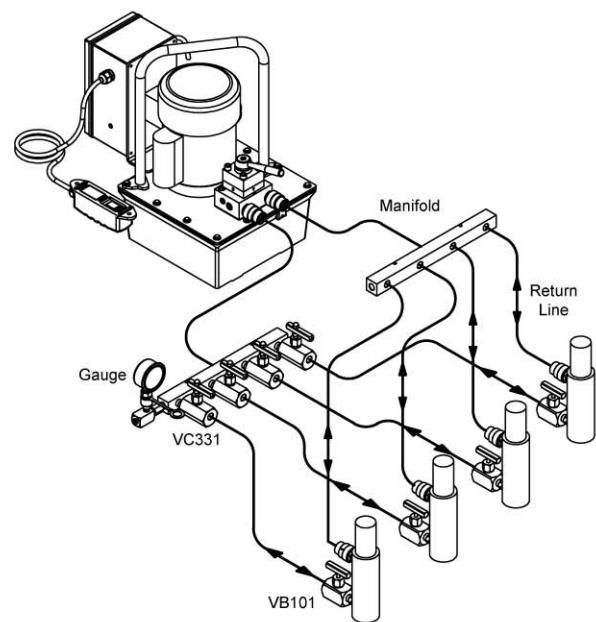

Many different system arrangements can be achieved by using a remote mounted directional valve. Remote valves are ideal when system control is desired away from the pump. Hydraulic connections are quick and convenient when you use inline manifolds to control up to 4 double-acting cylinders.

■ Formula for Calculation of Output Force:

$$\frac{\text{bar} \times \text{Cylinder Effective Area} \times \text{No. of Cylinders}}{1000 \text{ kgs}} = \text{Metric Tons}$$

Speed: When using a "power pump" the speed at which your cylinder will lift is determined by dividing the pump's flow by the cylinder's effective area.

■ Formula for Calculation of Lifting Speed

$$\frac{\text{Pump Flow per Minute}}{\text{Cylinder Effective Area} \times \text{No. of Cylinders}} = \text{Piston Travel (mm / min)}$$

1 Gallon = 231 cu. in. ; 1 Ounce = 1.8 cu.in. ;
1 " KIP " = 1,000 lbs

■ Metric Conversion Chart

1 U.S. Gallon = 3.785 Liters
= 3.785 cu./cm

1kPa	= 6.9 psi
1 inch	= 2.54 cm
	= 25.4 mm

1 Cubic Inch = 16.39 cu./cm
1 Bar = 14.7 psi

1 Meter	= 39.37 in.
1 Horsepower	= 745.7 Watts
Centigrade	= 5/9 (F-32)
Fahrenheit	= 9/5 (C+32)

1 Metric Ton = 2,205 lbs
= 1,000 kgs

1 Ton (short) = 2,000 lbs
= 907.18 kgs

INTRODUCTION - CYLINDERS

POWERRAM
HYDRAULIC TOOLS



FEATURES

1. Wide Variety

Powerram offers the wide selection of cylinder design, capacity and stroke to match your daily requirements.

2. Built for Rugged Industrial/Construction Use

All Powerram cylinders meet worldwide Safety Standards. Stop rings, plated pistons and heavy duty construction provide trouble free operation and long life.

3. Spring Return

Heavy duty, wound steel plated springs provide fast and complete retraction after cycle, and retain their tension longer. Long lasting springs contribute substantially to cylinder life.

4. Versatile Fixturing

Threaded collars and internal plunger threads withstand full loading for maximum flexibility in fixturing.

5. Piston Blow-Out Protection

All Powerram cylinders incorporate a positive piston stop to limit piston travel at the end of the stroke, allowing the cylinder to be operated at full stroke. Piston stops add strength and safety to your Powerram cylinder.

6. Protection from Contamination

Rod wiper clean the rod surface during retraction, protecting the inner cylinder assembly from dirt, moisture and other contaminants that may reduce the strength of the piston stroke.

7. Protection from Outside

Most POWERRAM cylinders have Black Nitriding Finish which provide sustainable protection against moisture and other contaminant.

All aluminum cylinders have hard anodized finish.

8. POWERRAM cylinders fully comply to ANSI/ASME B30.1.

SUMMARY OF CYLINDERS

Series	Description	Type	Capacity (Tons)	Stroke (mm)	Page
NSSS	Standard, Spring Return	Single Acting	4.5 - 100	25.4 - 406	07
NSHS / NRHS	Hollow, Spring Return	Single Acting	10 - 100	8 - 160	09
NSCS	Compact, Spring Return	Single Acting	10 - 100	38 - 62	10
NSLS	Flat & Telescopic, Spring Return	Single Acting	5 - 150	6 - 25	11 - 12
JLLC	Lock Nut, Load Return	Single Acting	50 - 1000	50 - 300	13 - 14
JLPC	Lock Nut, Low height, Load Return	Single Acting	60 - 250	45 - 50	15
SSA	Aluminum, Standard, Spring Return	Single Acting	20 - 100	50 - 250	03
ACHC	Aluminum, Hollow, Spring Return	Single Acting	20 - 60	50 - 150	04
ALNC	Aluminum, Lock Nut, Spring Return	Single Acting	20 - 100	50 - 250	06
ADHC	Aluminum, Hollow	Double Acting	30 - 60	50 - 250	05
NDAC	Standard	Double Acting	10 - 100	150 - 470	16
NDAH	Hollow	Double Acting	30 - 100	76 - 257	17



MODEL:SSA-SERIES

Capacity: 20 - 100 Ton

Stroke: 50 - 250 mm

Spring Return, Single Acting

Max. Working Pressure: 700 bar / 10,000 psi



FEATURES

- Half weight of the steel cylinders.
- Heavy duty spring for fast & full retraction.
- Large saddle surface for side load protection.
- Carrying handles are equipped for all models.
- Hard-Anodized coating reduces wear & corrosion.
- Rod wiper protects inner rod from dirt.
- Stop rings for piston blow-out protection.

Base Plate Mounting Holes Dimensions(mm)

Model No./ Capacity (ton)	Bolt Circle U (mm)	Thread V (mm)	Thread Depth Z (mm)
SSA-20	70	M6x1.0	20
SSA-30	80	M6x1.0	10
SSA-50	110	M6x1.0	10
SSA-100	160	M6x1.0	10

SPECIFICATIONS

Model No.	Capacity (tons)	Stroke (mm)	Cylinder Effective Area (cm²)	Oil Capacity (cm³)	Collapsed Height A (mm)	Extended Height B (mm)	Outside Diameter D (mm)	Cylinder Bore Diam E(mm)	Plunger Diameter F (mm)	Base to Advance Port H(mm)	Saddle Diameter J (mm)	Saddle Protrusion from Plunger K(mm)	Weight (kgs)
SSA202	20	50	33.2	166	168	218	92	62	55	25	40	3	4.3
SSA204		100	33.2	332	218	318	92	62	55	25	40	3	5.0
SSA206		150	33.2	498	268	418	92	62	55	25	40	3	5.7
SSA208		200	33.2	664	318	518	92	62	55	25	40	3	6.5
SSA302	30	50	44.2	221	175	225	110	75	60	25	40	3	6.0
SSA304		100	44.2	442	225	325	110	75	60	25	40	3	6.9
SSA306		150	44.2	663	275	425	110	75	60	25	40	3	7.9
SSA308		200	44.2	884	325	525	110	75	60	25	40	3	8.8
SSA502	50	50	70.9	354.5	171	221	135	95	80	30	70	6	7.7
SSA504		100	70.9	709	221	321	135	95	80	30	70	6	9.1
SSA506		150	70.9	1063.5	271	421	135	95	80	30	70	6	11.7
SSA508		200	70.9	1418	321	521	135	95	80	30	70	6	13.5
SSA5010	100	250	70.9	1772.5	371	621	135	95	80	30	70	6	16.4
SSA1002		50	143	715	185	235	200	135	105	45	70	6	17.2
SSA1004		100	143	1430	235	335	200	135	105	45	70	6	21.0
SSA1006		150	143	2145	285	435	200	135	105	45	70	6	25.1
SSA1008		200	143	2860	335	535	200	135	105	45	70	6	28.5
SSA10010		250	143	3575	388	638	200	135	105	45	70	6	30.7



MODEL: ACHC-SERIES

Capacity: 20 - 60 Tons

Stroke: 50 - 150 mm

Spring Return, Hollow Type


Max. Working Pressure: 700 bar / 10,000 psi

FEATURES

- Half weight of the steel cylinders.
- Heavy duty spring for fast & full retraction.
- Chrome plated center hole for extra protection.
- Carrying handles are equipped with all models.
- Hard-Anodized coating reduces wear & corrosion.
- Stop rings for piston blow-out protection.
- Rod wiper protects inner rod from dirt.

Base Plate Mounting Holes Dimensions(mm)

Model No./ Capacity (ton)	Bolt Circle U (mm)	Thread V (mm)	Thread Depth Z (mm)
ACHC-20	80	M6×1.0	10
ACHC-30	110	M6×1.0	10
ACHC-60	160	M6×1.0	10

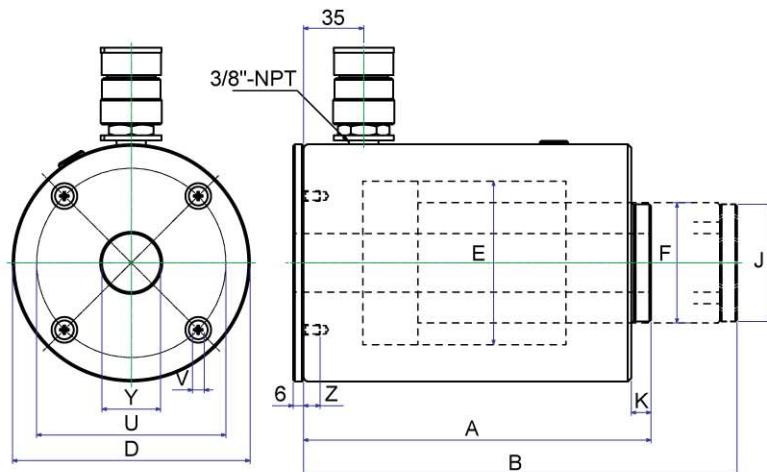

SPECIFICATIONS

Model No.	Cylinder Capacity (tons)	Stroke (mm)	Cylinder Effective Area (cm²)	Oil Capacity (cm³)	Collapsed Height A (mm)	Extended Height B (mm)	Outside Diameter D (mm)	Cylinder Bore Diam E(mm)	Plunger Diameter F (mm)	Base to Advance Port H(mm)	Saddle Diameter J (mm)	Saddle Protrusion from Plunger K(mm)	Center Hole Dia. Y (mm)	Weight (kg)
ACHC202		50		170	175	225	110	75	55	30	54	8	27	4.3
ACHC204	20	100	34	340	245	345	110	75	55	30	54	8	27	6.5
ACHC206		150		510	315	465	110	75	55	30	54	8	27	8.0
ACHC302		50		275	202	252	138	95	70	35	68	11.5	34	8.4
ACHC304	30	100	55	550	264.5	364.5	138	95	70	35	68	11.5	34	11.8
ACHC306		150		825	327	477	138	95	70	35	68	11.5	34	12.8
ACHC602		50		448	250	300	200	125	100	50	89	14	54	23.0
ACHC604	60	100	89.5	895	300	400	200	125	100	50	89	14	54	26.3
ACHC606		150		1342	350	500	200	125	100	50	89	14	54	27.0

ALUMINUM CYLINDERS

POWERRAM
HYDRAULIC TOOLS



MODEL:ADHC-SERIES

Capacity: 30 & 60 Tons

Stroke: 50 - 250 mm

Hollow, Double Acting

Max. Working Pressure: 700 bar / 10,000 psi




FEATURES

- Half weight of the steel cylinders.
- Steel piston regarding protection against load damage.
- Chrome plated center sleeve for extra protection.
- Carrying handles are equipped with all models.
- Hard-Anodized coating reduces wear & corrosion.
- Stop rings for piston blow-out protection.
- Rod wiper protects inner rod from dirt.

Base Plate Mounting Holes Dimensions(mm)

Model No./ Capacity (ton)	Bolt Circle U (mm)	Thread V (mm)	Thread Depth Z (mm)
ADHC-30	110	M6×1.0	10
ADHC-60	160	M6×1.0	10

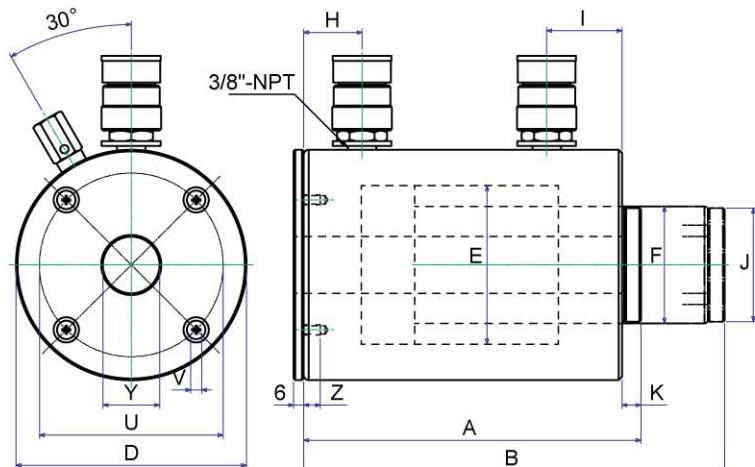

SPECIFICATIONS

Model No.	Maximum Cylinder Capacity (tons)	Stroke (mm)	Maximum Cylinder Capacity (tons)		Cylinder Effective Area (cm²)		Oil Capacity (cm³)		Collapsed Height A (mm)	Extended Height B (mm)	Outside Diameter D (mm)	Cylinder Bore Diam E(mm)	Plunger Diameter F (mm)	Base to Advance Port H(mm)	Top to Retract Port I(mm)	Saddle Diameter J (mm)	Saddle Protrusion from Plunger K(mm)	Center Hole Diameter Y(mm)	Weight (kgs)
			Push	Pull	Push	Pull	Push	Pull											
ADHC302		50			275	162	202	252	138	95	70	35	45	68	11.5	34	9.6		
ADHC306	30	150	38.5	22.7	55	32.4	825	486	327	477	138	95	70	35	45	68	11.5	34	14.8
ADHC3010		250			1374	810	430	680	138	95	70	35	45	68	11.5	34	16.0		
ADHC602		50			448	221	250	300	200	125	100	50	50	89	14	54	15.5		
ADHC606	60	150	62.6	31	89.5	44.2	1342	662	350	500	200	125	100	50	50	89	14	54	23.0
ADHC6010		250			2237	1104	433	683	200	125	100	50	50	89	14	54	30.5		

ALUMINUM CYLINDERS

POWERRAM
HYDRAULIC TOOLS



MODEL:ALNC-SERIES

Capacity: 20 - 100 Ton

Stroke: 50 - 250 mm

Spring Return, Lock Nut Type

Max. Working Pressure: 700 bar / 10,000 psi




FEATURES

- Half weight of the steel cylinders.
- Locknut extend load holding period safely.
- Large saddle surface for side load protection.
- Carrying handles are equipped with all models.
- Hard-Anodized coating reduces wear & corrosion.
- Stop rings for piston blow-out protection.
- Heavy duty spring for fast and full retraction.

Base Plate Mounting Holes Dimensions(mm)

Model No./ Capacity (ton)	Bolt Circle U (mm)	Thread V (mm)	Thread Depth Z (mm)
ALNC-20	70	M6×1.0	10
ALNC-30	80	M6×1.0	10
ALNC-50	110	M6×1.0	10
ALNC-100	160	M6×1.0	10

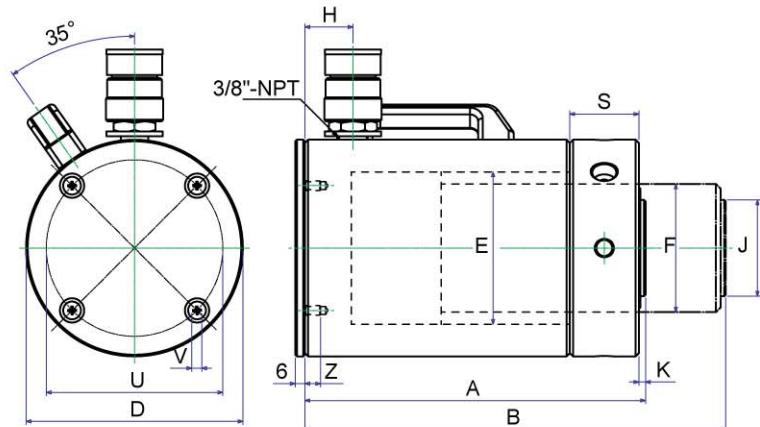

SPECIFICATIONS

Model No.	Capacity (tons)	Stroke (mm)	Cylinder Effective Area (cm²)	Oil Capacity (cm³)	Collapsed Height A (mm)	Extended Height B (mm)	Outside Diameter D (mm)	Cylinder Bore Diam E(mm)	Plunger Diameter (threaded) F(mm)	Base to Advance Port H(mm)	Saddle Diameter J (mm)	Saddle Protrusion from Plunger K(mm)	Lock Nut Height S(mm)	Weight (kgs)
ALNC202	20	50	30.2	151	193	243	92	62	Tr55x3	25	40	3	25	4.8
ALNC204		100	30.2	302	243	343	92	62	Tr55x3	25	40	3	25	5.7
ALNC206		150	30.2	453	293	443	92	62	Tr55x3	25	40	3	25	6.3
ALNC208		200	30.2	604	343	543	92	62	Tr55x3	25	40	3	25	6.9
ALNC302	30	50	44.2	221	205	255	110	75	Tr60x3	25	40	3	30	6.9
ALNC304		100	44.2	442	255	355	110	75	Tr60x3	25	40	3	30	7.7
ALNC306		150	44.2	662	305	455	110	75	Tr60x3	25	40	3	30	8.6
ALNC308		200	44.2	883	355	555	110	75	Tr60x3	25	40	3	30	9.6
ALNC502	50	50	70.8	354	212	262	135	95	Tr80x4	30	60	3	43	9.3
ALNC504		100	70.8	708	262	362	135	95	Tr80x4	30	60	3	43	10.7
ALNC506		150	70.8	1063	312	462	135	95	Tr80x4	30	60	3	43	14.5
ALNC508		200	70.8	1417	362	562	135	95	Tr80x4	30	60	3	43	14.5
ALNC5010	100	250	70.8	1771	412	662	135	95	Tr80x4	30	60	3	43	16.5
ALNC1002		50	143	715	235	285	200	135	Tr105x6	45	70	3	51	21.9
ALNC1004		100	143	1431	285	385	200	135	Tr105x6	45	70	3	51	25.2
ALNC1006		150	143	2146	335	485	200	135	Tr105x6	45	70	3	51	29.2
ALNC1008		200	143	2861	385	585	200	135	Tr105x6	45	70	3	51	33.0
ALNC1010		250	143	3577	438	688	200	135	Tr105x6	45	70	3	51	35.4




MODEL:NSSS-SERIES

Capacity: 4.5 - 100 Ton

Stroke: 25.4 - 406 mm

Max. Working Pressure: 700 bar / 10,000 psi

- All cylinders are single acting with spring return.
- Pistons hard chromed.
- Cylinders inside roll-polished.
- Cylinders outside blasted with black nitriding finish.

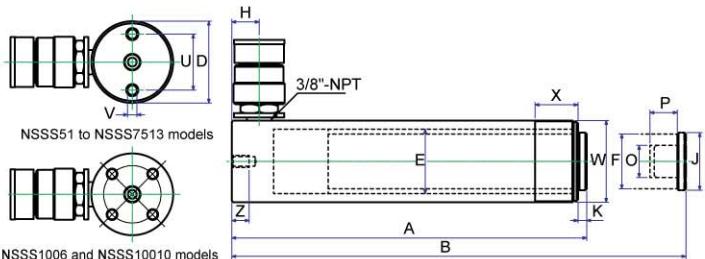


NSSS-SERIES, STANDARD CYLINDERS

Model	Capacity Ton	Stroke (mm)	Oil Cap (cm³)	A HEIGHT(mm) RETRACTED	B HEIGHT(mm) EXTENDED	D Ø mm	E Ø mm	F Ø mm	H mm	J mm	K mm	O Ø UN	P mm	U mm	V Ø UNC	Z mm	W Ø UN	X mm	Weight (kgs)			
NSSS51	4.5	26	17	110	136		28.6					14							1			
NSSS53		76	54	165	241		30					14							1.5			
NSSS55	5	127	90	216	343	38	30	25.4	19	25	6	3/4"-16	14	25	1/4"-20	14	1 1/2"-16	28	1.9			
NSSS57		183	129	273	456		30					16							2.4			
NSSS59		232	164	324	556		30					16							2.8			
NSSS101		25.4	36.5	90	115.4		42.8					#10-24UN	6.5						1.8			
NSSS102		51	73	121	172		42.8					40	6	1"-8	19				2.3			
NSSS104		101	145	171	272		42.8					40	6	1"-8	19				3.3			
NSSS106	10	152.5	242	247	399.5	57	45	38	19			40	6	1"-8	19	39	5/16"-18	13	2 1/4"-14	30	4.4	
NSSS108		203.5	323	298	501.5		45					40	6	1"-8	19				5.4			
NSSS1010		255.5	406	350	605.5		45					40	6	1"-8	19				6.4			
NSSS1012		305.5	486	400	705.5		45					40	6	1"-8	19				6.8			
NSSS1014		356.5	567	451	807.5		45					40	6	1"-8	19				8.2			
NSSS151		26.5	63	124	150.5				19										3.3			
NSSS152		52.5	125	149.6	202.1				19										4.1			
NSSS154		102.5	243	200	302.5				19										5			
NSSS156	15	153	363	271.6	424.6				25										6.8			
NSSS158		203.5	483	322	525.5	73	55	40				25	38	9.6	1"-8	25.4	47.7	3/8"-16	13	2 3/4"-16	30	8.2
NSSS1510		254.5	604	373	627.5				25										9.5			
NSSS1512		305	724	424	729				25										10.9			
NSSS1514		355.7	845	474.6	830.3				25										11.8			
NSSS1516		406	824	523	829				25										12.8			
NSSS251		25.5	98	139.5	165														5.9			
NSSS252		51	196	165	216														6.4			
NSSS254		102	392	216	318														8.2			
NSSS256	25	158.5	610	273	431.5														10			
NSSS258		209.5	806	324	533.5	88	70	55											12.2			
NSSS2510		260.5	1002	375	635.5														14.1			
NSSS2512		311	1196	425.5	736.5														16.3			
NSSS2514		361.5	1390.5	476	837.5														17.7			
NSSS308	30	209.5	925	387.5	597	103	75	60	57	50	10.5	1 1/2"-16	25.4	—	—	—	4"-12	50	18.1			
NSSS502		51	361	177	228														15			
NSSS504		101.5	719	229	330.5														19.1			
NSSS506		157.5	1116	283	440.5	127	95	80	33	70	3	—	—	95	1/2"-13	19	5"-12	55	23.1			
NSSS508		203	1446	349	552														27.1			
NSSS5010		260	1853	385	645														30.4			
NSSS5013		335.5	2377	461	796.5														37.6			
NSSS756	75	155	1752	285	440	152	120	95	30	70	3	—	—	—	—	—	5 3/4"-12	45	29.5			
NSSS7513		333.5	3770	491	824.5														59			
NSSS1002		50	715	238	288														43			
NSSS1004		100	1430	288	388														50			
NSSS1006		170	2432	358	528	177	135	105	40	70	3	—	—	139	3/4"-10	25	6 7/8"-12	45	59			
NSSS10010		260	3720	448	708														72.6			

CYLINDERS

POWERAM
HYDRAULIC TOOLS


Accessories for NSSS series



For NSSS 5, 10, 15 & 25 Ton

Piston Clevis


Model	A	B	C	D	E	F
BCR5	28	41	14	16	16	25
BCR10	43	59	25	22.3	25	34
BCR15	43	62	25	22.3	25	37
BCR25	57	74	38	31.8	31	43

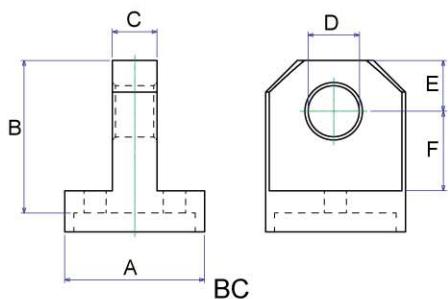

For NSSS 5, 10, 15 & 25 Ton

Base Clevis

Model	A	B	C	D	E	F
BC5	44	48	14	16	16	25
BC10	63	67	25	22.3	25	35
BC15	78.5	67	25	22.3	25	35
BC25	95	79	38	31.8	31	41

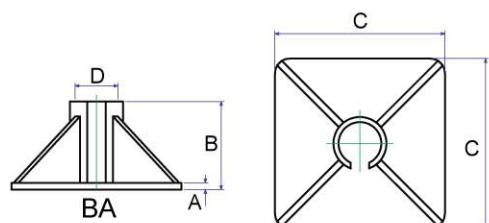


BA10 for NSSS102 through NSSS1014 BA25 for NSSS252 through NSSS2514


Cylinder Bases

Model	A	B	C	D
BA10	10	123	230	58
BA25	16	128	280	89

ATS10 & ATS25



ATS-100

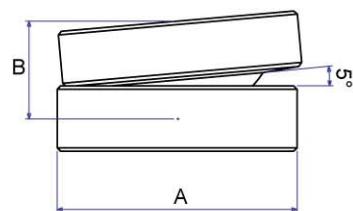

ATS10 for NSSS10T ATS25 for NSSS25T through NSSS30T ATS100 for NSSS50T through NSSS100T

Accessories Tilt Saddles

Model	A	B	C
ATS10	40	11.5	22.2
ATS25	50	14	36.3
ATS100	70	28.5	-



MODEL: NSHS & NRHS SERIES

Capacity: 10 - 100 Ton

Stroke: 8 - 160 mm


Max. Working Pressure: 700 bar / 10,000 psi



- All cylinders are single acting with spring return.
- Pistons hard chromed.
- Cylinders inside roll-polished.
- Cylinders outside blasted with black nitriding finish.
- Use in combination with hand / foot pumps (Page 18-28), and accessories (page 71-77)

NRHS SERIES

- Get the fast retracting speed by Tension spring design.
- Enlarged Plunger size provide stronger gripping force.

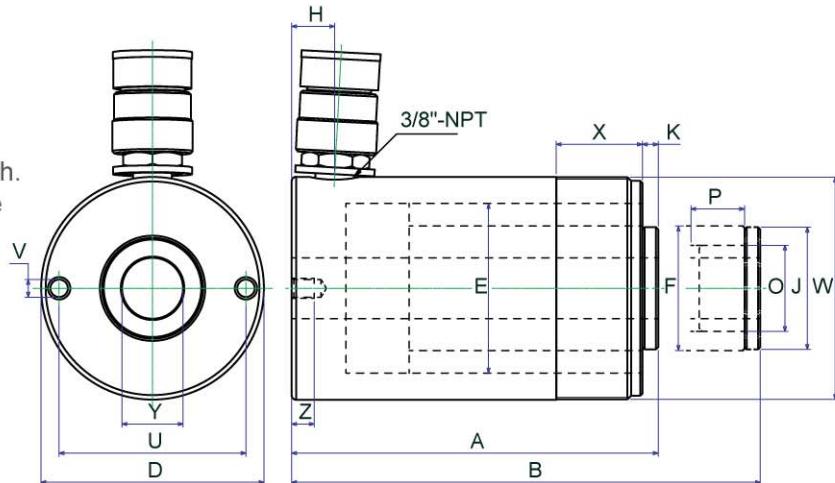

NSHS & NRHS SERIES, HOLLOW PLUNGER CYLINDERS

Model	Capacity Ton	Stroke (mm)	Oil Cap (cm ³)	A HEIGHT(mm) RETRACTED	B HEIGHT(mm) EXTENDED	D Ø mm	E Ø mm	F Ø mm	H mm	J mm	K mm	O Ø UN	P mm	U Ø UNC	Z mm	W Ø UN	X mm	Y Centre Hole (Ø mm)	Weight (kgs)	
NSHS120		8	14.8	60	68			54		12.5			3/4"-16	16			9		1.8	
NSHS121	12	42	79	120	162	73	55		35	19	—	—	—	—		12.7		23/4"-16	33	19.5
NSHS1211		42	79	120	162		55			19			3/4"-16	16	50.8	5 1/16"-18	12.7		3.1	
NSHS123		76	143.2	184	260		55			19			—	—			12.7		4.5	
NSHS202	20	51	173	162	213	98.5	75	55	19	54	7	19 1/16"-16	25	82.6	3/8"-16	9.4	3 7/8"-12	38	27	7.5
NSHS206		155	527	306	461														13.5	
NSHS302	30	65	310	178.5	243.5	117	90	65	21.5	59.9	0.5	1 7/8"-16	25	92	3/8"-16	14	4 1/2"-12	42	34	20.4
NSHS306		160	763	330	490														20.4	
NSHS603	60	76	680	247.5	323.5	158.6	125	90	32	89	12.5	2 3/4"-16	25	130	1 1/2"-13	14	6 1/4"-12	50	54	26.8
NSHS606		152	1360	323.5	475.5														34	
NSHS1003	100	76	1085	254	330	213	165	125	38	125	12	4"-16	30	178	5 5/8"-11	19	8 3/8"-12	60	79	50.1
NRHS102	10	63.5	42.6	135.5	199	76.2	60	52.4	25.4	52	0.5	1 3/4"-12	15	60.3	1 1/4"-20UNC	10	—	—	19.5	4
NRHS108		203	302.3	287.5	490.5														8.5	
NRHS302	30	63.5	271	158.5	222	121	95	79.9	30	79.5	1.5	2 3/4"-12	20	95.3	7/16"-20UNF	14	4 3/4"-20UN	38	33.3	11.4
NRHS306		152.5	651	247.5	400														11.4	




MODEL: NSCS-SERIES

Capacity: 10 - 100 Ton

Stroke: 38 - 62 mm

Max. Working Pressure: 700 bar / 10,000 psi

- All cylinders are single acting with spring return.
- Pistons hard chromed.
- Cylinders inside roll-polished.
- Cylinders outside blasted with black nitriding finish.

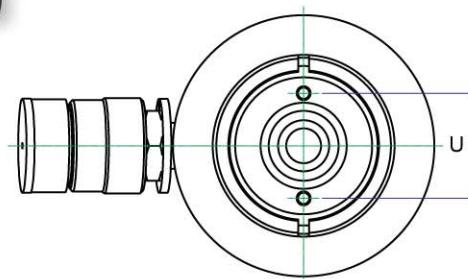


Hand / Foot Pumps

Page 18-28



High Pressure Accessories

Page 71-77

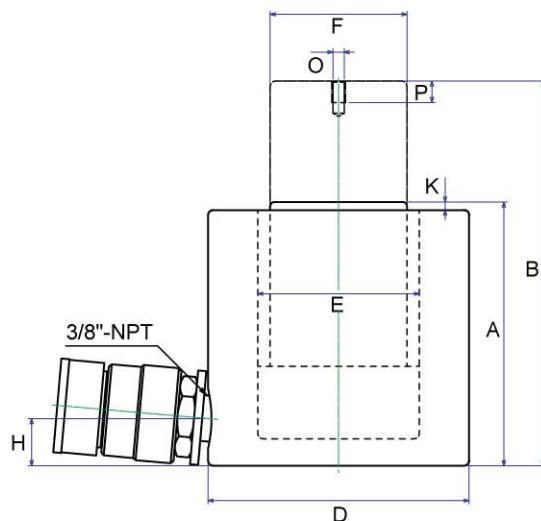

NSCS-SERIES, COMPACT CYLINDERS

Model	Capacity Ton	Stroke (mm)	Oil Cap (cm ³)	A HEIGHT(mm)		C mm	D mm	E Ø mm	F Ø mm	H mm	K mm	V Ø mm	G Ø mm	O Ø mm	P Ø mm	U mm	L mm	M mm	Weight (kgs)
				RETRACTED	EXTENDED														
NSCS101	10	38	55.0	88	126	—	78	42.8	38	17.5	5	—	—	M4	8	26	—	4.1	
NSCS201	20	45	127.0	98	143	—	97	60	50.8	17.5	3	—	—	M5	9	39	—	5	
NSCS302	30	62	274.0	117	179	—	107	75	63.5	19	3	—	—	M5	8	39	—	6.8	
NSCS502	50	60.5	429.0	127	187.5	—	127	95	70	19	2	—	—	M5	8	39	—	10.9	
NSCS1002	100	58	830.0	146.5	204.5	—	165	135	92	25	1.5	—	—	M8	10	55	—	22.7	



MODEL: NSLS-SERIES

Capacity: 5 - 150 Ton

Stroke: 6 - 17 mm

Max. Working Pressure: 700 bar / 10,000 psi

- All cylinders are single acting with spring return.
- Pistons hard chromed.
- Cylinders inside roll-polished.
- Cylinders outside blasted with black nitriding finish.





Hand / Foot Pumps

Page 18-28



High Pressure Accessories

Page 71-77

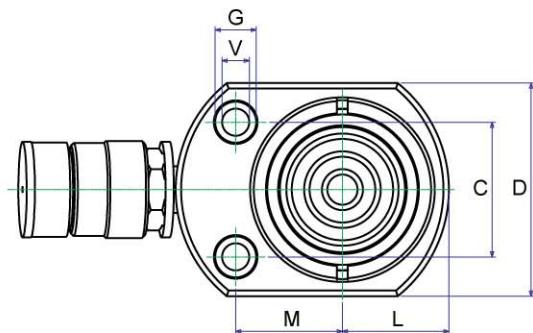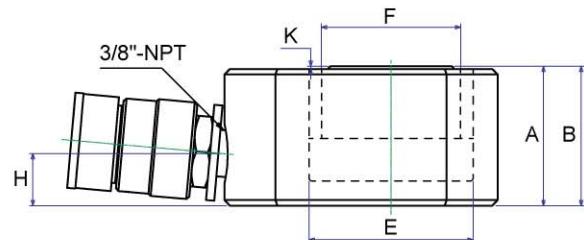

NSLS-SERIES, FLAT CYLINDERS

Model	Capacity Ton	Stroke (mm)	Oil Cap (cm³)	A HEIGHT(mm) RETRACTED	B HEIGHT(mm) EXTENDED	C mm	D mm	E Ø mm	F Ø mm	H mm	K mm	V Ø mm	G Ø mm	O Ø mm	P Ø mm	U mm	L mm	M mm	Weight (kgs)
NSLS50	5	6	4.5	33	39	28.5	58.5x44	31	25.4	16	1	5.3	9.5	—	—	—	22	22	0.7
NSLS100	10	12	18.0	42	54	36.5	82.5x60	44	38	19	1	7.5	11	—	—	—	30	34	1.6
NSLS200	20	12	34.0	51	63	49.3	100x78	60	50.8	19	1	10	15	—	—	—	39	39	2.6
NSLS300	30	13	54.0	58	71	52.3	117.5x95	73	63.5	19	2	10	16	—	—	—	47.5	47.5	4.5
NSLS500	50	16	113.0	66	82	66.5	145x115	95	70	19	2	11	19	—	—	—	57.5	58	6.8
NSL750	75	16	180.0	79	95	76.2	170x145	120	82.5	19	2	13.5	20.5	—	—	—	72.5	70	11.3
NSLS1000	100	16	229.0	85	101	76.2	185x160	135	92	19	2	13.5	20.5	—	—	—	80	78	14.5
NSLS1500	150	17	363.0	100	117	117	225x195	165	115	23	2	13.5	20.5	—	—	—	97.5	85	26.3

MODEL: NSLS-TELESCOPIC SERIES

Capacity: 10 & 20 Ton



Stroke: 13 - 25 mm

Max. Working Pressure: 700 bar / 10,000 psi



FEATURES

- NSLS Telescopic Cylinders have a build-in matting and long stroke.
- They are perfect for those who works with different types of service job in tight spaces and want to combine large forces with long stroke.
- NSLS Telescopic Cylinders are available in two different sizes: 10+5 and 20+10 Ton
- Single Acting.
- Pistons hard chromed.
- Cylinders inside roll-polished.
- Cylinders outside blasted with black nitriding finish.
- Use in combination with hand / foot pumps (Page 18-28), and accessories (page 71-77)

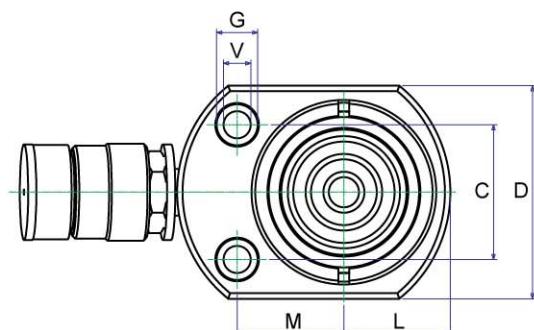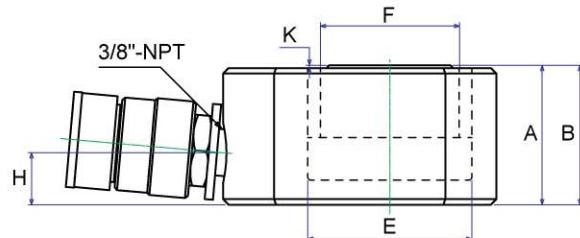

CAUTION!

To prevent damage to the compact system, always load the load at the middle of the lifting piston.

NSLS TELESCOPIC CYLINDERS

Model	Capacity Ton		Stroke (mm)		Oil Cap (cm³) RETRACTED EXTENDED	A	B	C mm	D mm	E Ø mm	F Ø mm	H mm	K mm	V Ø mm	G Ø mm	O Ø mm	P Ø mm	U mm	L mm	M mm	Weight (kgs)
	1st	2nd	S1	S2		HEIGHT(mm)															
NSLS10-05	10	5	13	12	29.0	42	67	36.5	82.5x60	44	38	19	1	7.5	11	—	—	—	30	34	1.6
NSLS20-10	20	10	13	12	55.0	51	76	49.3	100x78	60	50.8	19	1	10	15	—	—	—	39	39	2.6

LOCK NUT CYLINDERS

POWERRAM
HYDRAULIC TOOLS



MODEL:JLLC-SERIES

Capacity: 50 - 1,000 Tons

Stroke: 50 - 300 mm

Max. working pressure: 700 bar / 10,000 psi

Load Return, Lock Nut

FEATURES

- Single-acting, load return.
- Safety Lock nut for mechanical load holding.
- Chrome plated for preventing corrosion and lower friction for smoother operation.
- Withstands side load forces up to 5% of rated cylinder capacity without scoring.
- Overflow port for piston protection.
- Interchangeable, hardened, grooved saddle are standard.
- High flow coupler and dust cap included on all models.

SPECIFICATIONS

Model No.	Capacity (tons)	Stroke (mm)	Collapsed Height A (mm)	Extended Height B (mm)	Weight (kgs)
JLLC502		50	164	214	15
JLLC506	50	150	264	414	25
JLLC5010		250	364	614	35
JLLC1002		50	187	237	30
JLLC1006	100	150	287	437	48
JLLC10010		250	387	637	64
JLLC1502		50	209	259	53
JLLC1506	150	150	309	459	78
JLLC15012		300	459	759	117
JLLC2002		50	243	293	83
JLLC2006	200	150	343	493	117
JLLC20012		300	493	793	170
JLLC3002		50	295	345	173
JLLC3006	300	150	395	545	233
JLLC30012		300	545	845	323
JLLC4002		50	335	385	250
JLLC4006	400	150	435	585	327
JLLC40012		300	585	885	441
JLLC5002		50	375	425	367
JLLC5006	500	150	475	625	466
JLLC50012		300	625	925	617
JLLC6002		50	395	445	446
JLLC6006	600	150	495	645	562
JLLC60012		300	645	945	737
JLLC8002		50	455	505	709
JLLC8006	800	150	555	705	870
JLLC80012		300	705	1005	1110
JLLC10002		50	495	545	949
JLLC10006	1000	150	595	745	1141
JLLC100012		300	745	1045	1430

Hand / Foot Pumps

Page 18-28



Power Pumps



Page 29-40





LOCK NUT CYLINDERS

POWERAM
HYDRAULIC TOOLS


MODEL:JLLC50 - JLLC200

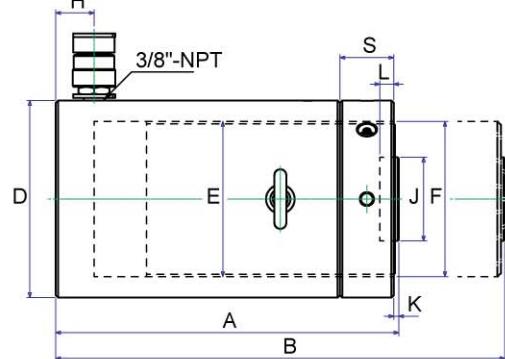

MODEL:JLLC300 - JLLC1000

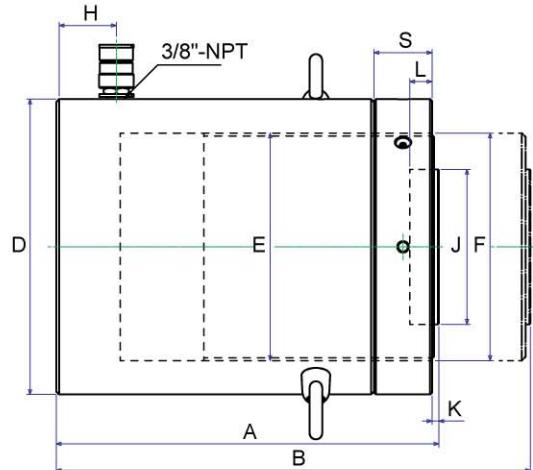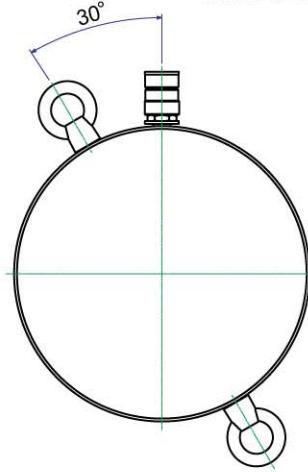

TSA-Optional Tilt Saddle

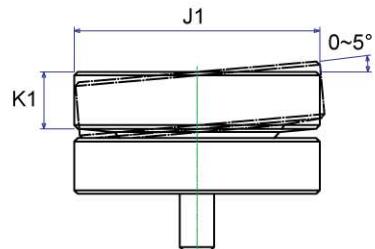

Model No.	Cylinder Effective Area (cm²)	Oil Capacity (c.c.)	Outside Diameter D (mm)	Cylinder Bore Diam E (mm)	Plunger Diameter F (mm)	Base to Advance Port H (mm)	Saddle Diameter J (mm)	Saddle Protrusion from Plunger K (mm)	Depth of Plunger Hole L (mm)	Lock Nut Height S (mm)	Model No.	Optional Tilt Saddle		
												Dia. J1 (mm)	Height K1 (mm)	Model Number
JLLC502	70.9	354.5	125	95	Tr95x4	20	70	4	13	35	JLLC502	70	22	TSA-100
JLLC506	70.9	1063.5	125	95	Tr95x4	20	70	4	13	35	JLLC506	70	22	TSA-100
JLLC5010	70.9	1772.5	125	95	Tr95x4	20	70	4	13	35	JLLC5010	70	22	TSA-100
JLLC1002	133	665	165	130	Tr130x4	32	70	4	13	45	JLLC1002	70	22	TSA-100
JLLC1006	133	1995	165	130	Tr130x4	32	70	4	13	45	JLLC1006	70	22	TSA-100
JLLC10010	133	3325	165	130	Tr130x4	32	70	4	13	45	JLLC10010	70	22	TSA-100
JLLC1502	201	1005	205	160	Tr160x6	49	125	4	25	45	JLLC1502	125	20	TSA-200
JLLC1506	201	3015	205	160	Tr160x6	49	125	4	25	45	JLLC1506	125	20	TSA-200
JLLC15012	201	6030	205	160	Tr160x6	49	125	4	25	45	JLLC15012	125	20	TSA-200
JLLC2002	269	1345	235	185	Tr185x6	52	125	4	25	50	JLLC2002	125	20	TSA-200
JLLC2006	269	4035	235	185	Tr185x6	52	125	4	25	50	JLLC2006	125	20	TSA-200
JLLC20012	269	8070	235	185	Tr185x6	52	125	4	25	50	JLLC20012	125	20	TSA-200
JLLC3002	433.5	2167.5	305	235	Tr235x6	62	160	5	25	60	JLLC3002	195	75	TSA-300
JLLC3006	433.5	6502.5	305	235	Tr235x6	62	160	5	25	60	JLLC3006	195	75	TSA-300
JLLC30012	433.5	13005	305	235	Tr235x6	62	160	5	25	60	JLLC30012	195	75	TSA-300
JLLC4002	551	2755	355	265	Tr265x6	76	160	5	25	70	JLLC4002	225	85	TSA-400
JLLC4006	551	8265	355	265	Tr265x6	76	160	5	25	70	JLLC4006	225	85	TSA-400
JLLC40012	551	16530	355	265	Tr265x6	76	160	5	25	70	JLLC40012	225	85	TSA-400
JLLC5002	706.5	3532.5	395	300	Tr300x6	81	180	5	25	80	JLLC5002	250	90	TSA-500
JLLC5006	706.5	10597.5	395	300	Tr300x6	81	180	5	25	80	JLLC5006	250	90	TSA-500
JLLC50012	706.5	21195	395	300	Tr300x6	81	180	5	25	80	JLLC50012	250	90	TSA-500
JLLC6002	854.9	4274	425	330	Tr330x6	89	195	5	25	85	JLLC6002	275	95	TSA-600
JLLC6006	854.9	12823	425	330	Tr330x6	89	195	5	25	85	JLLC6006	275	95	TSA-600
JLLC60012	854.9	25646	425	330	Tr330x6	89	195	5	25	85	JLLC60012	275	95	TSA-600
JLLC8002	1194	5970	505	390	Tr390x6	105	225	5	25	100	JLLC8002	320	120	TSA-800
JLLC8006	1194	17910	505	390	Tr390x6	105	225	5	25	100	JLLC8006	320	120	TSA-800
JLLC80012	1194	35820	505	390	Tr390x6	105	225	5	25	100	JLLC80012	320	120	TSA-800
JLLC10002	1451.5	7257	555	430	Tr430x6	108	250	5	25	110	JLLC10002	360	135	TSA-1000
JLLC10006	1451.5	21772	555	430	Tr430x6	108	250	5	25	110	JLLC10006	360	135	TSA-1000
JLLC100012	1451.5	43544	555	430	Tr430x6	108	250	5	25	110	JLLC100012	360	135	TSA-1000

LOCK NUT CYLINDERS

POWERRAM
HYDRAULIC TOOLS



MODEL:JLPC-SERIES

Capacity: 60 - 250 Tons

Stroke: 45 & 50 mm

Max. working pressure: 700 bar / 10,000 psi

Load Return



FEATURES

- Extremely low height for use in confined areas
- Single-acting, load return.
- Lock nut for positive and safe load holding over a long period of time.
- Chrome plated for preventing corrosion and lower friction for smoother operation.
- Withstands sideload forces up to 3% of rated cylinder capacity without scoring.
- Overflow port functions as a stroke limiter.
- High flow coupler and dust cap included on all models

Hand / Foot Pumps

Page 18-28




Power Pumps

Page 29-40



MODEL:JLPC60 - 250

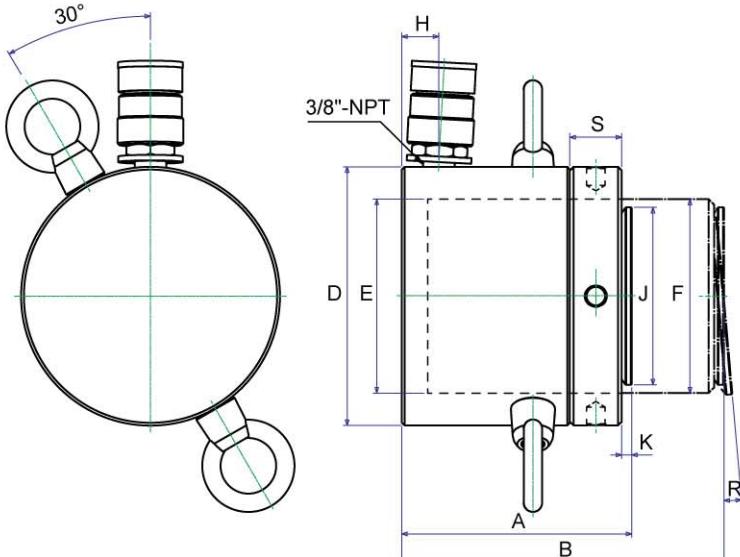

SPECIFICATIONS

Model No.	Cylinder Capacity (tons)	Stroke (mm)	Cylinder Effective Area (cm²)	Oil Capacity (c.c.)	Collapsed Height A (mm)	Extended Height B (mm)	Outside Diameter D (mm)	Cylinder Bore Diam E (mm)	Plunger Diameter F (mm)	Base to Advance Port H (mm)	Saddle Diameter J (mm)	Saddle Protrusion from Plunger K (mm)	Saddle Max. Tilt Angle R	Lock Nut Height S (mm)
JLPC602	60	50	86.6	433	124	174	140	105	Tr105x6	20	96	5	5°	28
JLPC1002	100		143	715	137	187	175	135	Tr135x6	21	126	8	5°	31
JLPC1502	150		214	963	148	193	220	165	Tr165x6	27	150	9	5°	40
JLPC2002	200	45	283	1273.5	155	200	245	190	Tr190x6	30	180	10	5°	43
JLPC2502	250		363	1633	159	204	275	215	Tr215x6	32	200	11	5°	44

DOUBLE ACTION CYLINDERS

POWERAM
HYDRAULIC TOOLS



MODEL: NDAC-SERIES

Capacity: 10 - 100 Tons

Stroke: 150 - 470 mm

Max. working pressure: 700 bar / 10,000 psi

Double action


FEATURES

- Perfect for construction, shipyard, utility, mining and equipment maintenance shops.
- Piston hard chromed.
- Cylinders inside roll-polished.
- Cylinders outside blasted with black nitriding finish.

Hand / Foot Pumps Page 18-28



Power Pumps Page 29-40

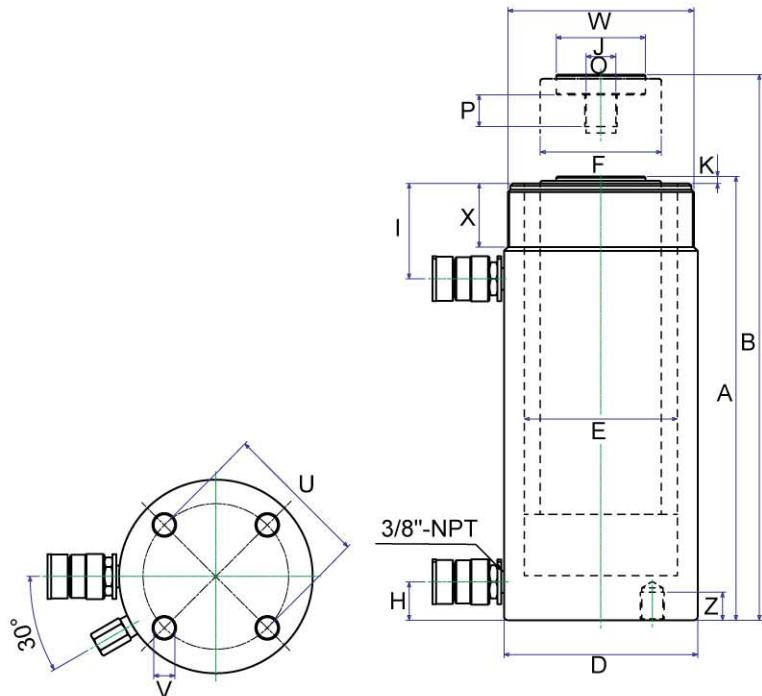

SPECIFICATIONS

Model No.	Cap. (Ton)		Stroke (mm)	Oil Cap. (cm³)		A Height(mm) Retracted Extended	B Ømm	D Ømm	E Ømm	F Ømm	H mm	I mm	J Ømm	K mm	O ØUN	P mm	U mm	V Ø UNC	Z mm	W ØUN	X mm	Y Center Hole (Ø mm)	Weight (kgs)	
	Push	Pull		Push	Pull																			
NDAC1010	10	4	251	399	144	408	659	78	45	36	36.5	55	40	8	1"-8	25.4	--	--	--	2 ¹ / ₄ "-14	27	--	13	
NDAC1012			301	478	172	458	759																	15
NDAC308	30	14	209	923	426	387	596	103	75	55	25	75	50	12	1 ¹ / _{2"-16}	25.4	--	--	--	4"-12	50	--	20	
NDAC3014			368	1625	751	547	915																	29
NDAC506			150	1062	309	331	481																	29
NDAC5013	50	14	330	2338	680	511	841	127	95	80	30	70	70	5	1"-12	25.4	88.9	5 ¹ / ₈ "-11	22	5"-12	50	--	43	
NDAC5018			470	3330	968	675	1145																	59
NDACT756	75	29.5	155	1752	654	348	503	152	120	95	30	75	70	5	1"-12	38	114.3	3 ¹ / ₄ "-10	22	5 ³ / ₄ "-12	45	--	40	
NDAC7513			333	3764	1405	526	859																	58
NDAC1006	100	50.6	160	2289	1155	358	518	177	135	95	38	71	80	5	1 ³ / ₄ "-12	35	139.7	3 ¹ / ₄ "-10	25	6 ⁷ / ₈ "-12	50	--	59	
NDAC10013			330	4721	2383	528	858																	83

DOUBLE ACTION CYLINDERS

POWERRAM
HYDRAULIC TOOLS



MODEL:NDAH-SERIES

Capacity: 30 - 100 Tons

Stroke: 76 - 257 mm

Max. working pressure: 700 bar / 10,000 psi
Double action, Hollow Plunger Cylinders.

FEATURES

- All cylinders are hollow and double action .
- Piston hard chromed.
- Cylinders inside roll-polished.
- Cylinders outside blasted with black nitriding finish.


Hand / Foot Pumps

Page 18-28



Power Pumps

Page 29-40

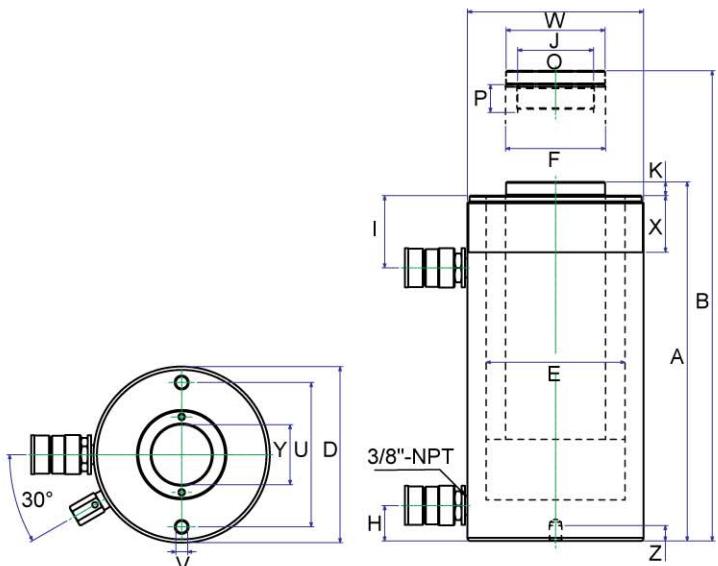

SPECIFICATIONS

Model No.	Cap. (Ton)		Stroke (mm)	Oil Cap. (cm³)		A B		D Ømm	E Ømm	F Ømm	H mm	I mm	J Ømm	K mm	O ØUN	P mm	U mm	V Ø UNC	Z mm	W ØUN	X mm	Y Center Hole (Ø mm)	Weight (kgs)	
	Push	Pull		Push	Pull	Height(mm)	Retracted																	
NDAH307	30	21	178	849	541	330	508	117	90	65	21.5	60.5	60	0.5	17/8"-16	25	92	3/8"-16	14	41/2"-12	42	34	22	
NDAH3010			257	1226	782	431	688							10										27
NDAH603			89	797	526	247.5	336.5																	28
NDAH606	60	41	165	1477	975	323.5	488.5	158.6	125	90	32	65	89	12.5	23/4"-16	25	130	1 1/2"-13	14	61/4"-12	50	54	35	
NDAH6010			257	2300	1518	437.5	694.5																	45
NDAH1003			76	1086	692	254	330																	52
NDAH1006	100	64	152	2172	1384	325	477	213	165	125	38	82	125	12	4"-16	30	178	5/8"-11	19	83/8"-12	60	79	65	
NDAH10010			256	3656	2331	462	718																	88

HEAVY-DUTY HAND PUMPS

POWERAM
HYDRAULIC TOOLS



P901



P902



P903




P904



P905

FEATURES

- High pressure hydraulic hand pumps are the solution for tough jobs.
- Reduced handle effort and ergonomic grip for less operator fatigue.
- Dual-speed operation for fast and easy operation.
- Vent free reservoir eliminates spills.
- Quick grip handle allows for easy transport.
- Integral reservoir with over-pressurization protection.
- Chrome plated plunger and wiper system for durable, long lasting performance.

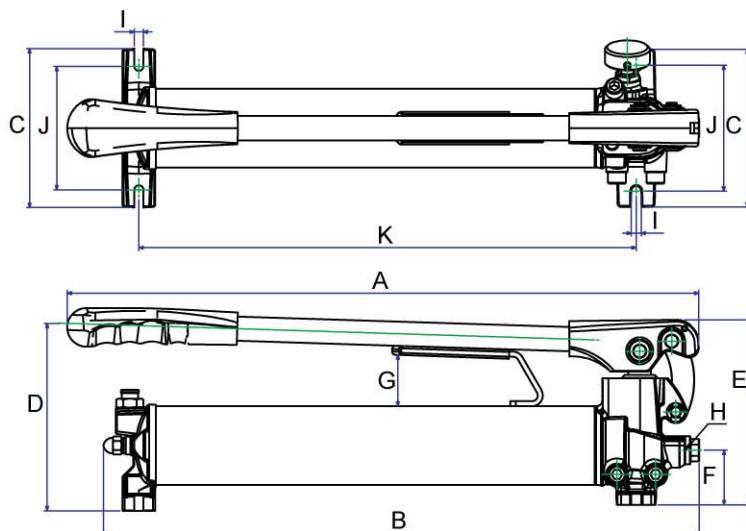

SPECIFICATIONS

Model No.	Pressure Rating (bar)		Oil Capacity (c.c.)	Usable Oil Capacity (c.c.)	Oil Volume per stroke (c.c.)		A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	J (mm)	K (mm)	Weight (kgs)	
	1st stage	2nd stage			1st stage	2nd stage													
P901	20	700	450	300	19.4	1.2	447	369.5	140	163	164	48.5	45			8	112	282	6.5
P902	20	700	850	750	19.4	2.8	560	530	140	167	164	48.5	45			8	112	442	7.8
P903	20	700	1600	1400	19.4	2.8	633	597.5	140	170	164	48.5	36.5			8	112	510	10
P904	27.5	700	2500	2200	39.5	2.8	633	578	150	208	195	55	46		3/8"NPT	8	121	502	13.5
P904D	27.5	700	2500	2200	35.6	2.8	633	609	150	208	195	38	47			8	121	502	15
P905	20	1000	850	750	19.4	1.2	560	530	140	167	164	48.5	45			8	112	442	7.8

ALUMINUM HAND PUMPS

POWERRAM
HYDRAULIC TOOLS



AHP703D



UHP2800

The guage can be mounted directly on **UHP2800JQ**



MODEL: AHP & UHP SERIES

Single & Dual-speed models

Large 3/8" pressure port for maximum flow

Max. working pressure: 700 - 2800 bar



AHP705



AHP701

FEATURES

- Rugged construction and light handle efforts.
- Aluminum Alloy construction and handy release knob with anti-losing mechanism are truly suitable to industrial requirements and your daily works.
- The light weight design is ideally for easy operation and portability.
- Double action design on **AHP703D** is ideal for double acting cylinders, no extra control valve and adapters are requested.
- **UHP2800** brings you special ultra high pressure application but with light weight.
- **UHP2800JQ** directly mounted with Pressure gauge and no extra adaptors needed. More efficient and convenient.

SPECIFICATIONS

Model No.	Pressure Rating (bar)		Oil Capacity (c.c.)	Usable Oil Capacity (c.c.)	Oil Volume Per Stroke (c.c.)		A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I	Weight (kgs)
	1st stage	2nd stage			1st stage	2nd stage										
AHP701	20	700	500	350	12.9	1.65	391	361	110	77	140	127	42.5			2.3
AHP702	20	700	1000	750	12.9	1.65	542	513	110	77	130	127	42.5			3.5
AHP703	20	700	2000	1620	12.9	2.30	623	556	150	102	135	135	50			6
AHP703D	20	700	2000	1620	12.9	2.30	623	556	150	102	135	135	24/37			7.0
AHP704	20	1000	1000	750	12.9	1.65	539	501	110	77	145	127	42.5	37		3.5
AHP705	20	1500	2000	1620	12.9	1.00	699	629	150	102	152	157	50			6.7
UHP2800	20	2800	1000	700	12.9	0.65	620	488	79.5	140	157	156.5	26			6.7
UHP2800JQ	20	2800	1000	700	12.9	0.65	617	568	79.5	140	157	156.5	93			9/16"-18UNF

STEEL HAND PUMPS

POWERRAM
HYDRAULIC TOOLS



HA600



HA350

MODEL: HA-HF SERIES
Single & Dual-speed models
Large 3/8" pressure port for maximum flow.
Max. working pressure: 700 bar



HC1500




HE2000

FEATURES

- Rugged construction and light handle efforts.
- Handy release knobs with anti-leaking mechanism are truly suitable to industrial requirement and your daily works.
- Both single and Dual-speed models are available.
- Internal overload relief valve prevents pump from being used beyond its rated capacity.
- External adjustable relief valve with anti-loosing mechanism design.
- Carrying handle for easy portability.
- **HE2421** equipped with Control valve for applying with double action cylinders.

SPECIFICATIONS

Model No.	Pressure Rating (bar)		Oil Capacity (c.c.)	Usable Oil Capacity (c.c.)	Oil Volume Per Stroke (c.c.)		A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Oil Port Thread F	Weight (kgs)
	1st Stage	2nd Stage			1st Stage	2nd Stage							
HB350	20	700	350	250	13.0	2.8	343	310	66	146	142	3/8 NPT	5.9
HB600	20	700	750	550	13.0	2.8	543	480	90	146	142	3/8 NPT	7.6
HB700	20	700	850	640	13.0	2.8	633	528	90	146	142	3/8 NPT	8
HC1500	20	700	1500	1200	13.0	2.8	633	551	106	200	142	3/8 NPT	11.2
HC2500	20	700	2500	2200	13.0	2.8	713	632	106	200	142	3/8 NPT	12
HE2000	20	700	2100	1800	13.0	2.8	580	523	140	189	148	3/8 NPT	11.5
HE2421	20	700	2100	1800	13.0	2.8	580	523	140	189	148	-	12.0
HF350	20	700	350	280	7.0	1.0	343	310	66	127	142	3/8 NPT	5.5
HA350	700		350	280	3.2		343	292	90	146	142	3/8 NPT	5.7
HA600	700		750	600	3.2		543	478	90	146	142	3/8 NPT	7.1
HA700	700		850	640	3.2		633	526	90	146	142	3/8 NPT	7.6
HD300	700		300	200	2.8		330	283	90	127	130	1/4 NPT	4.4
HD500	700		500	400	2.8		530	469	90	127	130	1/4 NPT	5.4

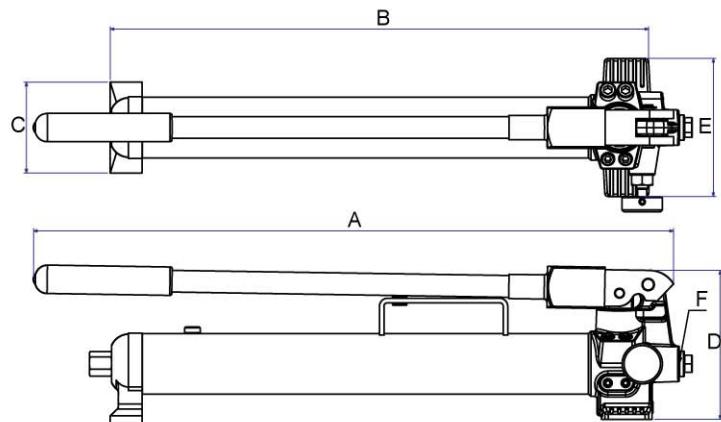

HEAVY-DUTY HAND PUMPS

POWERRAM
HYDRAULIC TOOLS





MODEL: PA & PB SERIES

Single & Dual-speed models
Large 3/8" pressure port for max. flow
Low handle force for easy operation
Max. working pressure: 700 bar



FEATURES

- POWERRAM heavy duty hand pumps are feature with forged and welded construction to prevent collision and deformation.
- Professional choice for a wide range of industrial applications.
- Both single and Dual-speed models are available.
- Internal overload valve relief prevents pump from being used beyond its rated capacity.
- External adjustable relief valve with anti-losing mechanism design.
- Carrying handle for easy portability.

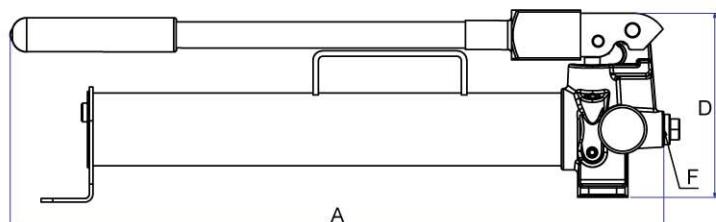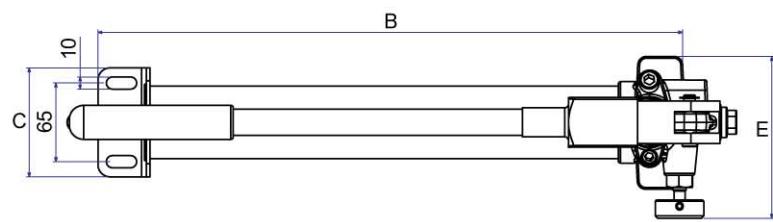

SINGLE-SPEED HEAVY-DUTY HAND PUMPS

Model No.	Pressure Rating (bar)	Usable Oil Capacity (c.c.)	Oil Volume Per Stroke (c.c.)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Oil Port Thread F	Weight (kgs)
PA350	700	350	3.1	335	295	90	146	128	3/8 NPT	5
PA600	700	600	3.1	545	485	90	146	128	3/8 NPT	6.1
PA700	700	700	3.1	632	533	90	146	128	3/8 NPT	6.5

TWO-SPEED HEAVY-DUTY HAND PUMPS

Model No.	Pressure Rating (bar)		Usable Oil Capacity (c.c.)	Oil Volume Per Stroke (c.c.)		A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Oil Port Thread F	Weight (kgs)
	1st Stage	2nd Stage		1st Stage	2nd Stage							
PB350	13.8	700	350	13.0	2.8	335	303	90	146	128	3/8 NPT	5.5
PB600	13.8	700	600	13.0	2.8	545	493	90	146	128	3/8 NPT	7
PB700	13.8	700	700	13.0	2.8	590	541	90	146	128	3/8 NPT	7.3

HAND PUMP PACKAGES

POWERAM
HYDRAULIC TOOLS



MODEL: PUMP BG SERIES

Dual-speed models

Low handle effort for easy operation

Max. working pressure: 700 - 2,800 bar



FEATURES

- Packed with steel case for easy storage and portable works.
- 700 bar pump sets are including gauge adaptor, pressure gauge and 1.5mtrs hose.
- 1000 - 2800 bar pump sets are including ultra high pressure gauge and hose for special applications.

SPECIFICATIONS

Model No.	Pressure Rating (bar)		Oil Capacity (c.c.)	Oil Volume Per Stroke (c.c.)		Pressure Gauge	Hydraulic Hose	Weight (kg)
	1st Stage	2nd Stage		1st Stage	2nd Stage			
PB350BG	13.8	700	350	13.0	2.8			12.4
PB600BG	13.8	700	600	13.0	2.8			13.8
PB700BG	13.8	700	700	13.0	2.8			14.0
HC1500BG	13.8	700	1500	13.0	2.8			22.6
HC2000BG	13.8	700	2000	13.0	2.8			24.8
AHP701BG	20	700	500	12.9	1.65			10.4
AHP702BG	20	700	1000	12.9	1.65	1000 bar / 2-1/2" Dial	3/8NPT / 5 feet long	11.1
AHP703BG	20	700	2000	12.9	2.30			18.1
AHP703DBG	20	700	2000	12.9	2.30			21.0
P901BG	20	700	450	19.4	1.2			14.6
P902BG	20	700	850	19.4	2.8			15.4
P903BG	20	700	1600	19.4	2.8			22.1
P904BG	27.5	700	2500	39.5	2.8			34.5
P904DBG	27.5	700	2500	35.6	2.8			37.0
P905BG	20	1000	850	19.4	1.2	1600 bar / 4" Dial	G1/4 / 6 feet long	30.5
AHP704BG	20	1000	1000	12.9	1.65	1600 bar / 4" Dial	G1/4 / 6 feet long	24.5
AHP705BG	20	1500	2000	12.9	1.00	2500 bar / 4" Dial	G1/4 / 6 feet long	27.0
UHP2800BG	20	2800	1000	12.9	0.65	4000 bar / 4" Dial	G1/4 / 6 feet long	28.0

HEAVY DUTY HAND PUMPS

POWERRAM
HYDRAULIC TOOLS

MODEL: HP35 & HP35D


Dual-speed model

Large 3/8" pressure port for maximum flow.





Max. working pressure: 700 bar



MODEL:HP35

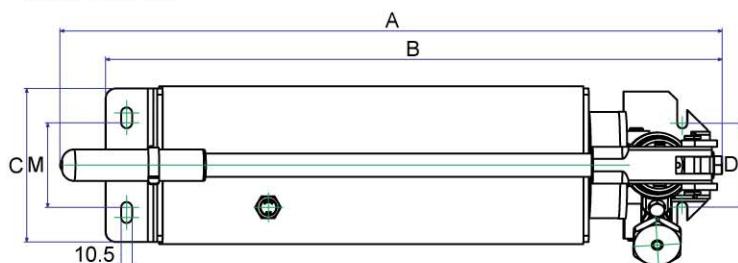

MODEL:HP35D (Double-Acting)

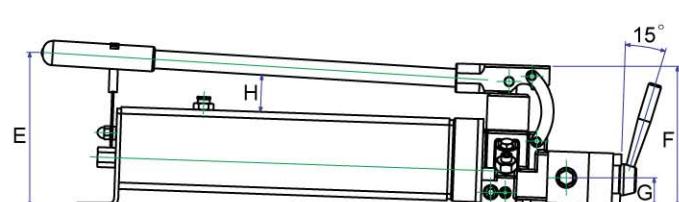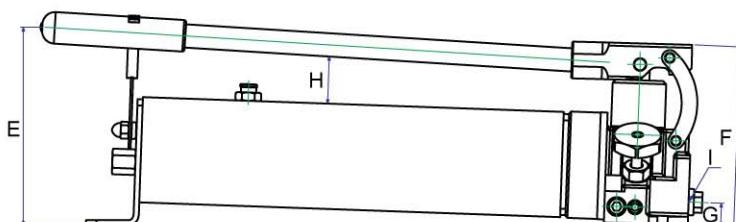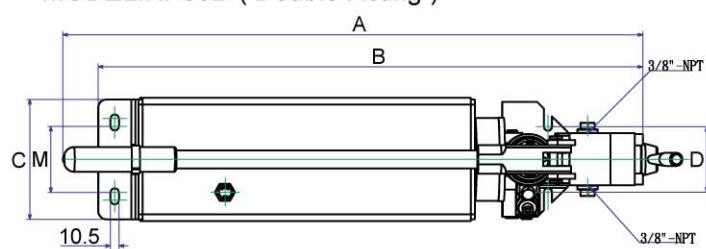

Hoses & Adaptors
Page 71-77



Manifolds & Control Valves
Page 71-77



SPECIFICATIONS

Model No.	Pressure Rating (bar)		Usable Oil Capacity (c.c.)	Oil Volume Per Stroke (c.c.)		A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	M (mm)	Weight (kgs)
	1st stage	2nd stage		1st stage	2nd stage											
HP35	28	700	3500	30	3	628	586	146	79.7	190	79.7	22.35	45	3/8"-NPT	80.5	16.5
HP35D	28	700	3500	30	3	715	662	146	79.7	190	79.7	36	45	3/8"-NPT	80.5	16.8

7L RESERVOIR HAND PUMPS

POWERRAM
HYDRAULIC TOOLS



HP80

MODEL: HP80 & HP80D

Dual-speed models

Large 3/8" pressure port for max. flow

Heavy-Duty, Large reservoir




Max. working pressure: 700 bar



HP80D

FEATURES

- Casting tank made of steel.
- Internal overload relief valve prevents pump from being used beyond its rated capacity.
- HP80D is ideal for double-acting cylinders without the need for additional control valve.

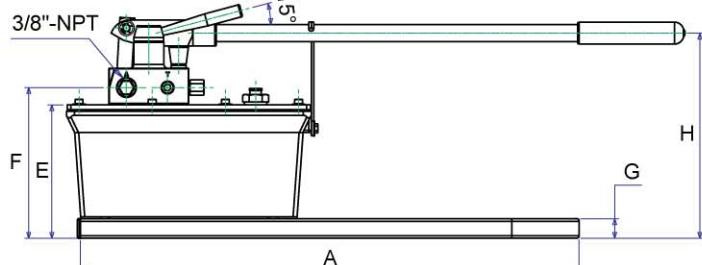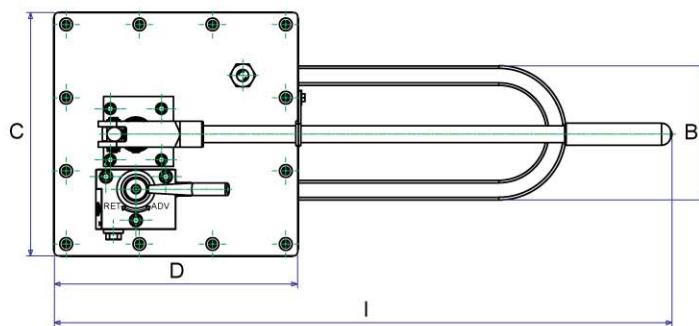

SPECIFICATION

Model No.	Pressure Rating (bar)		Usable Oil Capacity (c.c.)	Oil Volume Per Stroke (c.c.)		A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	J (mm)	Weight (kg)
	1st stage	2nd stage		1st stage	2nd stage											
HP80	27.5	700	8000	113	4	635	171	310	310	170	192	25	261	787	298	24
HP80D	27.5	700	8000	113	4	635	171	310	310	170	196	25	261	787	298	25

SPECIAL HAND PUMPS

POWERAM
HYDRAULIC TOOLS



P350A



P350B

MODEL: P350 SERIES

Dual-speed models

Could be operated in any directions

Large 3/8" pressure port for max. flow

Max. working pressure: 700 bar




P350D


FEATURES

- Special design with aluminum alloy construction as much light weight is ideally for easy portability and maneuvering.
- The sealed oil reservoir design allows the hand pumps to be operated at all angles without the risk of air contamination and oil spills.
- The best optional hand pumps allow for sub-sea operation.
- Unique design of triangle hand-held base is easy to carry & operate.
- A: Single-port hand pump is used for one single-acting cylinder
- B: Twin-port hand pump is used for two single-acting cylinders simultaneously
- D: Double-acting hand pump is used for one double-acting cylinder

MODEL: P350A & P350B

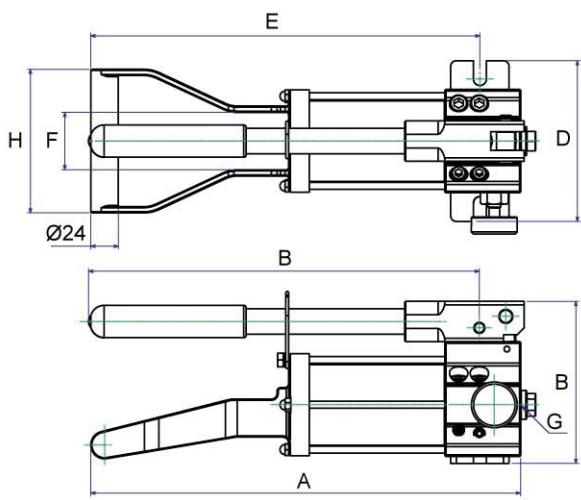

MODEL: P350D

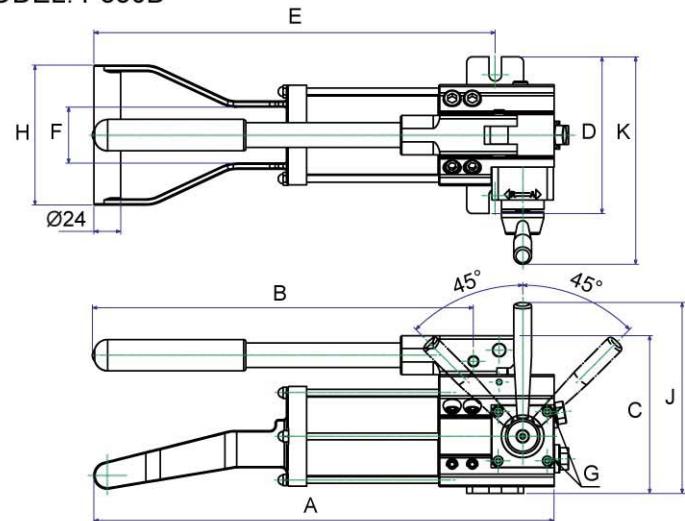

SPECIFICATIONS

Model No.	Pressure (bar)		Usable Oil Capacity (c.c.)		Oil Volume Per Stroke (c.c.)		A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	J (mm)	K (mm)	Weight (kgs)
	1st stage	2nd stage	1st stage	2nd stage	1st stage	2nd stage											
P350A	20	700	350	5.8	0.9	374	340	140	140	338.5	50	3/8"-NPT	125	—	—	4.4	
P350B	20	700	350	5.8	0.9	421	340	140	140	363.5	50	3/8"-NPT	125	—	—	6.2	
P350D	20	700	350	5.8	0.9	411	340	140	140	358.5	50	3/8"-NPT	125	171	185	5.3	

SPECIAL HAND PUMPS

POWERRAM
HYDRAULIC TOOLS



P550A



P550D

MODEL: P550 SERIES

Dual-speed models

Could be operated in any directions

Large 3/8" pressure port for max. flow

Max. working pressure: 700 bar




P550B


FEATURES

- Special design with aluminum alloy construction as much light weight is ideally for easy portability and maneuvering.
- The sealed oil reservoir design allows the hand pumps to be operated at all angles without the risk of air contamination and oil spills.
- The best optional hand pumps allow for sub-sea operation.
- Unique design of triangle hand-held base is easy to carry & operate.
- A: Single-port hand pump is used for one single-acting cylinder
- B: Twin-port hand pump is used for two single-acting cylinders simultaneously
- D: Double-acting hand pump is used for one double-acting cylinder

MODEL: P550A & P550B

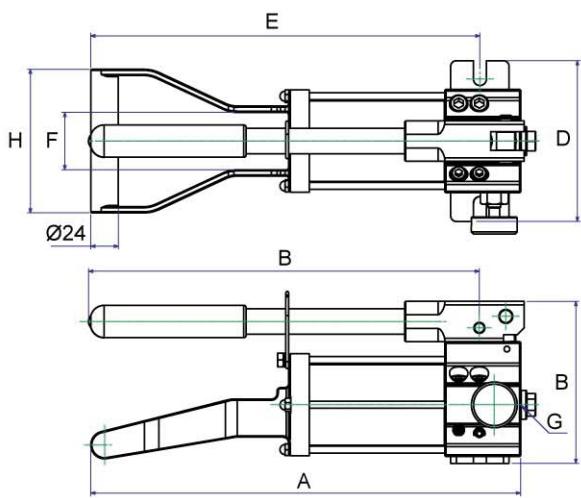

MODEL: P550D

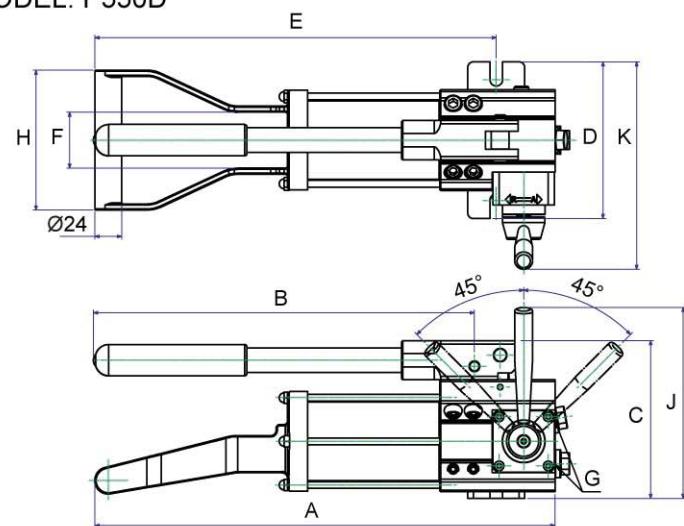

SPECIFICATIONS

Model No.	Pressure Rating (bar)		Usable Oil Capacity (c.c.)	Oil Volume Per Stroke (c.c.)		A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	J (mm)	K (mm)	Weight (kgs)
	1st stage	2nd stage		1st stage	2nd stage											
P550A	20	700	550	5.8	0.9	494	463	140	140	458.5	50	3/8"-NPT	125	—	—	6
P550B	20	700	550	5.8	0.9	541	463	140	140	483.5	50	3/8"-NPT	125	—	—	7.1
P550D	20	700	550	5.8	0.9	531	463	140	140	478.5	50	3/8"-NPT	125	171	185	5.5

SPECIAL HAND PUMPS

POWERRAM
HYDRAULIC TOOLS



P1000A



P1000D




P1000B


FEATURES

- Special design with aluminum alloy construction as much light weight is ideally for easy portability and maneuvering.
- The sealed oil reservoir design allows the hand pumps to be operated at all angles without the risk of air contamination and oil spills.
- The best optional hand pumps allow for sub-sea operation.
- Unique design of triangle hand-held base is easy to carry & operate.
- A: Single-port hand pump is used for one single-acting cylinder
- B: Twin-port hand pump is used for two single-acting cylinders simultaneously
- D: Double-acting hand pump is used for one double-acting cylinder

MODEL: P1000A & P1000B

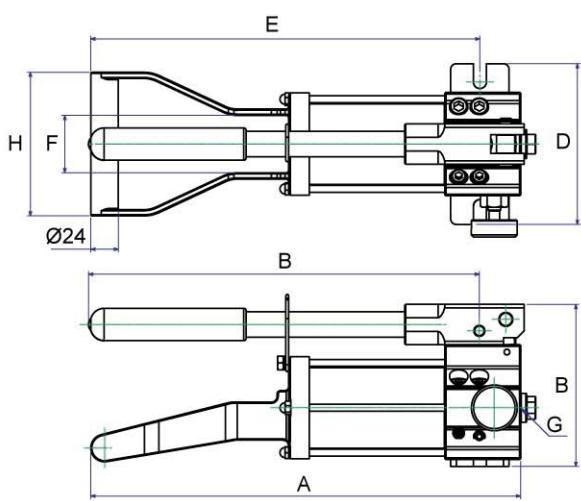

MODEL: P1000D

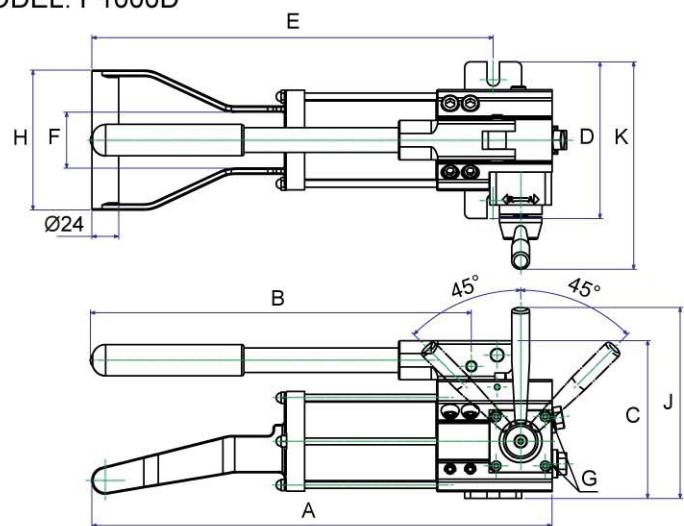

SPECIFICATIONS

Model No.	Pressure Rating (bar)		Usable Oil Capacity (c.c.)		Oil Volume Per Stroke (c.c.)		A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	J (mm)	K (mm)	Weight (kgs)
	1st stage	2nd stage	1st stage	2nd stage	1st stage	2nd stage											
P1000A	20	700	1000	5.8	0.9	694	568	140	140	658.5	50	3/8"-NPT	125	—	—	6.6	
P1000B	20	700	1000	5.8	0.9	741	568	140	140	683.5	50	3/8"-NPT	125	—	—	8.3	
P1000D	20	700	1000	5.8	0.9	731	568	140	140	678.5	50	3/8"-NPT	125	171	185	7.7	

STEEL FOOT PUMPS

POWERRAM
HYDRAULIC TOOLS

MODEL: FHA & FHB SERIES

Single & Dual-speed models

Large 3/8" pressure port for max. flow

Low handle force for easy operation

Max. working pressure: 700 bar




FEATURES

- Unique foot pumps are characterized by their the exquisite design durability and stability.
- Foot-operated pump and release pedal provide the for operating in different working conditions.
- Both Single-and Dual-speed in forging steel construction are available.
- Foot pedal with spring return is convenience and easy to use.
- Internal overload valve prevents pump from being used beyond its rated capacity.

Hoses & Adaptors

Page 71-77

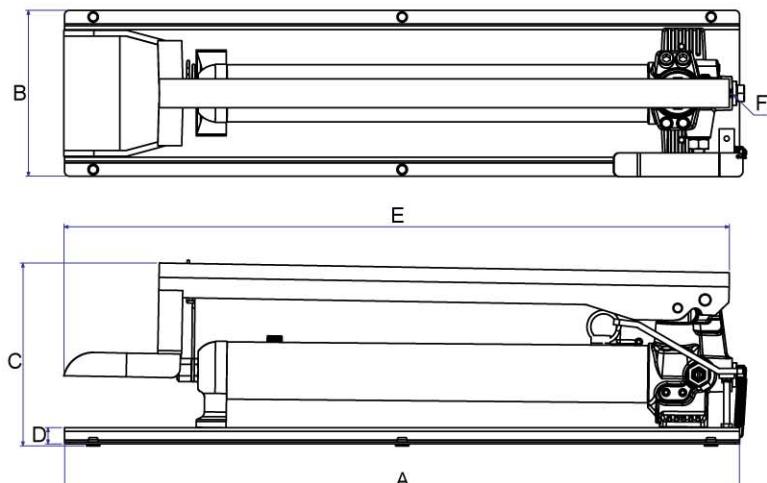

Manifolds & Control Valves

Page 71-77



Model No.	Pressure Rating (bar)		Usable Oil Capacity (c.c.)	Oil Volume Per Stroke (c.c.)		A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Oil Port Thread F	Weight (kgs)
	1st Stage	2nd Stage		1st Stage	2nd Stage							
FHA350	700		350	3.1		474	174	192	17	461	3/8 NPT	8.4
FHA600	700		600	3.1		660	174	192	17	647	3/8 NPT	10.3
FHA700	700		700	3.1		708	174	192	17	695	3/8 NPT	10.7
FHB350	13.8	700	350	13.0	2.8	474	174	192	17	461	3/8 NPT	8.5
FHB600	13.8	700	600	13.0	2.8	660	174	192	17	647	3/8 NPT	10.8
FHB700	13.8	700	700	13.0	2.8	708	174	192	17	695	3/8 NPT	11.1

AIR HYDRAULIC FOOT PUMP

POWERAM
HYDRAULIC TOOLS

MODEL: AP921

Single acting model


Max. working pressure: 700 bar



AP921

FEATURES

- Air-power hydraulic pump is designed for using with single-acting cylinders and tools.
- Rugged construction that most components are made of Aluminum alloy and built for long service life, easy operation and portability.
- Automatic overload relief valve setting as 10,000 psi protects components in hydraulic system and ensure work safety.
- New Inlet & Outlet design features low exhausting air volume, quiet effect and can be operated in all directions.
- Oil capacity can be modified according to your specific application.

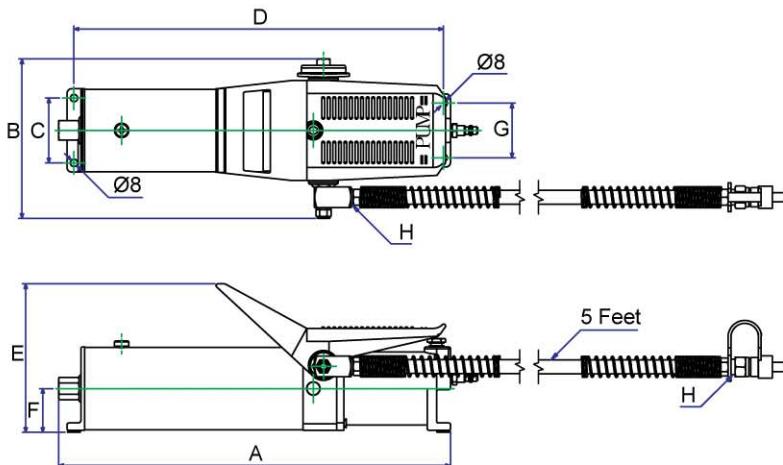

Model No.	Acting	Max. Pressure Output (psi)	Valve		Oil Del. (c.c./min. @)*			
			Type	Function	0(psi)	100(psi)	5000(psi)	10000(psi)
AP921	Single	10,000	—	Advance	700	—	—	100
AP922	Single	10,000	—	Advance	700	—	—	100

Model No.	Input Air Pressure (kg)	Reservoir Capacity (c.c.)	Usable Oil Capacity (c.c.)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	Weight (kg)
AP921	7-10	850	750	423	170	70	399	160	47	59	1/4" NPT	5.4
AP922	7-10	850	750	423	170	70	399	160	47	59	3/8" NPT	5.4

AIR HYDRAULIC FOOT PUMP



POWERRAM
HYDRAULIC TOOLS

MODEL: AP1600 SERIES


Single & Double acting models
Max. working pressure: 700 bar



AP1600D

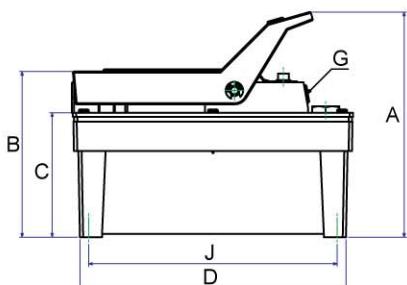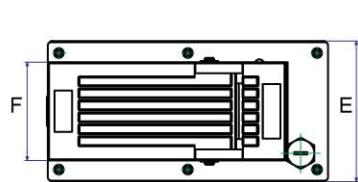

AP1600S

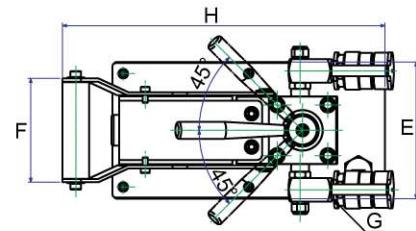

AP1600D

FEATURES

- Air-power hydraulic pump is designed for using with single-acting cylinders and tools.
- Rugged construction and most components are made of Aluminum alloy and built for long service life, easy operation and portability.
- Automatic overload relief valve setting as 10,000 psi protects components in hydraulic system and ensure work safety.
- New Inlet & Outlet design features low exhausting air volume, quiet effect and can be operated in all directions.
- Oil capacity can be modified according to your specific application.

Hoses & Adaptors

Page 71-77



Manifolds & Control Valves

Page 71-77



Model No.	Acting	Max. Pressure Output (psi)	Valve		Oil Del. (c.c./min. @)*			
			Type	Function	0(psi)	100(psi)	5000(psi)	10000(psi)
AP1600S	Single	10,000	---	Advance	1250	---	---	195
AP1600D	Double	10,000	3 Position / 4 Way	Advance/ Hold/ Retract	1250	---	---	195

Model No.	Input Air Pressure (kg)	Reservoir Capacity (c.c.)	Usable Oil Capacity (c.c.)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	J (mm)	Weight (kg)
AP1600S	7-10	1600	1300	207	152	114	244	129	90	3/8"-NPT	—	228	7.3
AP1600D	7-10	1600	1300	207	152	114	244	129	98	3/8"-NPT	304	228	9.3

AIR HYDRAULIC FOOT PUMP


POWERRAM
HYDRAULIC TOOLS

MODEL: AP3000 SERIES

Single & Double acting models
Max. working pressure: 700 bar



AP3000S

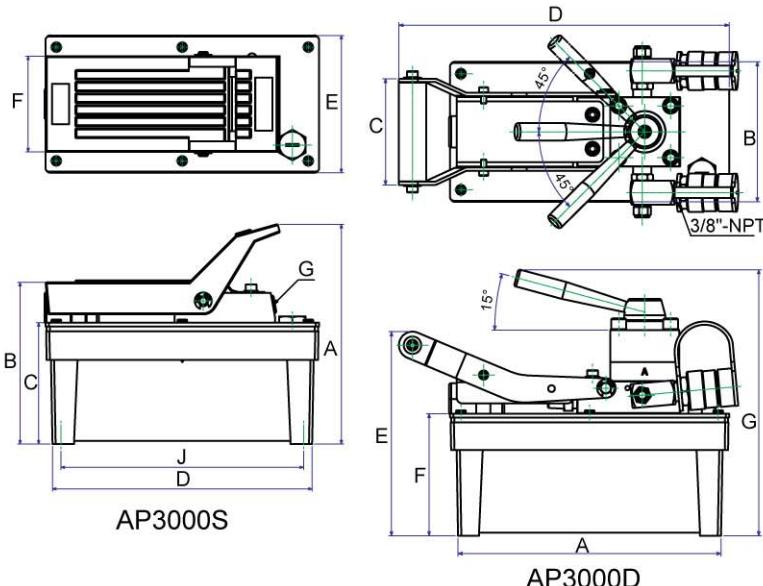

FEATURES

- Air-power hydraulic pump is designed for using with single-acting cylinders and tools.
- Rugged construction and most components are made of Aluminum alloy and built for long service life, easy operation and portability.
- Automatic overload relief valve setting as 10,000 psi protects components in hydraulic system and ensure work safety.
- New Inlet & Outlet design features low exhausting air volume, quiet effect and can be operated in all directions.
- Oil capacity can be modified according to your specific application.

Hoses & Adaptors

Page 71-77



Manifolds & Control Valves

Page 71-77



Model No.	Acting	Max. Pressure Output (psi)	Valve		Oil Del. (c.c./min. @)*			
			Type	Function	0(psi)	100(psi)	5000(psi)	10000(psi)
AP3000S	Single	10,000	---	Advance	1250	---	---	195
AP3000D	Double	10,000	3 Position / 4 Way	Advance/ Hold/ Retract	1250	---	---	195

Model No.	Input Air Pressure (kg)	Reservoir Capacity (c.c.)	Usable Oil Capacity (c.c.)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	J (mm)	Weight (kg)
AP3000S	7-10	3000	2500	247	190	114	309	160	90	3/8"-NPT	—	289	9.1
AP3000D	7-10	3000	2500	247	190	114	309	160	98	3/8"-NPT	343	289	12.0

AIR HYDRAULIC FOOT PUMP


POWERAM
HYDRAULIC TOOLS



AP8000D

MODEL: AP8000 SERIES

Single & Double acting models
Max. working pressure: 700 bar

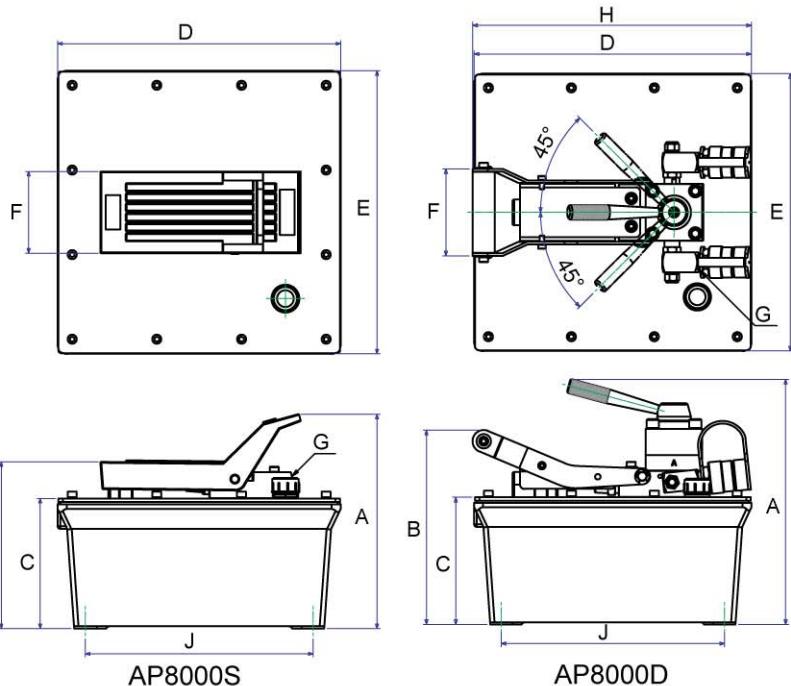

FEATURES

- Air-power hydraulic pump is designed for using with single-acting cylinders and tools.
- Rugged construction and most components are made of Aluminum alloy and built for long service life, easy operation and portability.
- Automatic overload relief valve setting as 10,000 psi protects components in hydraulic system and ensure work safety.
- New Inlet & Outlet design features low exhausting air volume, quiet effect and can be operated in all directions.
- Oil capacity can be modified according to your specific application.

Hoses & Adaptors Page 71-77



Manifolds & Control Valves Page 71-77



Model No.	Acting	Max. Pressure Output (psi)	Valve		Oil Del. (c.c./min. @)*			
			Type	Function	0(psi)	100(psi)	5000(psi)	10000(psi)
AP8000S	Single	10,000	---	Advance	1250	---	---	195
AP8000D	Double	10,000	3 Position / 4 Way	Advance/ Hold/ Retract	1250	---	---	195

Model No.	Input Air Pressure (kg)	Reservoir Capacity (c.c.)	Usable Oil Capacity (c.c.)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	J (mm)	Weight (kg)
AP8000S	7-10	8000	7200	236	184	143	311.6	311.6	90	3/8"-NPT	—	251	19.1
AP8000D	7-10	8000	7200	276	218	143	311.6	311.6	98	3/8"-NPT	313	251	21.5

AIR HYDRAULIC PUMP

POWERRAM
HYDRAULIC TOOLS





MODEL: AP13 SERIES

Single & Double acting models
Max. working pressure: 700 BAR

FEATURES

- Dual-speed operation for fast speed cylinder advance.
- 3L durable aluminum reservoir design.
- Air motor capable of starting under full load.
- Automatic over-load relief valve protects components of the hydraulic systems and ensures safe operation.

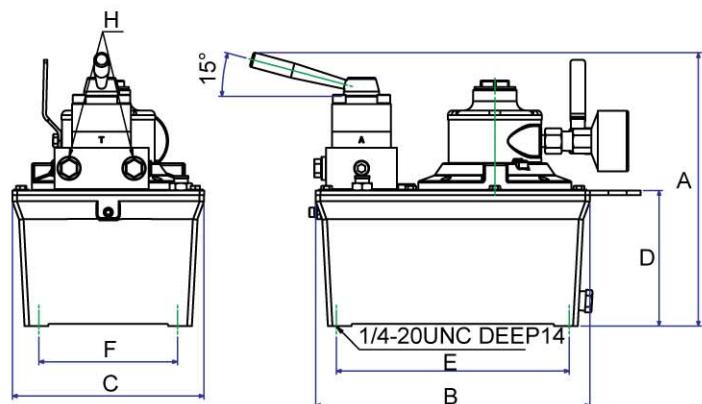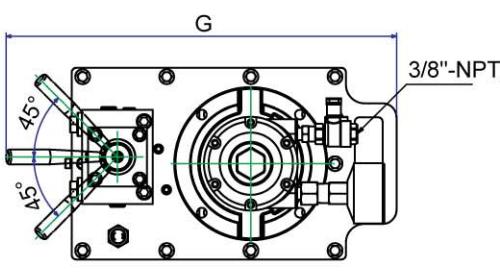

Model No.	Acting	Max. Pressure Output (psi)	Valve		Oil Del. (c.c./min. @)*			
			Type	Function	0(psi)	100(psi)	5000(psi)	10000(psi)
AP13S	Single	10,000	2 Position / 2 Way	Advance /Retract	4000	2800	330	280
AP13D	Double	10,000	3 Position / 4 Way	Advance/ Hold/ Retract	4000	2800	330	280

* Actual Flow will vary with field conditions.

* Holds pressure in advance position when valve motor is shut off.

Pump will build pressure when motor is shut off, oil returns to reservoir.

Model No.	Reservoir Capacity (c.c.)	Usable Oil Capacity (c.c.)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	Weight (kg)
AP13S	3000	2400	287	295.5	206.5	146.2	251	149.4	350	3/8"-NPT	18.7
AP13D	3000	2400	295	295.5	206.5	146.2	251	149.4	421	3/8"-NPT	19.2

* The weight is excluding the hydraulic oil.

AIR HYDRAULIC PUMP

POWERAM
HYDRAULIC TOOLS






MODEL: AP18 SERIES

Single & Double acting models
Max. working pressure: 700 BAR

FEATURES

- Dual-speed operation for fast speed cylinder advance.
- 8L durable aluminum reservoir design.
- Air motor capable of starting under full load.
- Automatic over-load relief valve protects components of the hydraulic systems and ensures safe operation.

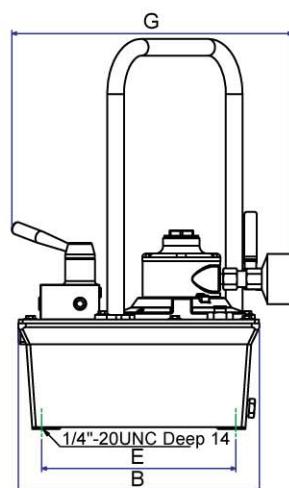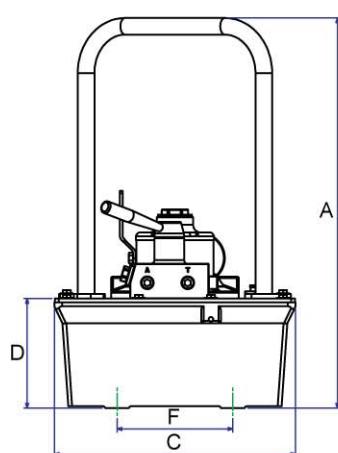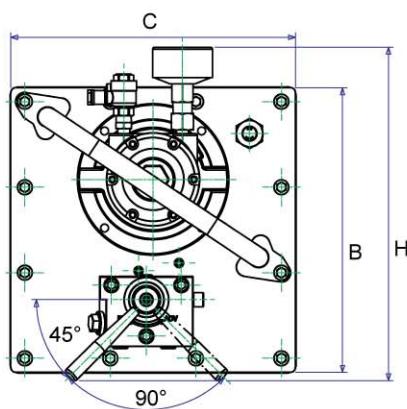

Model No.	Acting	Max. Pressure Output (psi)	Valve		Oil Del. (c.c./min. @)*			
			Type	Function	0(psi)	100(psi)	5000(psi)	10000(psi)
AP18S	Single	10,000	2 Position / 2 Way	Advance /Retract	4000	2800	330	280
AP18D	Double	10,000	3 Position / 4 Way	Advance/ Hold/ Retract	4000	2800	330	280

* Actual Flow will vary with field conditions.

* Holds pressure in advance position when valve motor is shut off.

Pump will build pressure when motor is shut off, oil returns to reservoir.

Model No.	Reservoir Capacity (c.c.)	Usable Oil Capacity (c.c.)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	Weight (kg)
AP18S	8000	7200	504	312	312	141.5	251	149.4	363	3/8"-NPT	20.0
AP18D	8000	7200	504	312	312	141.5	251	149.4	408	3/8"-NPT	20.5


* The weight is excluding the hydraulic oil.




MODEL: EP13 SERIES

ELECTRIC PUMPS, 3 LITER,
700 BAR/10,000psi

EP13



MODEL:EP13S

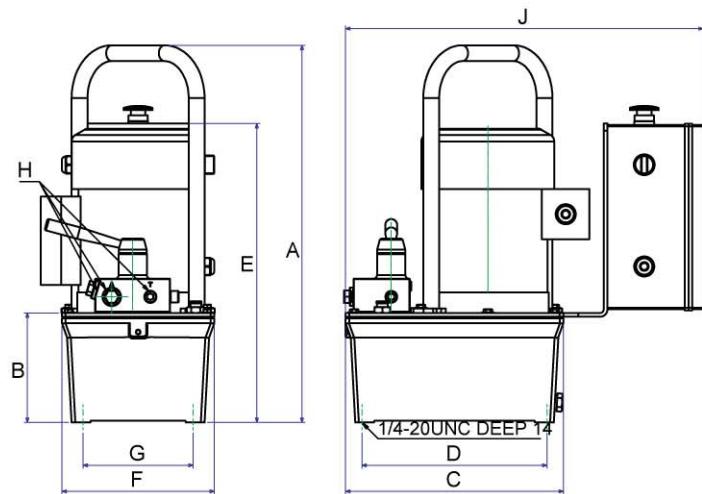

FEATURES

- Original pumps are built with 1/2 HP, 220V, 50/60Hz, Single phases universal brushless motor.
- Internal relief valve (700 bars) protects the components and work safety.
- Pumps are included with 24V, 3 meters remote control cord.
- Quiet pumps comply OSHA noise limitation (80dBA at 700bar).
- EP13D specially designed for double-acting cylinders without the need for additional control valve and adapters.
- Conform to CE standards.
- Both models are available with Solenoid Valve version.**

Model No.	Acting	RPM 50/60 Hz	Reservoir Capacity (c.c.)	Usable Oil Capacity (c.c.)	Motor	Max.Pressure OutPut (psi)	Valve		Oil Del.(c.c./min.)*(60Hz)			
							Type	Function	0(psi)	100(psi)	5000(psi)	10000(psi)
EP13S	Single	2860 / 3450	3,000	2,400	0.45 KW 110V / 220V 50 / 60 Hz Single Phase	10,000	2 Position / 2 Way	Hold /Retract	4,000	2,800	330	280
EP13SS*												
EP13D	Double	2860 / 3450	3,000	2,400		10,000	3 Position / 4 Way	Adv./Hold /Retract	4,000	2,800	330	280
EP13DS*												

Model No.	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H	J (mm)	Weight (kg)
EP13 Series	511.5	148.5	295.5	251	406	206.5	149.4	3/8"-NPT	485	25.8


* Solenoid version * * Weight is excluding the hydraulic oil



MODEL: EP18 SERIES

ELECTRIC PUMPS, 8 LITER,
700 BAR/10,000psi


EP18



FEATURES

- Original pumps are built with 1/2 HP, 220V, 50/60Hz, Single phases universal brushless motor.
- Internal relief valve (700 bars) protects the components and work safety.
- Pumps are included with 24V, 3 meters remote control cord.
- Quiet pumps comply OSHA noise limitation (80dBA at 700bar).
- EP18D specially designed for double-acting cylinders without the need for additional control valve and adapters.
- Conform to CE standards.
- Both models are available with Solenoid Valve version.

MODEL:EP18D

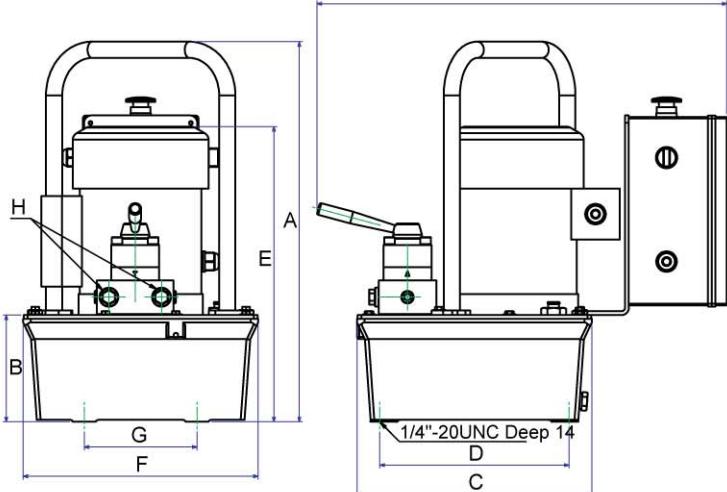

Model No.	Acting	RPM 50/60 Hz	Reservoir Capacity (c.c.)	Usable Oil Capacity (c.c.)	Motor	Max.Pressure OutPut (psi)	Valve		Oil Del.(c.c./min. @)*(60Hz)			
							Type	Function	0(psi)	100 psi	5000(psi)	10000(psi)
EP18S	Single	2860 / 3450	8,000	7,200	0.45 KW 110V / 220V 50 / 60 Hz	10,000	2 Position / 2 Way	Hold /Retract	4,000	2,800	330	280
EP18SS*												
EP18D	Double	2860 / 3450	8,000	7,200	Single Phase	10,000	3 Position / 4 Way	Adv./Hold /Retract	4,000	2,800	330	280
EP18DS*												


Model No.	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H	J (mm)	Weight (kg)
EP18 Series	504	141.5	311.6	251	391.5	311.6	149.4	3/8"-NPT	543.5	31.7

* Solenoid version * * Weight is excluding the hydraulic oil

MODEL: EP211 SERIES
ELECTRIC PUMPS, 11 LITER,
700 BAR/10,000psi




EP211



FEATURES

- Original pumps are built with 1 1/2 HP, 220V, 50/60Hz, Single phases universal brushless motor.
- Internal relief valve (700 bars) protects the components and work safety.
- Pumps are included with 24V, 3 meters remote control cord.
- Quiet pumps comply OSHA noise limitation (80dBA at 700bar).
- EP211D specially designed for double-acting cylinders without the need for additional control valve and adapters.
- Conform to CE standards.
- Both models are available with Solenoid Valve version.**

MODEL:EP211S

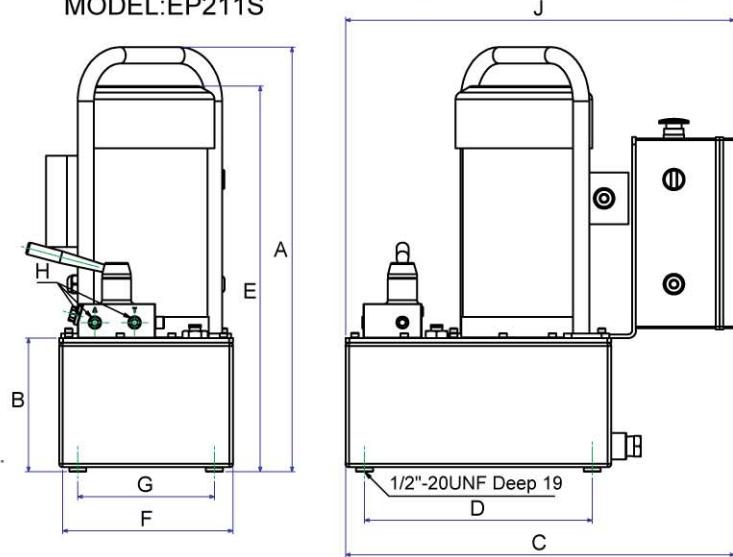

Model No.	Acting	RPM 50/60 Hz	Reservoir Capacity (c.c.)	Usable Oil Capacity (c.c.)	Motor	Max.Pressure OutPut (psi)	Valve		Oil Del.(c.c./min.)*(60Hz)			
							Type	Function	0(psi)	100(psi)	5000(psi)	10000(psi)
EP211S	Single	2860 / 3450	11,000	9,500	1.12 KW 110V / 220V 50 / 60 Hz Single Phase	10,000	2 Position / 2 Way	Hold /Retract	8,200	7,400	840	750
EP211SS*												
EP211D	Double	2860 / 3450	11,000	9,500		10,000	3 Position / 4 Way	Adv./Hold /Retract	8,200	7,400	840	750
EP211DS*												

Model No.	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H	J (mm)	Weight (kg)
EP211 Series	559	176	515.5	300	391.5	224.4	180	3/8"-NPT	515.5	38.9


* Solenoid version * * Weight is excluding the hydraulic oil



EP320D

MODEL: EP320 SERIES
ELECTRIC PUMPS, 1.48KW, 20 LITER
700 BAR/10,000psi


EP320



FEATURES

- Original pumps are built with 1.48KW, 220/380V, 50/60Hz, 3 phases universal brushless motor.
- Internal relief valve (700 bars) protects the components and work safety.
- Pumps are included with 24V, 3 meters remote control cord.
- Quiet pumps comply OSHA noise limitation (80dBA at 700bar).
- EP320D specially designed for double-acting cylinders without the need for additional control valve and adapters.
- Conform to CE standards.
- Both models are available with Solenoid Valve version.

MODEL:EP320S

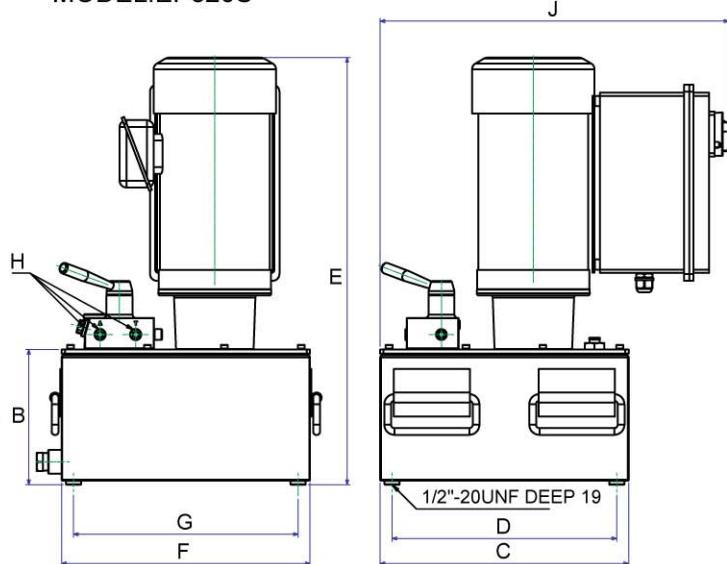

Model No.	Acting	RPM 50/60 Hz	Reservoir Capacity (c.c.)	Usable Oil Capacity (c.c.)	Motor	Max.Pressure OutPut (psi)	Valve		Oil Del.(c.c./min.)*(60Hz)			
							Type	Function	100(psi)	1000(psi)	5000(psi)	10000(psi)
EP320S	Single	1435 / 1735	20,000	18,000	1.48 KW 220V / 380V 50 / 60 Hz 3 Phase	10,000	2 Position / 2 Way	Hold /Retract	9,500	1,020	980	900
EP320SS*												
EP320D	Double	1435 / 1735	20,000	18,000		10,000	3 Position / 4 Way	Adv./Hold /Retract	9,500	1,020	980	900
EP320DS*												

Model No.	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H	J (mm)	Weight (kg)
EP320 Series	—	198.5	365	330	627.5	365	330	3/8"-NPT	512	65

* Solenoid version * * Weight is excluding the hydraulic oil




EP420DS


MODEL: EP420 SERIES

ELECTRIC PUMPS, 2.24KW, 20 LITER
700 BAR/10,000psi

EP420

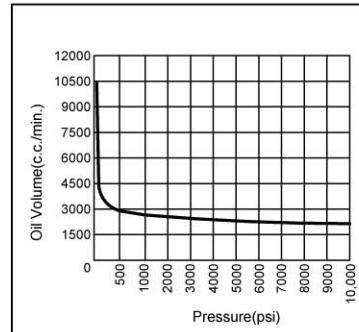

MODEL: EP420S

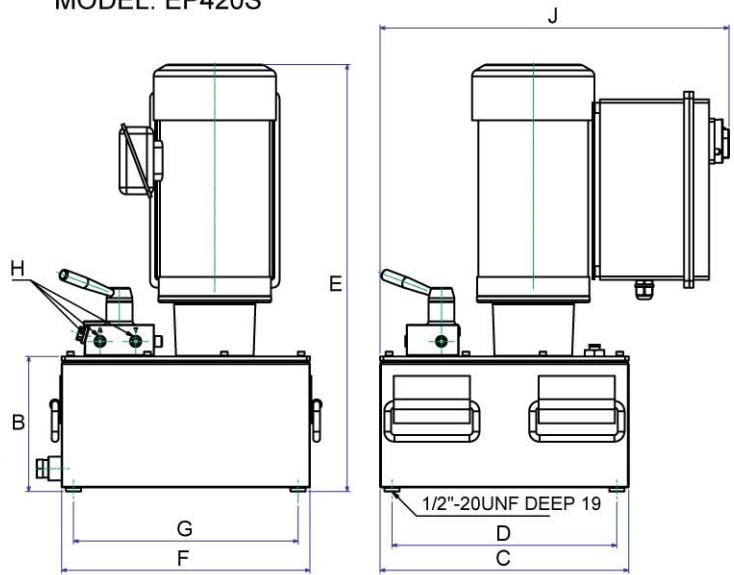

FEATURES

- Original pumps are built with 2.24KW, 220/380V, 50/60Hz, 3 phases universal brushless motor.
- Internal relief valve (700 bars) protects the components and work safety.
- Pumps are included with 24V, 3 meters remote control cord.
- Quiet pumps comply OSHA noise limitation (80dBA at 700bar).
- EP420D specially designed for double-acting cylinders without the need for additional control valve and adapters.
- Conform to CE standards.
- Both models are available with Solenoid Valve version.

Model No.	Acting	RPM 50/60 Hz	Reservoir Capacity (c.c.)	Usable Oil Capacity (c.c.)	Motor	Max. Pressure OutPut (psi)	Valve		Oil Del.(c.c./min. @)*(60Hz)			
							Type	Function	100(psi)	1000(psi)	5000(psi)	10000(psi)
EP420S	Single	1435 / 1735	20,000	18,000	2.24 KW 220V / 380V 50/60 Hz 3 Phase	10,000	2 Position / 2 Way	Hold /Retract	9,500	2,450	1,950	1,800
EP420SS*												
EP420D	Double	1435 / 1735	20,000	18,000		10,000	3 Position / 4 Way	Adv./Hold /Retract	9,500	2,450	1,950	1,800
EP420DS*												

Model No.	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H	J (mm)	Weight (kg)
EP420 Series	—	198.5	365	330	627.5	365	330	3/8"-NPT	512	65

* Solenoid version * * Weight is excluding the hydraulic oil

ELECTRIC PUMPS

POWERAM
HYDRAULIC TOOLS





EP5100D



EP5100DS


MODEL: EP5100
USABLE OIL CAP. :80L
OIL CAPACITY: 100L

EP5100

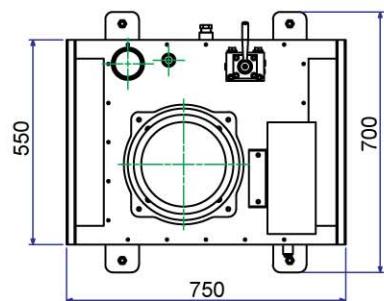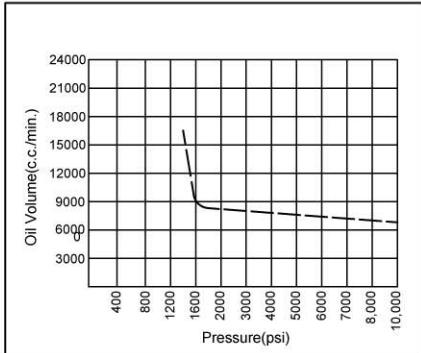

FEATURES

- Dual-speed high output pump delivers up to 16 l/min of oil.
- Low noise level of 73 - 80 dBA.
- Pump prewired at factory with 7.46kW, 380V, 50 Hz, 3 phase universal brushless motor.
- 24 volt control circuits on units with remote controls for user/operator safety.
- 3 phase motor with thermal overload protection and has all the electric components necessary to operate the pump.
- Power switch are 24 volts. EP5100D has a 4-way/3-position manual valve. EP5100DS has a 4-way/3-position solenoid valve with a 24 volt remote switch.
- 100L (80L usable) reservoir has a low oil level sight gauge.

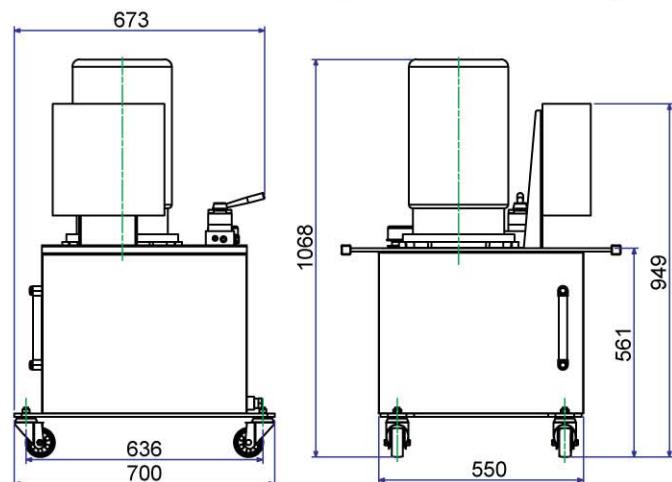


10 HP Electric Pumps - 700 bar

Model No.	Reservoir Capacity (l)	RPM	Motor	Max. Pressure Output (psi)	Amp Draw at 10000 psi	Oil Del. (l/min at..)			
						100(psi)	1000(psi)	5000(psi)	10000(psi)
EP5100D	100	1437	7.46kW 380V 50 Hz, 3 phase	10,000	6	16	14	6	5.6
EP5100DS									

Model No.	RPM	Reservoir Capacity (l)	Motor	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Weight W/O Oil (kg)
EP5100D	1437	100	7.46kW 380V 50 Hz, 3 phase	1068	700	700	561	550	636	232
EP5100DS										241

MECHANICAL EASY PULLERS (2,3 WAY)

POWERM
HYDRAULIC TOOLS

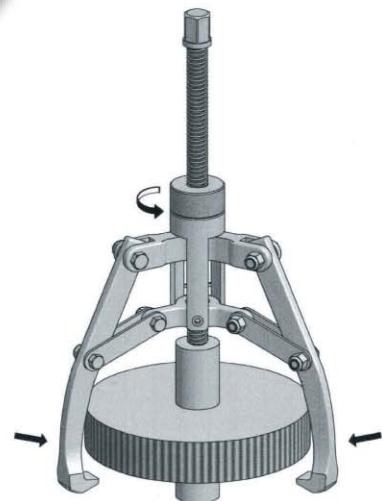

SIMPLE AND EASY PULLING JOB

The most simple and efficient design, the screw-Operated jaws bring the users to position the puller on the part quickly and precisely with one person operating only.

USER-FRIENDLY


- 3 or 2 fixed jaws for easy positioning and self-centering.
- Available in six sizes with a maximum pulling force from 2 Ton to 10 Ton.

SAFE

- Self-centering function prevents the damage to the shaft and work piece being pulled.

SAVING COST

- Easy operating by one person which save time and work efficiently
- The first 2 or 3 way mechanical puller in the world, also a good choice to save cost by one price for two pullers.

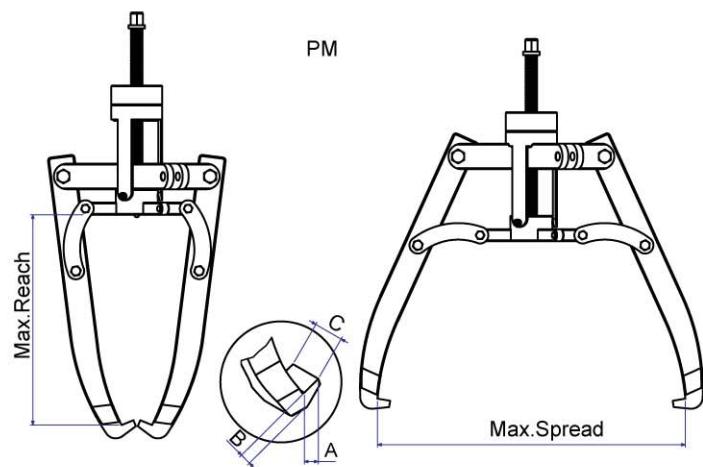

SPECIFICATIONS

Capacity	Model No.	Jaws	Reach (Max. mm)	Spread (Max. mm)	Shaft Dim.	Jaw Tip (mm)			Weight (kg)
						A	B	C	
2 Ton	PM50	3	80	120	$\varnothing 5/8'' \times 8T$	8	6	15	1.3
2 Ton	PM52	2	80	120	$\varnothing 5/8'' \times 8T$	8	6	15	0.9
5 Ton	PM100	3	160	250	$\varnothing 3/4'' \times 8T$	11	10	25	3.7
5 Ton	PM102	2	160	250	$\varnothing 3/4'' \times 8T$	11	10	25	3.1
10 Ton	PM150	3	230	380	$\varnothing 7/8'' \times 6T$	14	10	29	8.8
10 Ton	PM152	2	230	380	$\varnothing 7/8'' \times 6T$	14	10	29	6.7

Patented in USA, Germany, S. Korea, Taiwan, P.R.C.....etc.

MANUAL EASY PULLERS - 2/3 WAY

POWERRAM
HYDRAULIC TOOLS



SIMPLE AND EASY PULLING JOB

The most simple and efficient design, Screw-Operated Jaws bring the users to position the puller on the part quickly and correctly with just one person operating only.

USER-FRIENDLY


- 3 and/or 2 fixed jaws for easy positioning and self-centering.
- Available in six sizes with a maximum pulling force from 2 Tons to 12 Tons.

SAFE

- Self-positioning centring prevent the damage to the shaft as well.

SAVING COST

- Conveniently positioning, efficiently pulling help to save manpower and operating time.
- The first 2 / 3 way manual easy puller in the world which brings users the two options in one model as the best choice to save the cost.

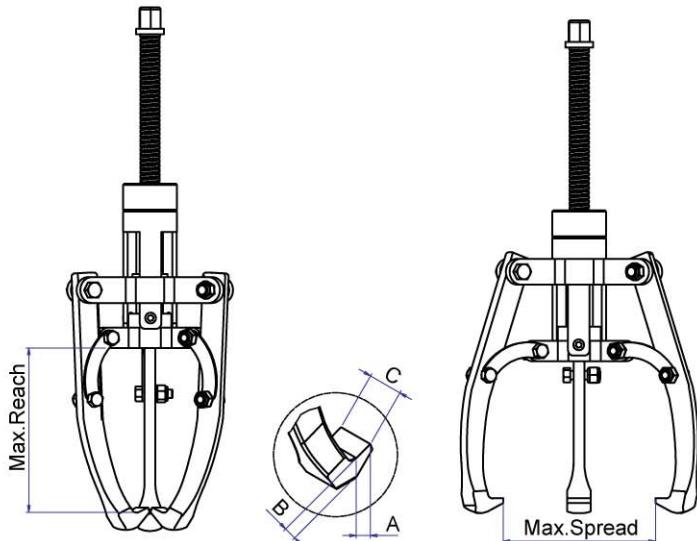

SPECIFICATIONS

Capacity	Model No.	Reach (Max. mm)	Spread (Max. mm)	Shaft Dimension		Jaw Tip (mm)			Weight (kgs)
				Thread	Length (mm)	A	B	C	
2 Ton	PM55	80	120	Ø5/8"x11T	24	8	6	15	1.6
3 Ton	PM85	120	140	Ø5/8"x11T	28	6	7	15	2.3
5 Ton	PM105	160	270	Ø3/4"x11T	34	11	10	25	4.3
8 Ton	PM125	210	300	Ø3/4"x11T	39	13	14	27	6.1
10 Ton	PM155	250	380	Ø7/8"x11T	47	14	10	29	9.6
12 Ton	PM175	250	440	Ø7/8"x11T	47	14	10	29	11.2

Patented in USA, Germany, S. Korea, Taiwan, P.R.C.....etc.

HYDRAULIC PULLERS

POWERAM
HYDRAULIC TOOLS

MODEL:PM SERIES




FEATURES

- Exchangeable 2 or 3 arm combination puller is very practical and economical.
- 360° Rotary Socket.
- Self-contained hydraulic pump and puller body with integral safety valve.
- Spring loaded live centering nut for easy job (removable).
- Four stages of foldable & removable handle saves the handle force during operation.
- Patented design of two stages stroking for PM2000 & PM3000, the first stage being as fast stroking for quickly connecting with object, and the second stage being as high hydraulic output for pulling job.
- The extension rods can be used for extra reach when necessary.

ACCESSORIES

Model No.	Part No.	Length of Long Arm (mm)	Max. Reach	Max Spread
PM400	C0948	295	222	300
PM600	C0949	335	260	363
PM800	C0950	395	308	445
PM1200	C0951	435	340	420
PM2000	C0960	555	428	540
PM3000	C0961	555	428	620

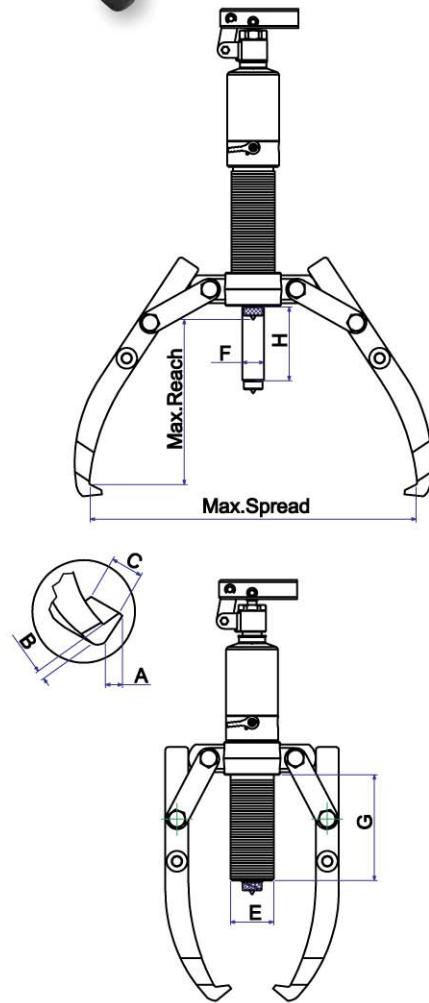

SPECIFICATIONS


Capacity	Model No.	Reach (Max. mm)	Spread (Max. mm)	Stroke (mm)	Pump Tip (mm)				Jaw Tip (mm)			Weight (kg)
					H	E	F	G	A	B	C	
4 Ton	PM400	185	255	60	42	22	84	11	6	22	4.5	
6 Ton	PM600	220	330	70	45	23	94	13	10	22	5.5	
8 Ton	PM800	230	350	85	50	25	122	11	10	25	6.5	
12 Ton	PM1200	270	375	85	60	28	118	14	10	29	8.0	
20 Ton	PM2000	360	520	111	80	40	160	20	27	33	22	
30 Ton	PM3000	360	550	111	98	50	155	20	27	38	32	

HYDRAULIC PULLERS - PACKAGE MODELS

POWERRAM
HYDRAULIC TOOLS




- One complete set with two kinds of puller for user's convenience.

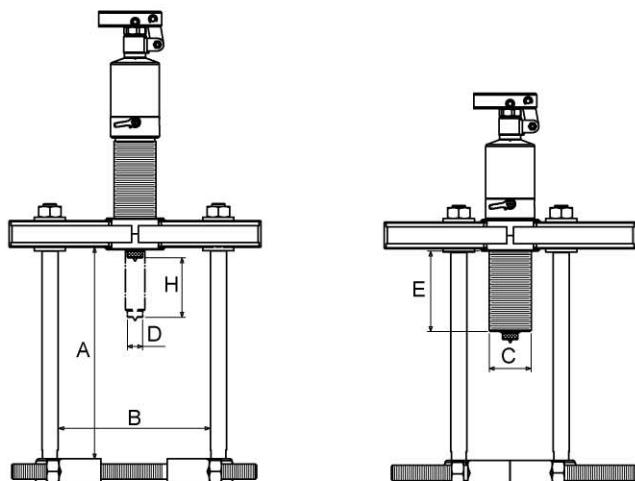

FEATURES

- Four stages of foldable & removable handle saves the handle force during operation.
- 360° Rotary Socket.
- Self-contained hydraulic pump and puller body with integral safety valve.
- Spring loaded live centering nut for easy job (removable).
- 2 jaws puller cross head with manganese-phosphate plated for rust proof and durability.
- Package including puller body, jaw assembly, cross bearing, extension bar and blow molded case for practical and safe works.

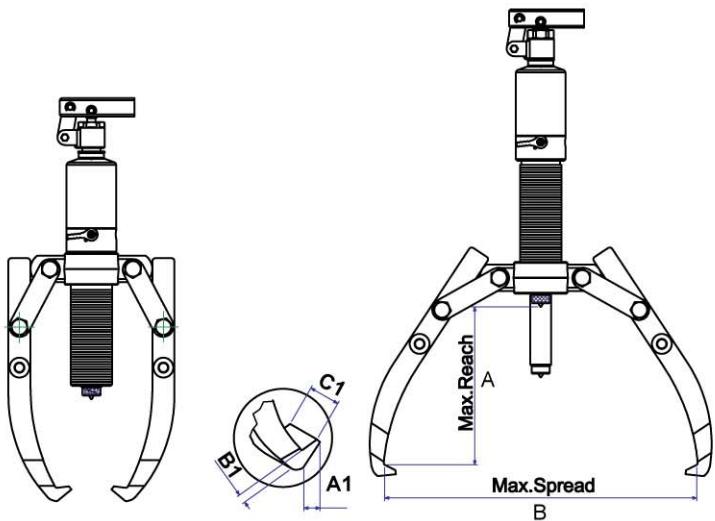

SPECIFICATIONS

Capacity	Model No.	Reach (Max. mm)		Stroke (mm)	Pump Tip (mm)			Jaw Tip (mm)			Weight (kg)
		A	B		C	D	E	A1	B1	C1	
4 Ton	PM420	185/224	255/145	60	42	22	84	11	6	22	4.5 / 8.5
6 Ton	PM620	220/255	330/220	70	45	23	90	13	10	22	5.5 / 11.5
8 Ton	PM820	230/255	350/230	85	50	25	122	11	10	25	6.5 / 12.6
12 Ton	PM1220	270/298	375/310	85	60	28	115	14	10	29	8.0 / 18.0

SEPARATE HYDRAULIC PULLERS

POWERAM
HYDRAULIC TOOLS

MODEL:PR SERIES




FEATURES

- Heat treated & chrome plated hydraulic cylinder rod provides linear force.
- Easily release valve.
- Spring loaded live centering nut for easy job (removable).
- 2/3 jaws combination puller cross head with manganous-phosphate plated for rust proof and durability.
- Heat treated forged alloy steel cross bolts & jaws with manganous-phosphate plated for rust proof and long life service.
- Suggested Hand Pumps:
4 ~ 12 Ton: PB600BG or AHP701BG
20 ~ 30 Ton: PB700BG or AHP702BG



ACCESSORIES

Model No.	Part No.	Length of Long Arm (mm)	Max. Reach	Max Spread
PR400	C0948	295	222	300
PR800	C0950	395	308	445
PR1200	C0951	435	340	420
PR2000	C0960	555	428	540
PR3000	C0961	555	428	620

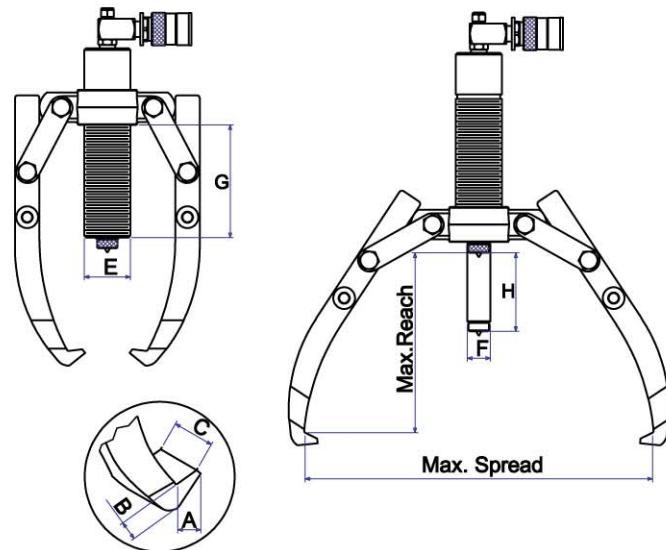

SPECIFICATIONS

Capacity	Model No.	Reach (Max. mm)	Spread (Max. mm)	Stroke (mm)	Pump Tip (mm)			Jaw Tip (mm)			Weight (kg)
					H	E	F	G	A	B	
4 Ton	PR400	185	255	60	42	22	84	11	6	22	5.8
8 Ton	PR800	230	350	85	50	25	122	11	10	25	8.2
12 Ton	PR1200	270	375	85	60	28	118	14	10	29	10.9
20 Ton	PR2000	360	520	111	80	40	161	20	27	33	23.7
30 Ton	PR3000	360	550	111	98	50	155	20	27	38	32.8

SEPARATE HYDRAULIC PULLERS - PACKAGE MODELS

POWERAM
HYDRAULIC TOOLS


MODEL: PR420 - PR1220



FEATURES

- Heat treated & chrome plated hydraulic cylinder rod provides linear force.
- Easily release valve.
- Spring loaded live centering nut for easy job (removable).
- 2 jaws puller cross head with manganous-phosphate plated for rust proof and durability.

- Heat treated,chrome plated & alloy steel stud for rust proof and free reach.
- Package including puller body, jaw assembly, cross bearing, extension bar and blow molded case for practical and safe works.
- Suggested Hand Pumps:
4 ~ 12 Ton: PB600BG or AHP701BG
20 ~ 30 Ton: PB700BG or AHP702BG

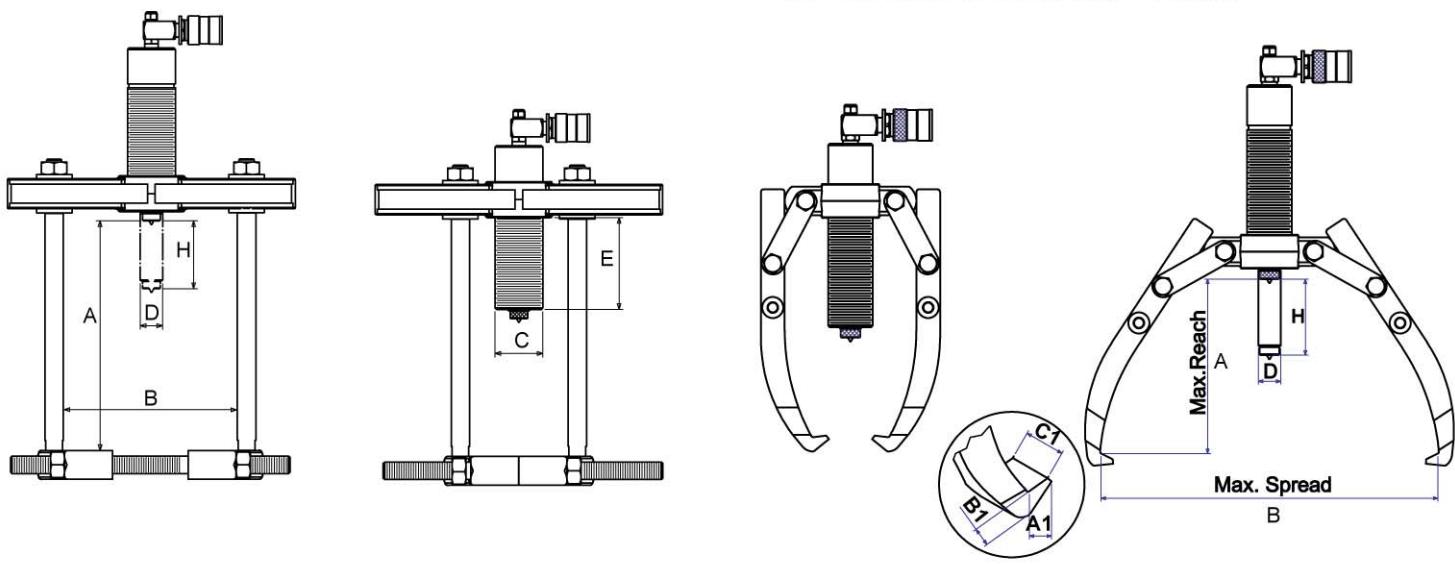

SPECIFICATIONS

Capacity	Model No.	Reach (Max. mm)		Stroke (mm)		Pump Tip (mm)			Jaw Tip (mm)			Weight (kg)
		A	B	H	C	D	E	A1	B1	C1		
4 Ton	PR420	185/224	255/145	60	42	22	84	11	6	22	4.5 / 8.5	
8 Ton	PR820	230/255	350/230	85	50	25	122	11	10	25	6.5 / 12.6	
12 Ton	PR1220	270/298	375/310	85	60	28	115	14	10	29	8.0 / 18.0	

HYDRAULIC EASY PULLERS


POWERRAM
HYDRAULIC TOOLS

The first 2/3 way Hydraulic Easy Puller in the world !




FEATURES

- Self-centering and fast-acting jaws are absolutely user-friendly for operating.
- 360° Rotary socket can be operated in all direction.
- The extension rods can be used for extra reach when necessary.
- The self-contained hydraulic pump provide easy job without the necessary of additaional cylinder, pump & hose.
- The integral safety valve can prevent the puller being overloaded.
- The convertible 2 / 3 way hydraulic easy puller provide the best and cost saving choice for the users.

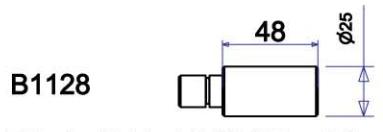


Extension Rod for 4, 6, 8 & 12 Tons Pullers

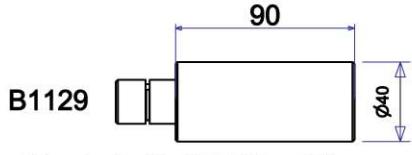

Extension Rod for 20 & 30 Tons Pullers

Puller Assembled
Package

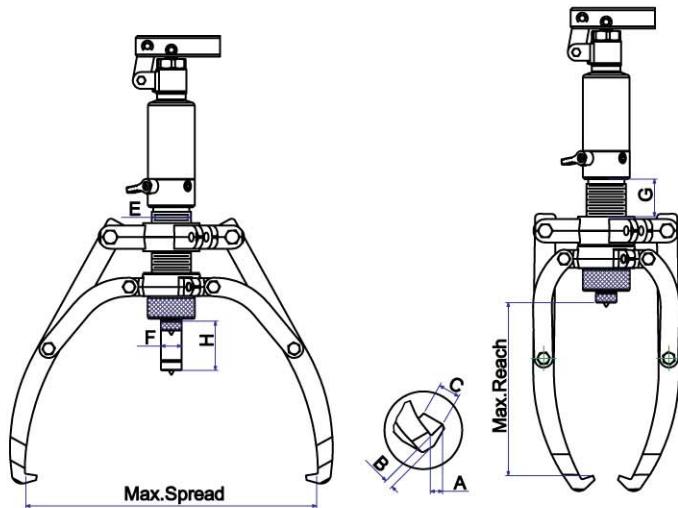

SPECIFICATIONS

Capacity	Model No.	Max Spread (mm)	Min Reach (mm)	Min Spread (mm)	Max Reach (mm)	Stroke (mm)	Pump Tip (mm)			Jaw Tip (mm)			Weight (kg)
							H	E	F	G	A	B	
4 Ton	PME400	315	150	43	190	60	42	22	40	13	10	22	8.0
6 Ton	PME600	390	185	45	230	70	45	23	50	13	10	22	9.8
8 Ton	PME800	460	225	95	280	85	50	25	70	13	13	27.5	11.7
12 Ton	PME1200	515	240	100	300	85	60	28	70	15	16.5	29	14.8
20 Ton	PME2000	520	250	110	325	111	80	40	62	18	20	33	25.7
30 Ton	PME3000	620	330	120	415	111	98	50	85	18	20	38	36.0

Patented in USA, Germany, Taiwan, P.R.C.....etc.

SEPARATE HYDRAULIC EASY PULLERS


POWERAM
HYDRAULIC TOOLS

MODEL:PRE SERIES




FEATURES


- Self-centering and fast-acting jaws are absolutely user-friendly for operating.
- 360° Rotary socket can be operated in all direction.
- The extension rods can be used for extra reach when necessary.
- The integral safety valve can prevent the puller being overloaded.
- The convertible 2 / 3 way hydraulic easy puller provide the best and cost saving choice for the users.
- Suggested Hand Pumps:
4 ~ 12 Ton: PB600BG or AHP701BG
20 ~ 30 Ton: PB700BG or AHP702BG



B1128 Extension Rod for 4, 6, 8 & 12 Tons Pullers

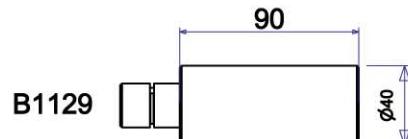

B1129 Extension Rod for 20 & 30 Tons Pullers

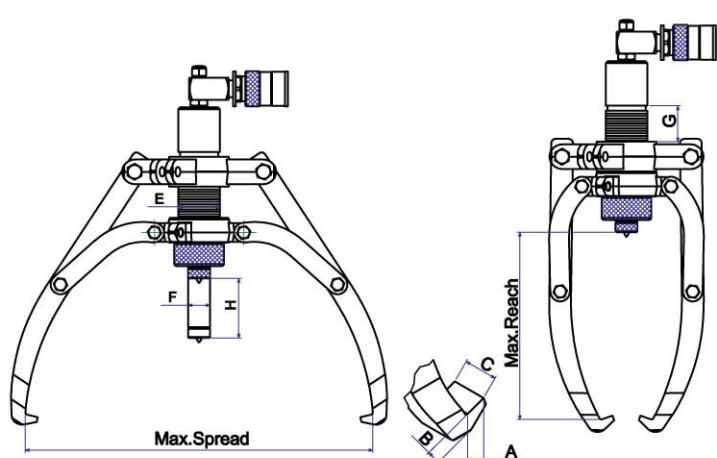

SPECIFICATIONS

Capacity	Model No.	Max Spread (mm)	Min Reach (mm)	Min Spread (mm)	Max Reach (mm)	Stroke (mm)	Pump Tip (mm)			Jaw Tip (mm)			Weight (kg)
							H	E	F	G	A	B	C
4 Ton	PRE400	315	150	43	190	60	42	22	40	13	10	22	7.4
8 Ton	PRE800	460	225	95	280	85	50	25	70	13	13	27.5	13.9
12 Ton	PRE1200	515	240	100	300	85	60	28	70	15	16.5	29	16.4
20 Ton	PRE2000	520	250	110	325	111	80	40	62	20	27	33	43.5
30 Ton	PRE3000	620	330	120	415	111	98	50	85	20	27	38	56.5

Patented in USA, Germany, Taiwan, P.R.C.....etc.

PUSH PULLER / THREE-IN-ONE

POWERRAM
HYDRAULIC TOOLS

The first Three-in-one push puller in the world !





PD12080

SIMPLE, EASY

The patented unique design provides the users to get the three-in-one tool for installing, outer pulling and inner pulling with the great convenience and safety.

The push puller is specially designed for having combined works on pushing and pulling. This creates one tool to provide the both of most even force for pushing and pulling with great convenience.

The pushing jaw heads on the inner ring of the bearing which prevents the force and/or heat from being transmitted through the outer ring and the rolling parts, minimizing the risk of bearing damaged.

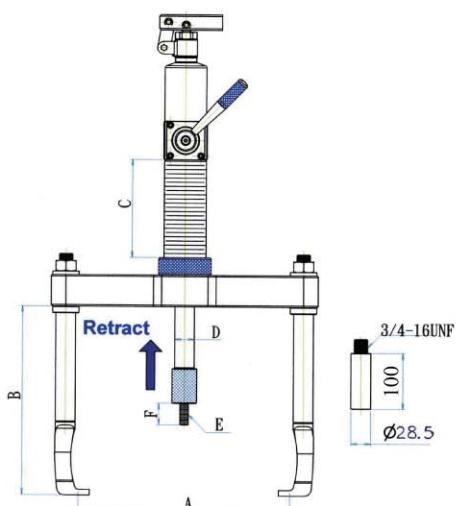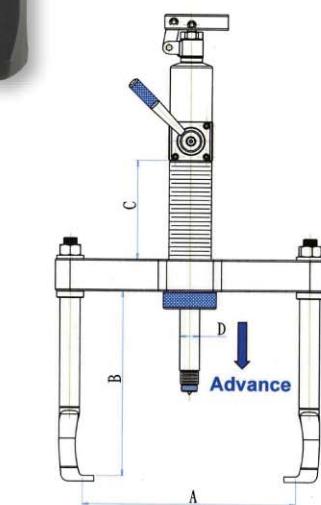

INNER PULLING



PUSHING



OUTER PULLING



MD6203




PUSH PULLER / THREE-IN-ONE

POWERRAM
HYDRAULIC TOOLS

The first Three-in-one push puller in the world !



PDR12080

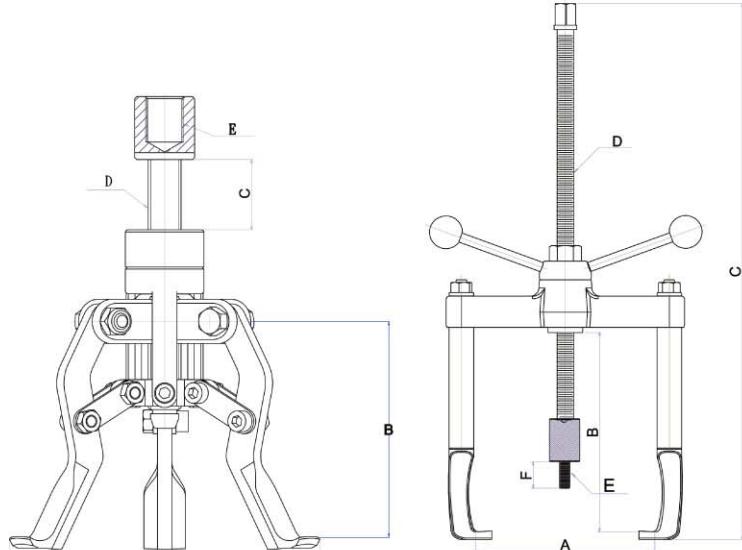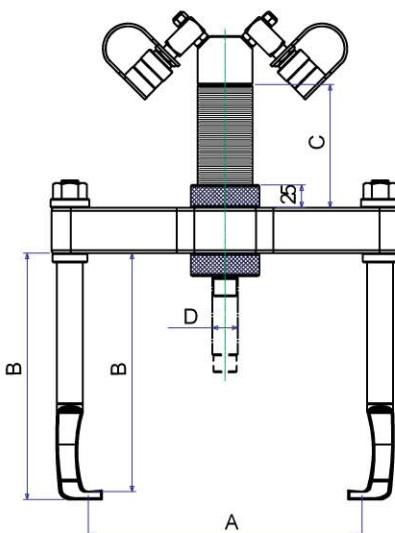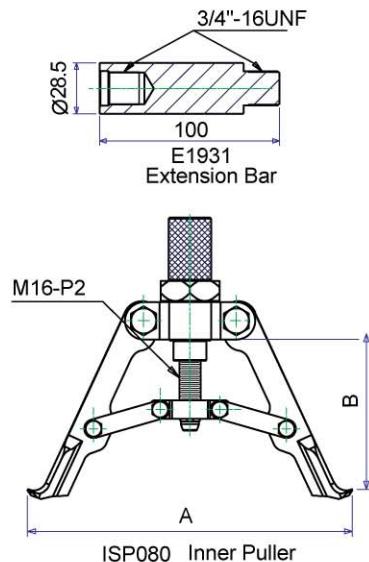

USER-FRIENDLY

- Unique & Patented double action pump body to provide the pushing and pulling force.
- Unique jaw design for installing and outer pulling without removing and changing.
- Three jaw structure provides the even and constant force whenever for installing, outer pulling and inner pulling.
- The extension bars can be used where necessary for reach.
- Self-centering design on inner puller provides the even force and prevent the jaws from sliding off during operating.

SAFE

- The built-in safety valve prevents the user being harmed and work object being damaged by rated pressure which can not be reset or adjusted.
- Most parts are forged SCM440 alloy steel, creating a durable and safe product.

COST SAVING

- The Three-in-One design reduces tool-reset time and duration of operation .
- This push puller is ideal for installing and dismantling a wide variety of press-fit parts, including bushings, wheels, bearings, gears and pulleys.

SPECIFICATIONS

Model No.	Operation	Output (Tons)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Weight (kgs)
PD12080	Installing	8	44-280	270	140	28	M12-P1.75	30	19.5
	Outer Pulling	12	85-300	260	140	28	---	---	---
	Inner Pulling	8	90-245	130-150	---	---	1"-12UNF	---	---
PDR12080	Installing	8	44-280	270	140	28	M12-P1.75	30	17.5
	Outer Pulling	12	85-300	260	140	28	---	---	---
	Inner Pulling	8	90-245	130-150	--	---	1"-12UNF	---	---
MD6203	Installing	8	70-206	240	720	3/4"-10UNC	M12-P1.75	30	10.5
	Outer Pulling	8	29-186	230	720	3/4"-10UNC	---	---	---
	Inner Pulling	8	52-150	130-150	34	5/8"-11UNC	3/4"-10UNC	---	---



TRI-SECTION PLATES

POWERRAM
HYDRAULIC TOOLS



USER-FRIENDLY & SAFE

- Unique & patented swivel design creates the max. spread.
- The tri-section construction provides the even force distribution, preventing bearing from locking and/or tilting on the shaft during dismantling.
- Suitable for combination usage with all three-armed hydraulic pullers.
- Available in a wide range, covering the most common shaft sizes.
- The firm grip behind inner and outer rings of bearing ensures the pulling force being transmitted through the moving parts and preventing the damaging of bearing.

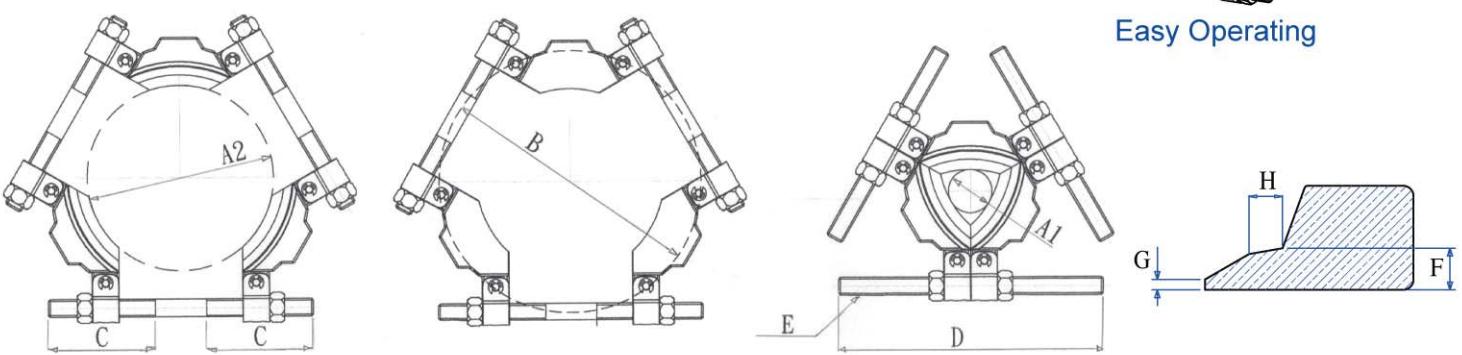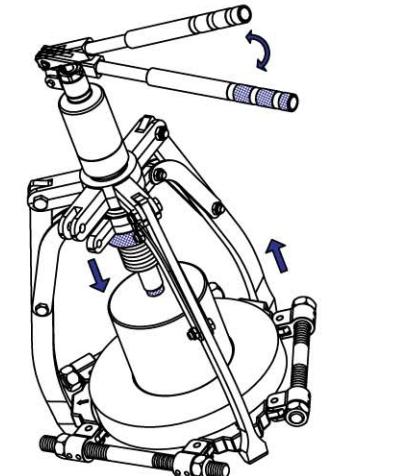

SPECIFICATIONS (mm)

Model No.	Available Shaft Dia.		Spread B(Max.)	C	D	E	F	G	H	Capacity (Ton)	Weight (kg)
	A1	A2									
ET3-160	26	160	216	105	240	5/8"-11UNC	8	2	6.5	6	3.5
ET3-210	50	210	280	117	285	7/8"-14UNF	10	2	9	8	5.5
ET3-340	90	340	460	175	430	11 1/4"-12UNF	14	2	8	20	18
ET3-495	140	495	660	235	610	13 1/4"-12UNF	20	2	12	30	45

TRI-SECTION PULLERS


POWERRAM
HYDRAULIC TOOLS



Steel Case - Package

FEATURES

- The set including Tri-section plate for convenient and safe pulling job.
- Wedge-shaped edge allows removal of the most hard-to-grip components.
- The firm grip behind bearing's inner & outer rings ensures the pulling force not to be transmitted through the rolling parts.
- The tri-section plates design creates the most even force distribution and the maximizing spread.

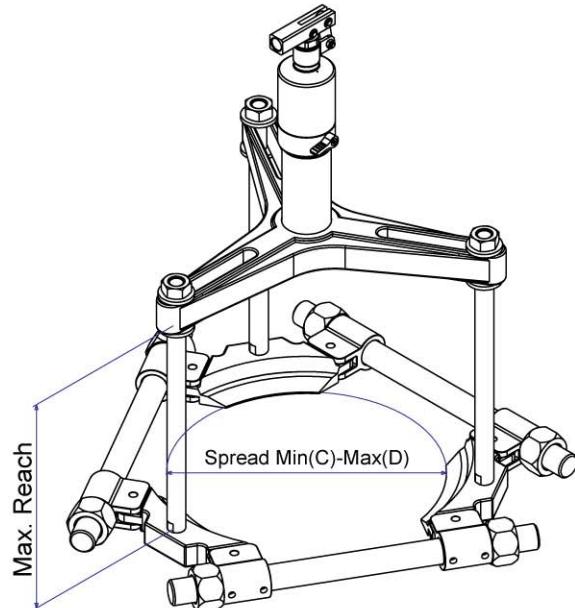

SPECIFICATIONS

Capacity	Model No.	Reach (Max. mm)	Spread (mm)		Optional Pump Body	Overall Width (mm)	Weight (kg)
			C (Min.)	D (Max.)			
4 Ton	P3412	211	30	160	PM401	240	20
6 Ton	P3612	243	50	210	PM601	285	30
8 Ton	P3812	243	50	270	PM801	460	34
12 Ton	P31212	284	90	340	PM1201	660	68

Universal Bearing Attachments


Cross Bearing Pullers

POWERRAM
HYDRAULIC TOOLS



FEATURES

- Forged of high strength steel alloy.
- Heat treated, Chrome plated for rust proof and durable life.
- Wedge-shaped edges allow removal of the most hard-to-grip components.
- Cross bearing pullers are easy to be applied on the most difficult parts for fast and efficient removal.

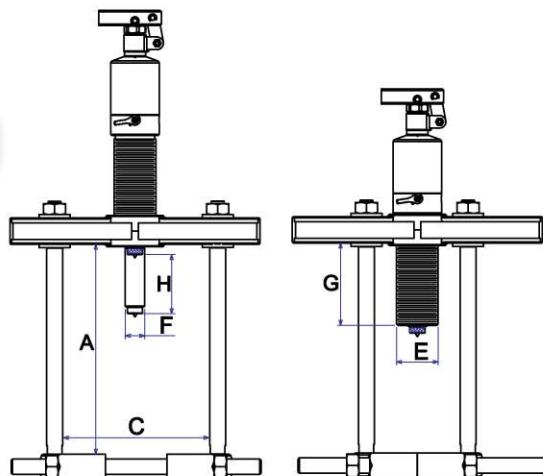

TECHNICAL DATA - Cross Bearing Pullers


Model No.	Capacity (Ton)	Reach (Max. mm) A	Spread (Max. mm) C	Stroke (mm) H	Pump Tip (mm)		
					E	F	G
PM410	4	224	145	60	42	22	84
PM610	6	255	220	70	45	23	90
PM810	8	255	230	85	50	25	122
PM1210	12	298	310	85	60	28	115

* Including the hydraulic pump body and bearing attachment.

TECHNICAL DATA - Accessory Set


Model No.	Capacity (Ton)	A (mm)	D(mm) Min-Max	C (mm)	CC (mm) Min-Max	Thread (inch)	Bearing Attachment	Weight (kgs)
P412	4	224	12 - 70	163	100 - 145	1/2"- 13UNC	YC9015	6.5
P612	6	255	28 - 150	260	115 - 220	5/8"- 11UNC	YC9025	10.5
P812	8	255	28 - 150	260	110 - 230	5/8"- 11UNC	YC9025	11.5
P1212	12	298	20 - 200	360	140 - 310	3/4"- 10UNC	YC9035	20.0

* Excluding the hydraulic pump body.



TECHNICAL DATA - Bearing Attachments

Model No.	D Min - Max (mm)	C (mm)	L (mm)	I (mm)	ØT (inch)	ØM (inch)	Weight (kgs)
YC9005	5-60	17	120	92	3/8-24UNF	3/8-16UNC	0.7
YC9010	15-60	20	135	130	1/2-20UNF	3/8-16UNC	1.5
YC9015	12-70	27	165	156	5/8-18UNF	1/2-12UNC	2.6
YC9025	28-150	33	275	207	3/4-16UNF	5/8-11UNC	5
YC9035	20-200	38.5	350	240	1-14UN	3/4-10UNC	10
YC9035A	20-200	38.5	350	240	1-14UN	1-14UN	11.0



50 TON EASY PULLER

POWERRAM
HYDRAULIC TOOLS



FEATURES

- Double acting cylinder for holding, opening and closing the jaws for safe and secure grip on job.
- The easy jaw operating system prevent puller jaws from sliding and/or springing off the work object always.
- Self-centering design keeps the arms slide inwards or outwards simultaneously.
- Electric Pump advances and retracts the pushing cylinder only to prevent operating errors from happening.
- 50 Ton Cylinder is single-acting, spring return type with a maximum working pressure of 10,000 psi.
- Electric Hydraulic pump is two stage version ; the low pressure stage provides the fast stroking to save time ; the high pressure stage is controlled by remote hand switch.
- Puller can be adjusted 5 degree vertically.
- The cart has two swivel castors which can provide the movement of cart easily.

- Four extensions are included for the needs on extra stroke.
- PRE50T is designed as the competitive version for costwise option.

*** This model is patented in Taiwan & Germany, and patent pending in USA & PRC.**


PRE50T
(Short Jaw Model)




50 TON EASY PULLER

POWERRAM
HYDRAULIC TOOLS


MODEL:PMEM50T

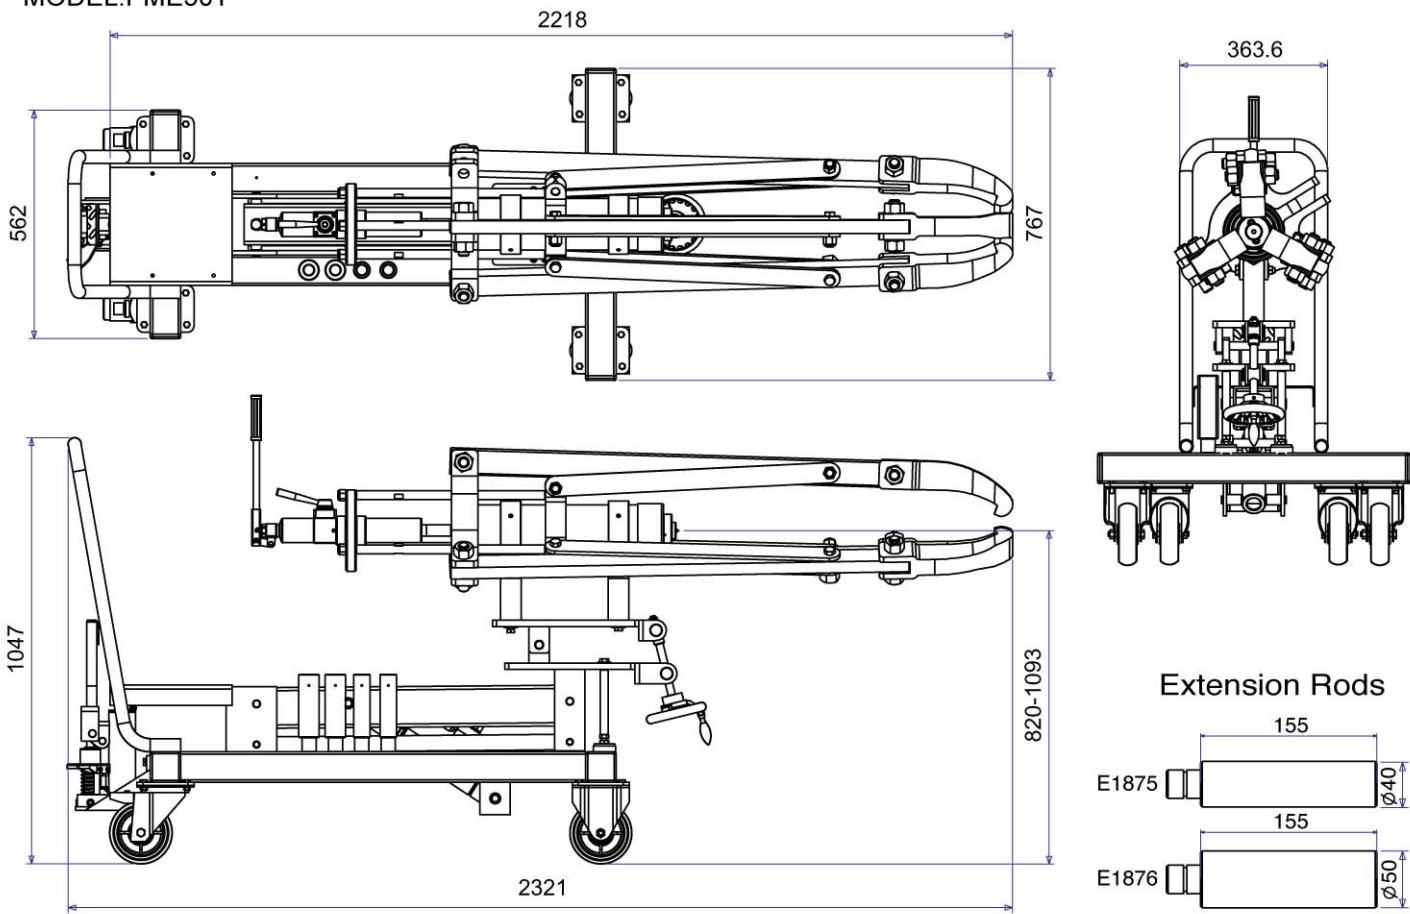

Extension Rods



MODEL:PRE50T

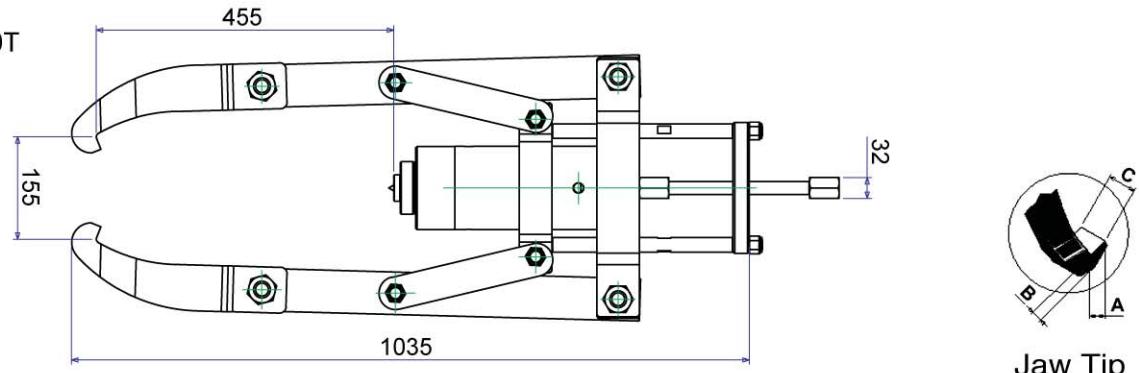

Jaw Tip

SPECIFICATIONS

Model No.	Reach (Max/mm)	Spread (Min-Max)	Stroke (mm)	Overall Dimensions (mm)	Power Source	Weight (kgs)	Jaw Tip			Extension Rod***	
							A	B	C	E1876	E1875
PME50TE*	780	200-1250	330	2545x800x1155	220V / 50Hz	400				2	2
PME50T	780	200-1250	330	2545x800x1155	---	369	23	35	60	2	2
PRE50T**	455	160-860	159	364x1035	---	140				1	1

* This model is equipped with Electric Pump - EP18S.

** The hand pump is not included in this model, recommend model is AHP703.

*** Quantity of extension rod are included.

ELECTRIC PUMP - Specification

Model No.	Acting	Reservoir Capacity(c.c.)	Function	Motor	Oil Del. (c.c./min. @)			
					0 psi	100 psi	5000 psi	10000 psi
EP18S	Single	8000	Adv./Hold/Retract	0.45KW 220V 50/60 Hz Single Phase	4000	2800	330	280

100 & 150 TON EASY PULLER

POWERRAM
HYDRAULIC TOOLS

**Simple & Easy, User-Friendly,
Safety and Cost Saving - Our Goals Always!**



FEATURES


- Double acting hydraulic system for holding, opening & closing jaws for safe & secure grip on work object always.
- Self-centering design keeps puller jaws clamp work object evenly and automatically.
- Electrical Hydraulic Pump advances and retracts the pushing cylinder only to prevent operating errors from happening.
- The easy jaw head adjusting system prevents puller jaws from sliding and spring off the work object being pulled always.
- Puller can be converted into 2 or 3-WAY configurations.
- Puller can be adjusted with 5 degree up/down of puller centerline for precisely positioning.

- The cart swivel castors provide movement of cart easily.
- Electrical Hydraulic Pump is two stage version ; the low pressure stage provides the fast stroking to save time ; the high pressure stage is controlled by remote switch.
- 100 Ton Cylinder is 2-stages, spring return type with a maximum working pressure of 10,000 psi.
- Five extension adapters are standard attachments for the needs on extra stroke.
- **Integrated Control System for operating Lift and Push easily and efficiently by Electric Pump only. (Equipment on requesting)**

*** These models are patented in Taiwan & Germany, and patent pending in USA & PRC.**

100 TON EASY PULLER

POWERRAM
HYDRAULIC TOOLS

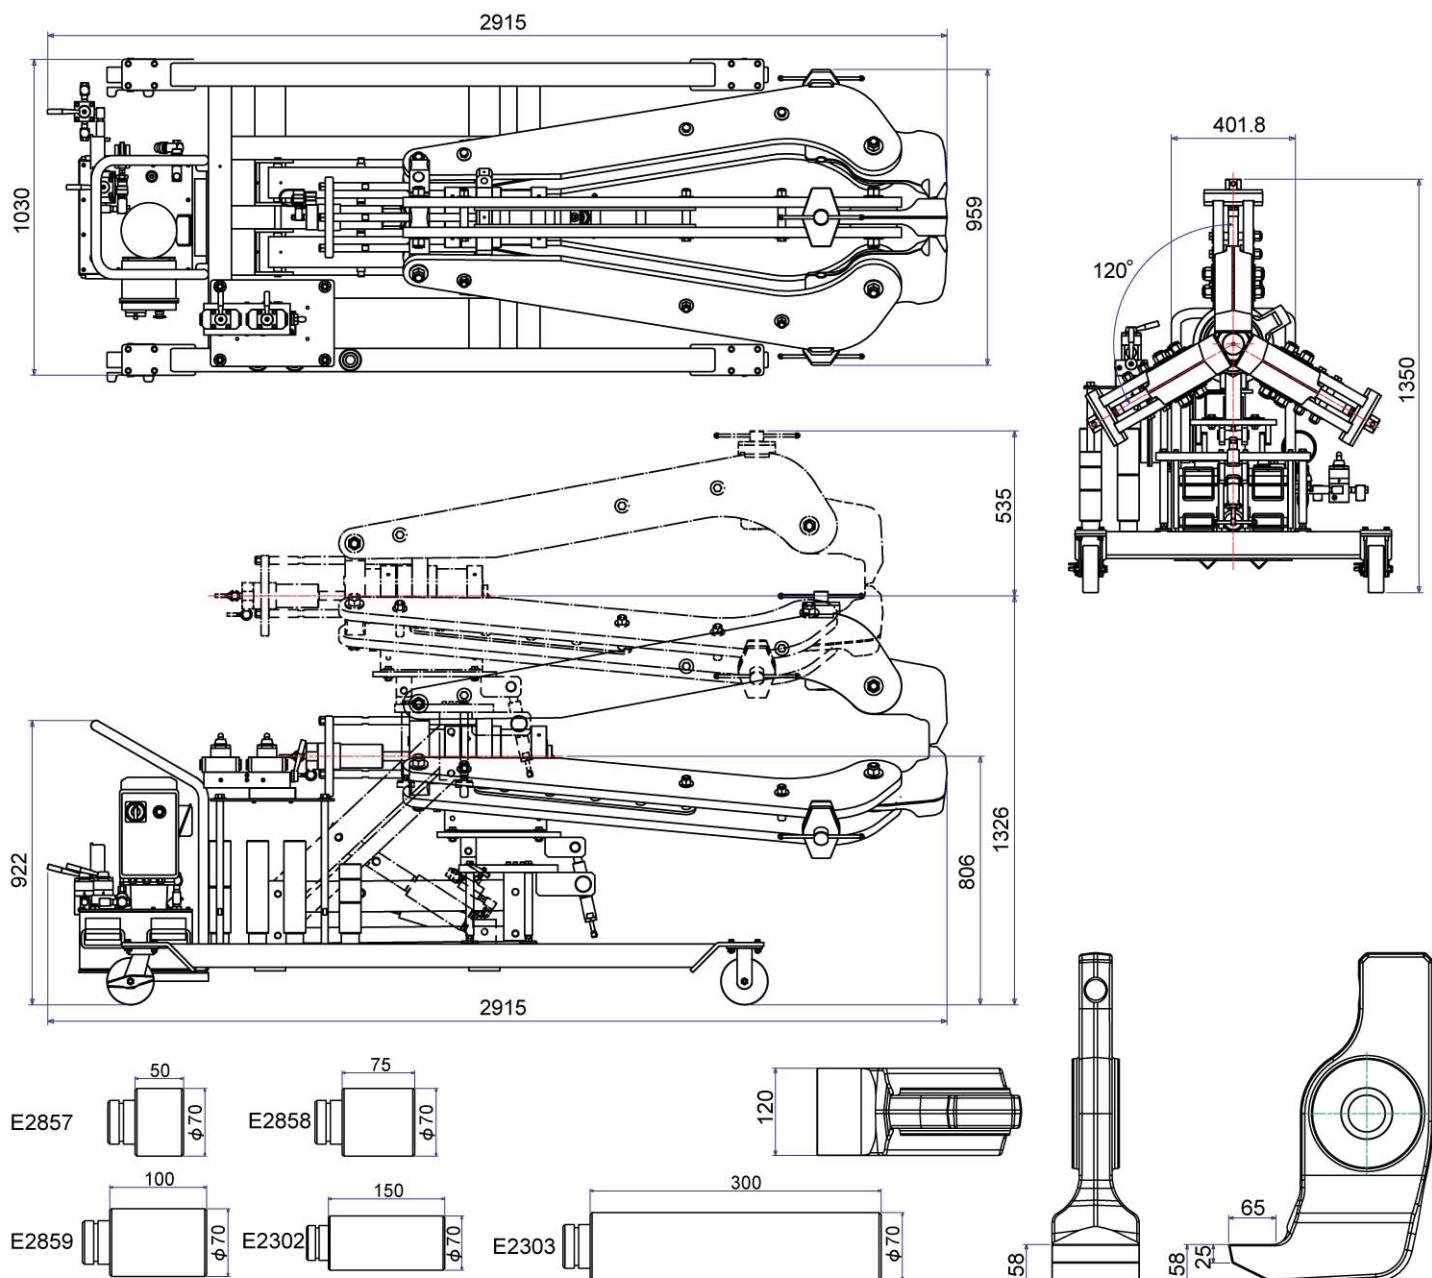

EXTENSIONS & JAW TIP

Part No.	Dia. (mm)	Length (mm)	Qty (pc)	Jaw Tip Dimensions (mm)
E2857		50	1	
E2858		75	1	
E2859		100	1	
E2302		150	2	Tip Depth: 65 Tip Clearance: 25 - 58 Tip Width: 120
E2303		300	2	

SPECIFICATIONS

Model No.	Reach (Min-Max)	Spread (Min-Max)	Stroke (mm)	Overall Dimensions (mm)	Power Sources	Weight (kgs)
PME100T	952-1220	300-1500	270	2915x1035x1350	---	1120
PME100TE*	952-1220	300-1500	270	2915x1035x1350		1185


* This model is equipped with the Electric Pumps according to Customer's requirement.

* ELECTRIC PUMPS:

We suggest two models of EP211 & EP420 as the options.
Please contact with our distributors for further information.

150 TON EASY PULLER

POWERRAM
HYDRAULIC TOOLS

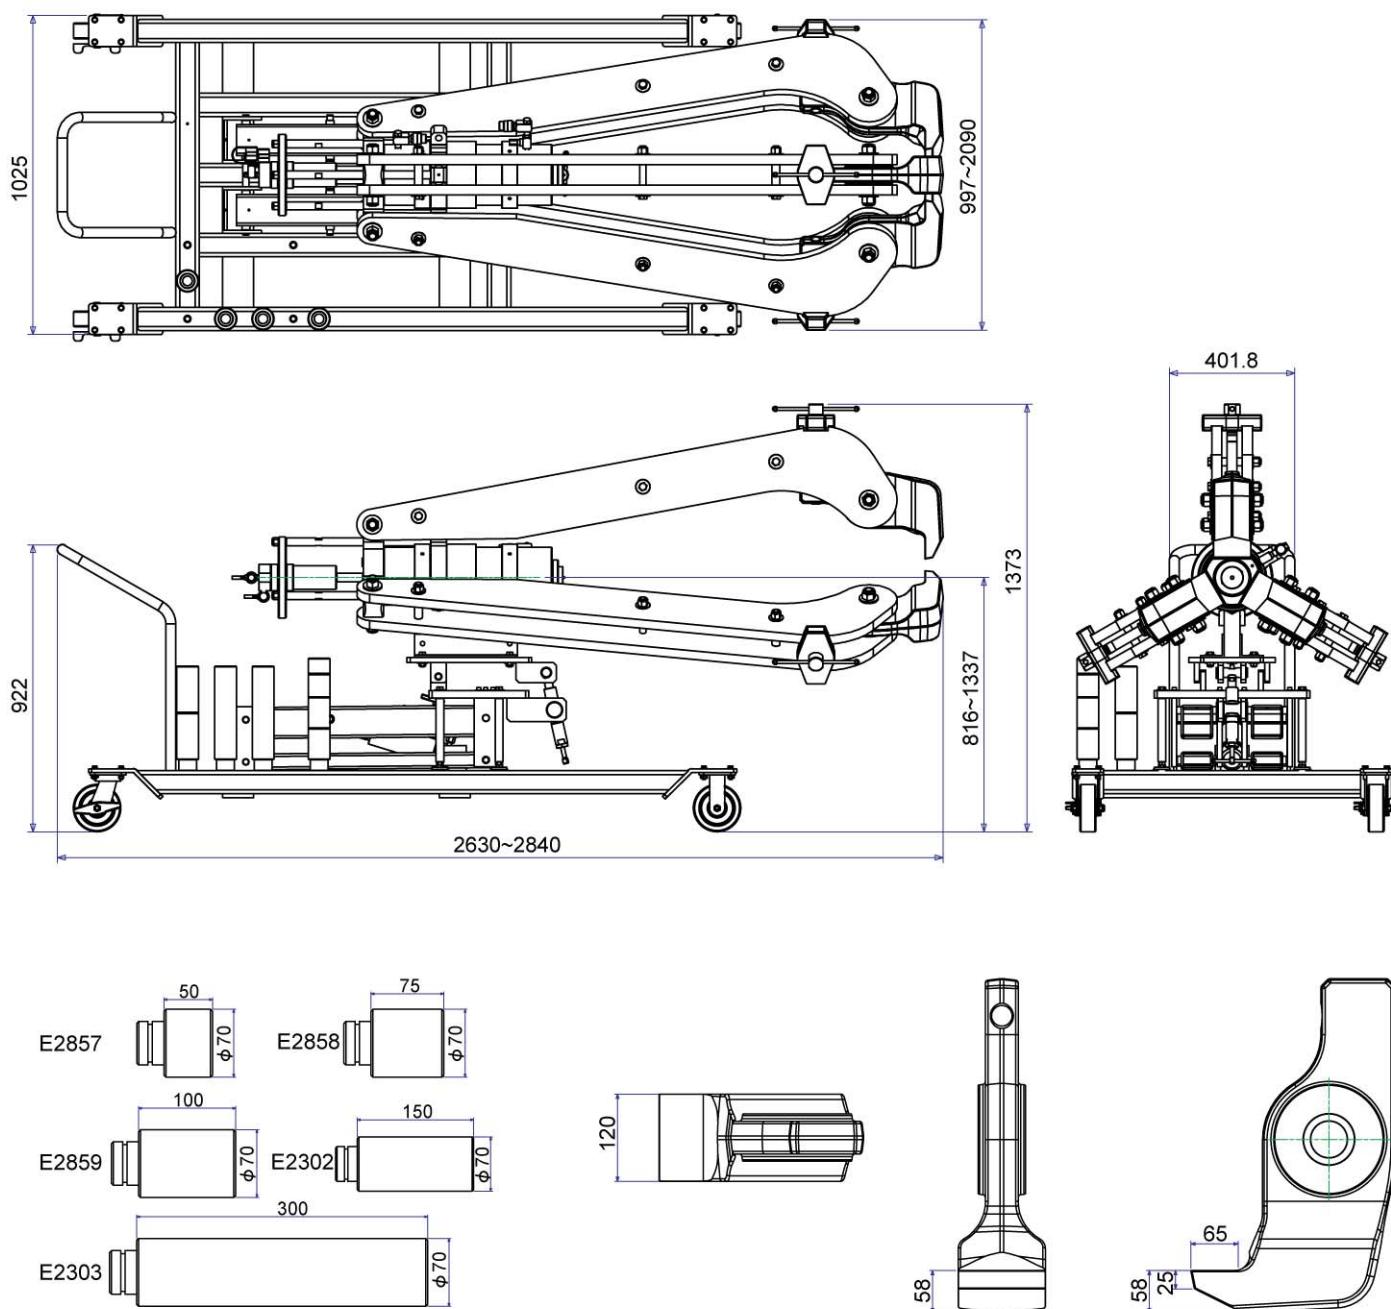

EXTENSIONS & JAW TIP

Part No.	Dia. (mm)	Length (mm)	Qty (pc)	Jaw Tip Dimensions (mm)
E2857		50	1	
E2858		75	1	
E2859	70	100	2	Tip Depth: 65 Tip Clearance: 25 - 58 Tip Width: 120
E2302		150	2	
E2303		300	2	

SPECIFICATIONS

Model No.	Reach (Min-Max)	Spread (Min-Max)	Stroke (mm)	Overall Dimensions (mm)	Power Sources	Weight (kgs)
PME150T	970-1175	300-1650	330	2990x1030x1390	---	1200
PME150TE*	970-1175	300-1650	330	2990x1030x1390		

* This model is equipped with the Electric Pump - EP420 & Control Panel System.

100 Ton Push Puller (Railroad Version)

POWERRAM
HYDRAULIC TOOLS



Accessory Set for Metric & Inch (Class B ~ F)

FEATURES

- Dismantle or Install the tapered roller bearings easily and efficiently.
- Specially designed for the major bearing manufacturers.
- The simple, efficient and easy operation provided with the pulling force - 100 Ton.
- Single Unit with portable design for easy, convenient positioning and saving storage space much.
- The basic equipment in most wheel shops.



Accessory Set for Inch (Class G ~ GG)

Universal railroad axle journal roller bearing push puller

Now, we are available to provide the basic tool in the most wheel shops for dismantling and installing the axle journal roller bearings. With this proper equipment and know-how, you can save the maximum of time and effort on maintenance for sure.



From class B through GG, each unit service a full line of bearings with rotating end caps. Simply remove the end caps, slip the pulling shoe between the bearings and the wheel, start the pump, the bearing being removed within seconds under the pulling force of 100 Ton easily.

The pulling shoe and installing tube ensure the most convenient and fast installation. 100-ton hydraulic cylinder is working under 10,000 psi always.

100 Ton Push Puller (Railroad Version)

POWER M
HYDRAULIC TOOLS

MODEL: BRBP100T

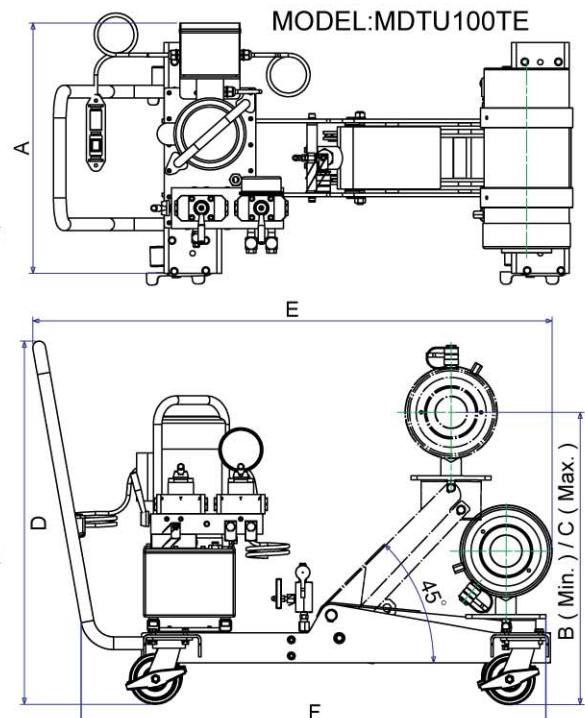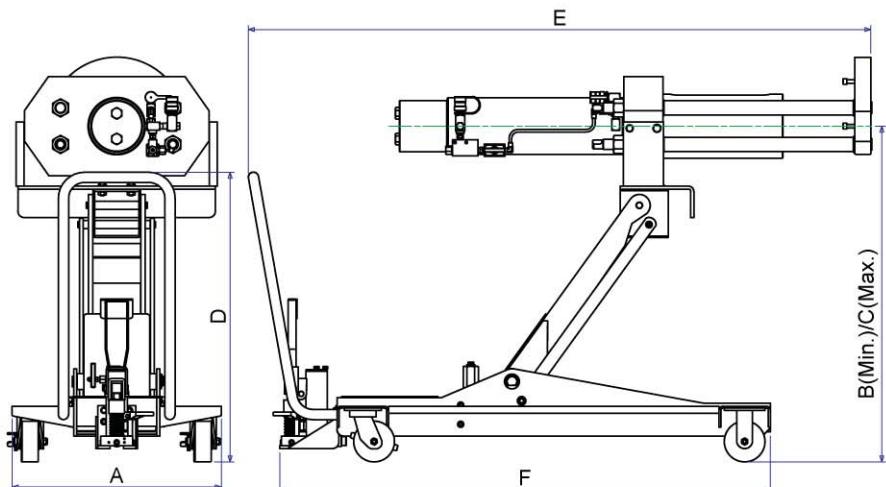

Accessory Set order information - IMPORTANT...

This accessory chart applies only to AAR configuration for vehicle maintenance applications.

Class & Size of bearing assembly - TBU & SP " Metric Accessories "

Accessory Description	#120	#130	#140	#150
Pulling Shoe Insert Adapter	F0436	F0437	F0438	F0439
Guide Tube & Cap Screw Assembly	E2601	E2602	E2603	E2604
Cap Screw**	H0421	H0421	H0421	H0422
Guide Tube Adapter	B1248	B1248	B1248	B1248
Installing Tube Adapter Ring	D1031	D1032	D1033	D1034

Class & size (inch) of bearing assembly to be serviced

Accessory Description	Class B	Class C	Class D	Class E	Class EE	Class EE	Class F	Class G	Class G	Class GG
	4 1/4" x 8"	5" x 9"	5 1/2" x 10"	6" x 11"	5 1/2" Axle.	6" Axle.	6 1/2" x 12"	7" x 12"	6 1/2" Axle.	6 1/2" Axle.
Pulling Shoe					No. F0442 is included as part of basic machine			F0443	F0443	F0443
Pulling Shoe Insert Adapter	F0440	F0437	F0438	F0439	F0439	F0441	F0441	---	---	---
Guide Tube & Cap Screw Assembly	F0435-1	F0435-2	E2605	E2606	E2607	E2608	E2609	E2611	E2610	E2612
Cap Screw**	H0423	H0424	H0425	H0426	H0427	H0425	H0428	H0430	H0429	H0429
Guide Tube Adapter	B1247	B1246	B1246	B1248	B1248	B1248	B1248	B1248	B1248	B1248
Installing Tube					No. D1044 is included as part of basic machine			D1045	D1045	D1045
Installing Tube Adapter Ring	B1243	D1037	D1038	D1039	D1039	D1040	D1040	D1042	D1041	D1041

Note: Adapter listed above are for servicing the following roller bearing assemblies: Bremco " Crown-Taper ", New Departure-Hyatt " HyRoll Taper ", SKF " Expediter " and Timken " AP ".

* Screws are supplied with the guide tube and should be ordered as replacements only.

SPECIFICATIONS

Model No.	Stroke (mm)	Capacity (Ton)		A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Weight (kg)
		Pull	Inst.							
BRBP100T	392	100	68	652	370	1047	900	1940-2209	1530	590
BRBP100TE*	392	100	68	652	370	1047	900	1940-2209	1530	805
MDTU100TE*	254	100	68	627	384	731	909	1299	1175	410

* This model is equipped with the Electric Pump - EP211D.

ELECTRIC PUMP - Specifications

Model No.	Acting	Reservoir Capacity (c.c.)	Function	Motor	Oil Del. (c.c./min. @)			
					0(psi)	100(psi)	5000(psi)	10000(psi)
EP211D	Double	11000	Adv./Hold /Retract	1.12KW 220V 50/60 Hz Single Phase	8200	7400	840	750

HYDRAULICAL SPREADERS

POWERRAM
HYDRAULIC TOOLS

Loads are lifted perpendicularly!




SR15




TL07



SR07

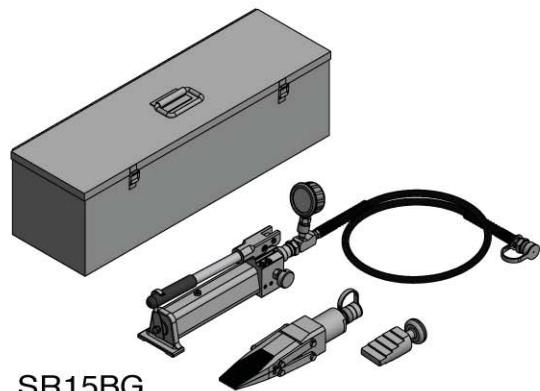

SR15BG

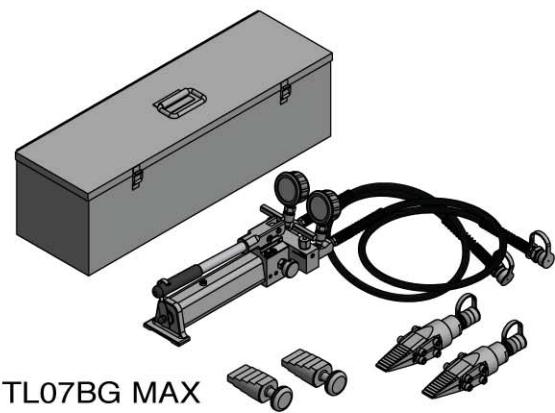


TL07BG MAX

FEATURES

- Ideal for numerous industrial maintenance repair jobs.
- Accurate height adjustments (for instance shaft alignment) can easily be executed by one person.
- Easy, light and very practical to use.
- Particularly suitable when available space is very limited, from 5 to 40 mm.
- Due to the reduced thickness of the jaws, made of high quality hardened steel, these multi-functional wedges can be used for jobs where working space is extremely limited.
- Package models are also available, please contact with the authorized distributors for details.

SR07-TL07

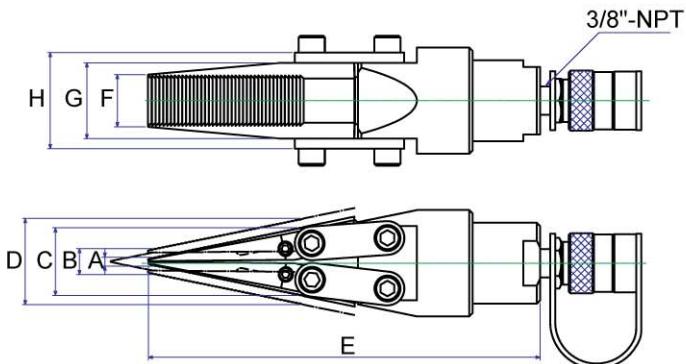


SPECIFICATIONS

Model No.	Capacity Tons	Spread (mm)		Stroke (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	Weight (kgs)
		Min - A	Max - B								
SR07	15	5	15	25	40	50	232	31	45	57	3.3
SR07BG	15	5	15	25	40	50	232	31	45	57	3.3
SR07BG MAX	15 x 2	5	15	25	40	50	232	31	45	57	3.3
TL07	15	5	15	25	36	46	232	31	45	57	3.3
TL07BG	15	5	15	25	36	46	232	31	45	57	3.3
TL07BG MAX	15 x 2	5	15	25	36	46	232	31	45	57	3.3
SR15	25	7	23	65	42.5	59	342	50.5	70	82	7.8
SR15BG	25	7	23	65	42.5	59	342	50.5	70	82	7.8
SR15BG MAX	25 x 2	7	23	65	42.5	59	342	50.5	70	82	7.8

HYDRAULIC FLANGE SPREADER - PFS10T

POWERRAM
HYDRAULIC TOOLS


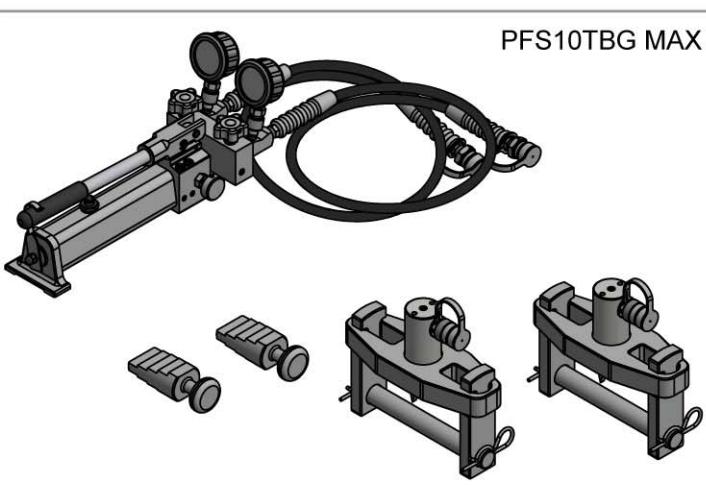


FEATURES

- Suggest to use in sets for an even and higher spreading force.
- The claw widths are adjustable from 104 mm to 216 mm for wide range usage.
- All models are including safety block to remove the spreader and hold the loading.
- PFS10TI has a built-in hydraulic system, therefore the hand pump, hose and gauge are not necessary.

SPECIFICATIONS

Model No.	Package included				
	Hand Pump	1.5M Hose & Coupler	Gauge & Adaptor	Safety Block	Steel Case
PFS10T MIN	--	--	--	V	--
PFS10TBG	V	V	V	V	V
PFS10TBG MAX	V	x 2	x 2	x 2	V
PFS10TI	--	--	--	V	V

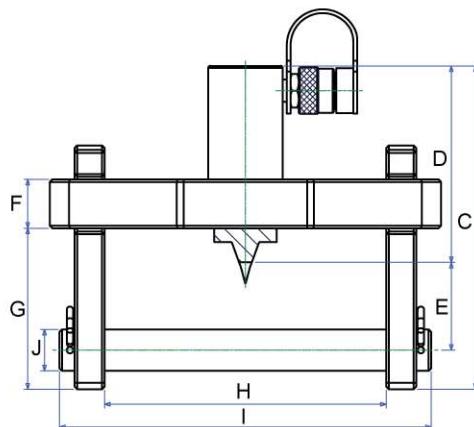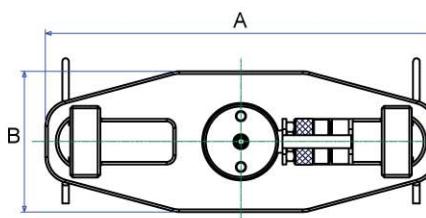

SPECIFICATIONS

Model No.	Max. Flange Thickness (mm)	Stud Size (mm)	Standard Wedge (mm)	Capacity (Ton)	Stroke (mm)	Oil Capacity (cm³)	A (mm)	B (mm)	C (mm)	F (mm)	G (mm)	H (mm)	I (mm)	J (mm)	Weight (kgs)
PFS10T MIN	216	31.75-41.44	3.3 - 28.7	10	51	73	300	108	248	38	124	216	285	31.75	15
PFS10TBG	216	31.75-41.44	3.3 - 28.7	10	51	73	300	108	248	38	124	216	285	31.75	25.2
PFS10TBG MAX	216	31.75-41.44	3.3 - 28.7	10 x 2	51	73	300	108	248	38	124	216	285	31.75	46.6
PFS10TI	216	31.75-41.44	3.3 - 28.7	10	51	73	300	108	375	38	124	216	285	31.75	17.5

NUT SPLITTERS

POWERAM
HYDRAULIC TOOLS



MODEL: HNS SERIES

Capacity: 10 - 50 Tons



FEATURES

- Compact design used in confined space with enough force to split the rusted nuts.
- All models feature a rugged one-piece cutting frame coupled to a heavy-duty hydraulic cylinder.
- Specially designed " tool steel " cutter blade cuts the nut to the precise point where it cracks.
- Unique angled head design to keep full contact with the nut being penetrated.
- Unique angled cutter blade with radius to have the greater resistance to cutting and breaking nuts.
- 5 popular models applicable to cover the most range of nuts.

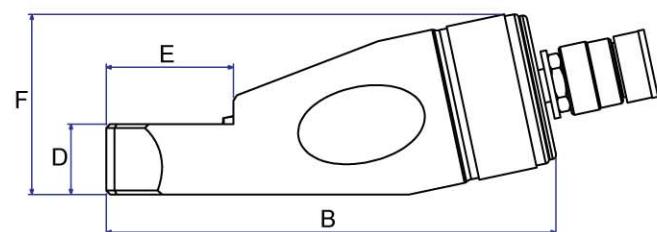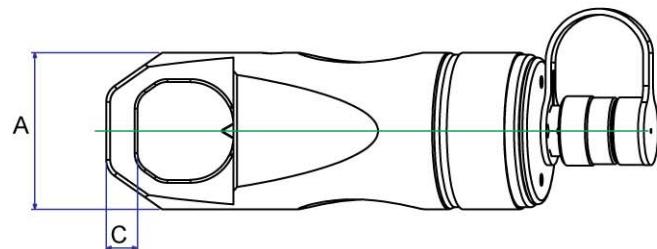

SPECIFICATIONS

Model No.	Hexagon Nut Range (mm)	Bolt Range (mm)	Capacity (ton)	Oil Capacity (c.c.)	Dimensions(in)						Weight (kg)
					A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	
HNS1924	19-24	M12-M16	10	18	60	171.5	10	25	40	68	2.2
HNS2432	24-32	M16-M22	15	40	70	192	13	30	52	79	3.3
HNS3241	32-41	M22-M27	20	68	80	230	16	36	65	92	4.4
HNS4150	41-50	M27-M33	35	150	100	286	21	45	76	116	8.2
HNS5060	50-60	M33-M39	50	250	117	321	24	54.5	92	134	11.7

Notes: The Hardness of Nut Material must not exceed HRc-44.

Should not be used on stainless steel nuts and/or square shape nuts.

TOE JACKS

POWERRAM
HYDRAULIC TOOLS


MODEL: TOE SERIES

Capacity: 2.5 - 50 Tons



FEATURES

- Heat treated & chrome plated hydraulic rod provide longer seal life and optimum performance.
- Internal safety valve prevents toe jack from being used beyond its rated capacity.
- Housing welding onto the forged base ensures to be free of leakage problem.
- High strength Toe-Lift for long life use.
- Low toe heights fit in tight clearances.
- Swivel sockets for easy operation.
- Can be operated quickly by hand without a loading.
- Removable handle saves the handle force during operation.
- Max. Working Pressure 700 bar / 10,000 psi

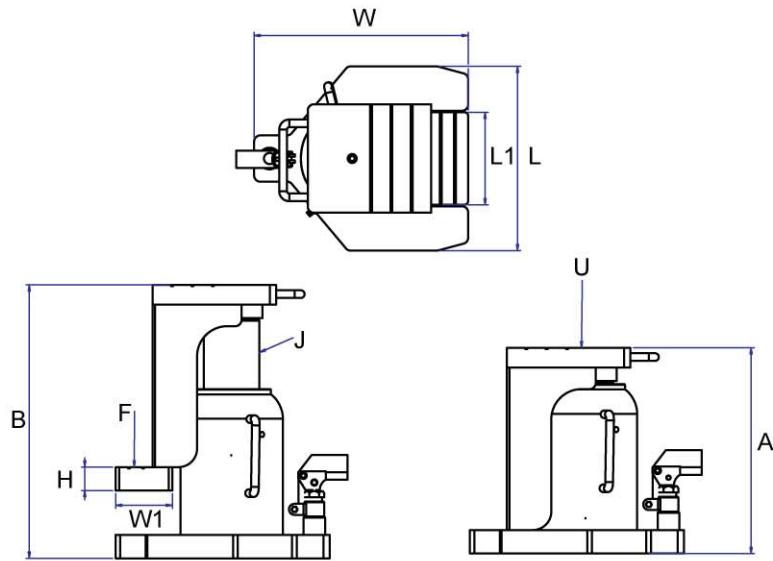

SPECIFICATIONS

MODEL	TOP CAP. U(tons)	TOE-LIFT CAP. F(tons)	STROKE (mm)	MIN. HEIGHT A(mm)	MAX. HEIGHT B(mm)	PISTON ROD DIA. J(mm)	BASE DIMENSIONS LxW(mm)	HEIGHT H(mm)	TOP-LIFT L1xW1(mm)	WEIGHT (Kgs)
TOE-025	2.5	1.2	100	194	294	19	140X190	19	65X50	7.4
TOE-040	4	2	110	204	314	25	150X200	19	65X50	9.0
TOE-060	6	3	110	212	322	36	160X217	19	65X50	11.3
TOE-100	10	5	130	258	388	40	189X242	22	75X55	17
TOE-160	16	8	131	275	406	52	211X256	25	90X55	23.2
TOE-200	20	10	140	303	443	56	228X274	25	100X60	33.1
TOE-300	30	15	147	322	469	70	259X305	32	110X60	52
TOE-500	50	25	148	333	481	90	299X347	38	150X60	84

LOW-HEIGHT JACKS

POWERRAM
HYDRAULIC TOOLS


MODEL: CJ SERIES

Capacity: 10 - 20 Tons



FEATURES

- Integrated pump & spring return cylinders, with low build-in height.
- Max. working pressure: 10,000 psi / 700 bar.
- Hard chromed piston
- Ram inside roll polished
- Perfect for jobs with limited space, for example: positioning machines, mounting tools or load tests.


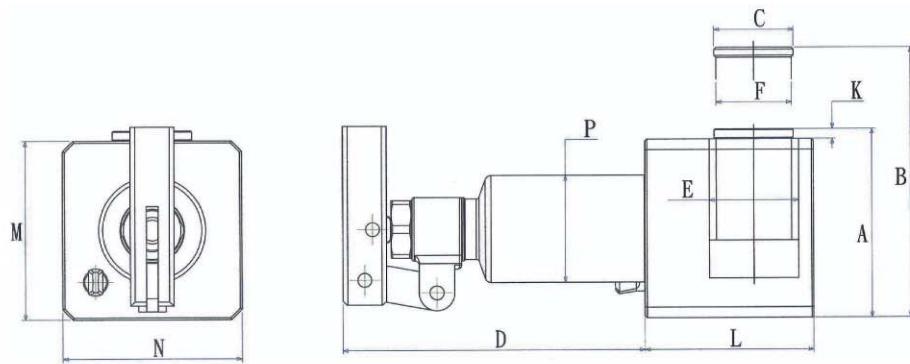


SPECIFICATIONS

Model No.	Cap. (Ton)	Stroke (mm)	Oil Cap. (cm³)	A B Height(mm)		C Ømm	D mm	E Ømm	F Ømm	H mm	K mm	L mm	M mm	N mm	P Ømm	Weight (kg)
				Retracted	Extended											
CJ100	10	40	155	95	135	40	152.5	45	37.95	407.5	4.9	85	90	90	53.8	5.5
CJ200	20	41	250	95	136	40	152.5	65	50.8	407.5	4.9	110	90	110	69.8	8


BOTTLE JACKS & AIR / HYDRAULIC JACKS

POWERRAM
HYDRAULIC TOOLS

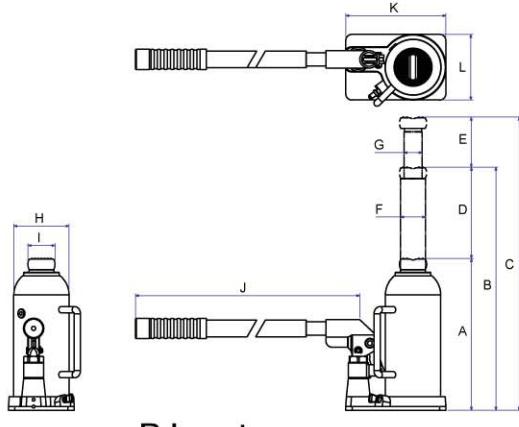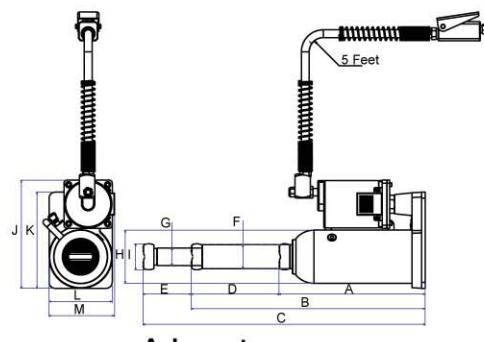

FEATURES

- Low profile design for most of Industrial applications.
- Forging base as the strongest construction to catch the needs in Industry market.
- Design of housing welding onto the forged base prevent the leakage problem.
- Telescopic design of AJ120, AJ220, AJB1527 & AJB2035 reaches the extra height during operating to save time and labor cost.
- AJBseries are equipped with two large Dia. rubber wheels provide easy and well mobility works.
- Air/Hydraulic design make you free from pumping handle also with the most efficiency and time saving.

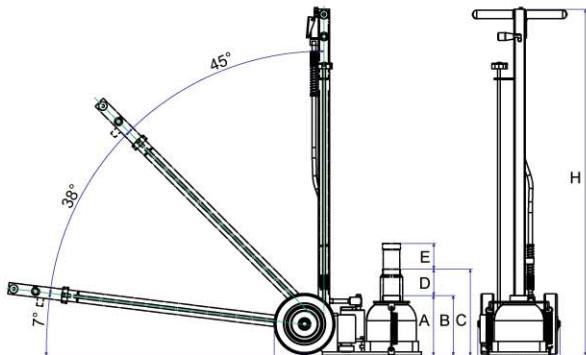

SPECIFICATIONS

Model No.	Capacity (ton)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	J (mm)	K (mm)	L (mm)	M (mm)	Handle Length	Weight (kg)
AJ120	12	243	389	469	146	80	40	29	88.5	43	180	160	105	109	290	10.0
AJ220	22	240	369	449	129	80	56	38	114	54	207	—	130	—	290	15.1
AJ300	30	279	423	—	144	—	65	—	140	—	235	—	150	154	290	26.0
AJ500	50	304	452	—	148	—	75	—	165.5	—	260	—	180	—	290	39.4
BJ120	12	243	389	469	146	80	40	29	88.5	43	507	160	105	—	500	10.0
BJ220	22	240	369	449	129	80	56	38	114	54	507	190	130	—	500	14.5
BJ300	30	279	423	—	144	—	65	—	140	—	507	235	150	—	500	27.0
BJ500	50	304	452	—	148	—	75	—	165.5	—	507	260	180	—	500	36.8
AJB1527	15/27	200	287	374	87	87	490	274	1155	—	—	—	—	—	—	38.5
AJB2035	20/35	200	287	374	87	87	490	274	1155	—	—	—	—	—	—	45.0
AJB300	30	247	345	—	98	—	460	274	1155	—	—	—	—	—	—	43.0
AJB500	50	266	367	—	101	—	490	274	1155	—	—	—	—	—	—	53.5

* All handle length is 630mm.

PORTRABLE POWER KITS

POWERRAM
HYDRAULIC TOOLS



FEATURES

- Quick "snap together" design for fast and easy assembly and disassembly.
- Extra thick extension tubes design for more strength and bendless.
- Blow molded case for organized component storage and easy to carry. The case for 10 Ton kit has wheels for good mobility.
- Single-speed pump delivers 10,000 psi and with automatic overload system against operator injury.
- Flexible hydraulic hose with spring guards at both ends.
- Dropping forged pump base and rugged welded constructions prevent collision and deformation.
- Components are also made by forging with the best rigidity and strength to ensure never broken during operation with high safety.
- Each components are connected through female connector for easy operation.

PA904A

ITEM	PARTS NO.	DESCRIPTION
01	PA350	Hydraulic Pump
02	HS236	Hose 6 feet
03	RA404	4 Ton Ram, 4" Stroke, 1/4NPT
04	SR05A	1/2 Ton spreader ram
05	B0523	16" Extension tube
06	B0524	12" Extension tube
07	B0525	8" Extension tube
08	B0526	4" Extension tube
09	B0467	Male connector
10	F0180	Flat base
11	F0181	90° "V" base
12	F0182	Wedge head
13	F0183	Spreader Plunger Toe
14	F0184	Spreader Ram Toe
15	B0013	Flex head
16	F0179	Serrated saddle
17	G0026	Blow molded case

N.W. 18.6KG G.W. 19.6KG CUFT. 1.4'



PA910A

ITEM	PARTS NO.	DESCRIPTION
01	PA600	Hydraulic Pump
02	HS236	Hose 6 feet
03	RA106L	10 Ton Ram, 6" Stroke, 3/8NPT
04	SR05E	1/2 Ton spreader ram
05	B0519	19" Extension tube
06	B0520	14" Extension tube
07	B0521	10" Extension tube
08	B0522	5" Extension tube
09	B0406	Male connector
10	F0174	Flat base
11	F0175	90° "V" base
12	F0176	Wedge head
13	F0177	Spreader Plunger Toe
14	F0178	Spreader Ram Toe
15	B0083	Flex head
16	F0173	Serrated saddle
17	G0021	Blow molded case with wheels


N.W. 36.5KG G.W. 37.5KG CUFT. 2.6'

SHOP PRESSES

POWERRAM
HYDRAULIC TOOLS

MODEL: SP1301 / SP1401

Capacity: 10 Tons

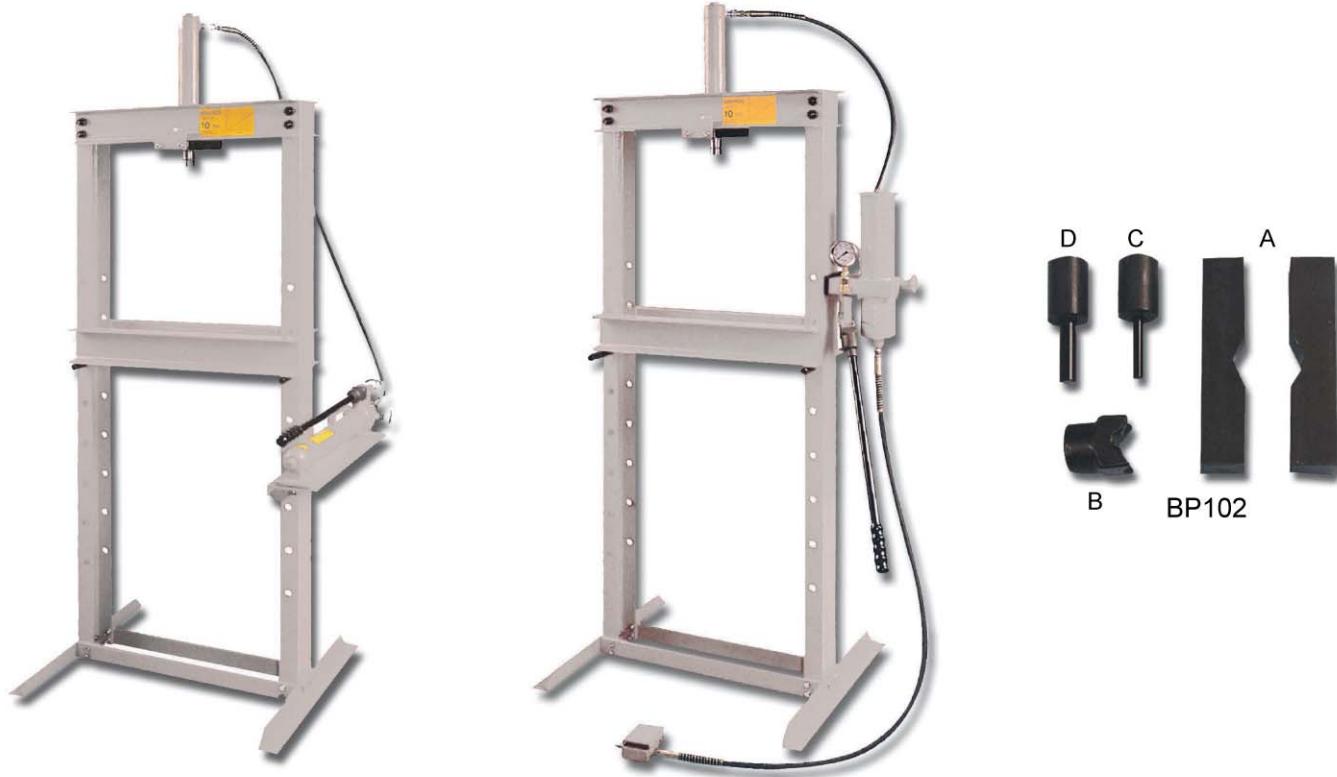


FEATURES

- Rugged steel frame provides maximum firmness to prevent bending.
- Multiple working position for press bed.
- Steel cross support prevent the frame from bending while loading.
- Single-acting and spring return cylinders with 10" stroke is horizontal movement on head channel.
- Available in 10 Tons models, with optional manual or air-hydraulic pump.

Accessory Set

Part No. / Item	A Long V-block	B V base	C Ram pushing adapter	D Ram pushing adapter	Weight (kgs)
BP102	E0650	E0175	B0547 (1/2" shank)	B0548 (3/4" shank)	9.5

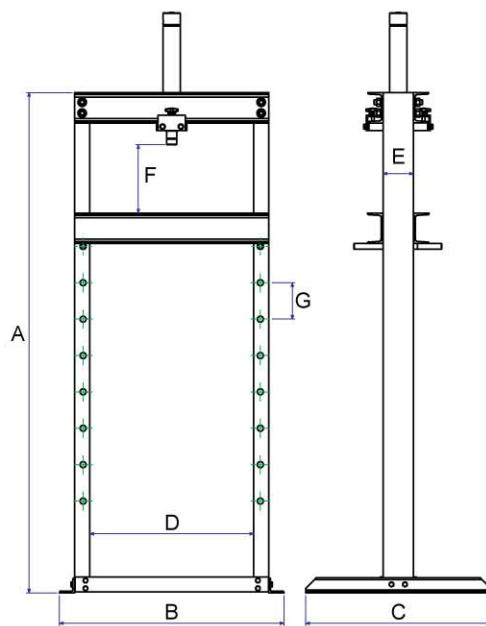

SPECIFICATIONS

Model No.	Capacity (ton)	Stroke (mm)	Pump Type	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	Weight (kgs)	Accessory Set
SP1301	10	254	Manual Two speed	1650	740	610	540	100	255-1065	120	87	BP102
SP1401	10	254	Air	1650	740	610	540	100	255-1065	120	90	BP102

SHOP PRESSES

POWERRAM
HYDRAULIC TOOLS

MODEL: SP2101 / SP2201 / SP3201

Capacity: 20 -30 Tons




FEATURES

- Rugged steel frame provides maximum firmness to prevent bending.
- Multiple working position for press bed.
- Steel cross support prevent the frame from bending while loading.
- Single-acting and spring return cylinders with 10" stroke is horizontal movement on head channel.
- Available in 20-30 Tons models, with optional manual or air-hydraulic pump.

Accessory Set

	A	B	C	D	
Part No. / Item	Long V-block	V base	Ram pushing adapter	Ram pushing adapter	Weight (kgs)
BP201	E0662	E0064	B0562 (3/4" shank)	B0563 (1" shank)	17.0

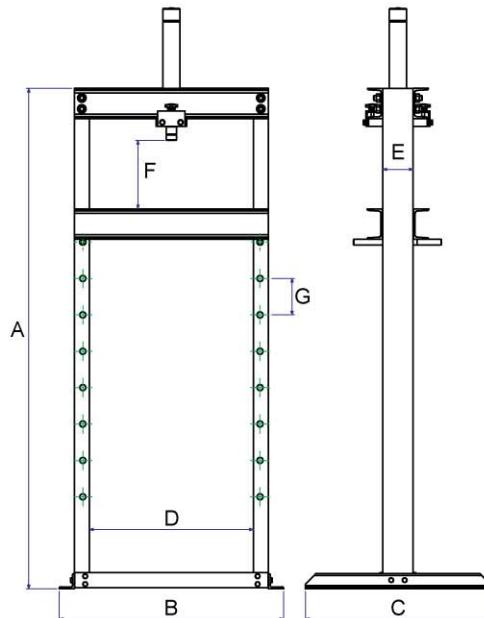

SPECIFICATIONS

Model No.	Capacity (ton)	Stroke (mm)	Pump Type	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	Weight (kgs)
SP2101	20	128	Manual Two speed	1650	790	700	510	125	233-1072	120	140
SP2201	20	128	Air	1650	790	700	510	125	233-1072	120	145
SP3201	30	204	Air	1631	920	700	620	150	306-1025	120	244

MODEL: HSP50T / HSP100T

Capacity: 50-100 Tons


HSP50T




FEATURES

- Ideal for the pressing job in the workshops.
- Rugged steel frame provide maximum rigidity and never bended.
- Multiple working positions for press bed.
- Steel cross brace prevents the frame from spreading under the load.
- 100 Ton, Single Acting, 13" Stroke Cylinder is available for requesting.
- 100 Ton, Double Acting, 18" Stroke Cylinder is available for requesting.
- 50 Ton shop presses: Hand Pump, Air Pump & Electric Pump are available upon request.
- 100 Ton shop presses: Electric Pump is available as the optional version.

MODEL:HSP50T

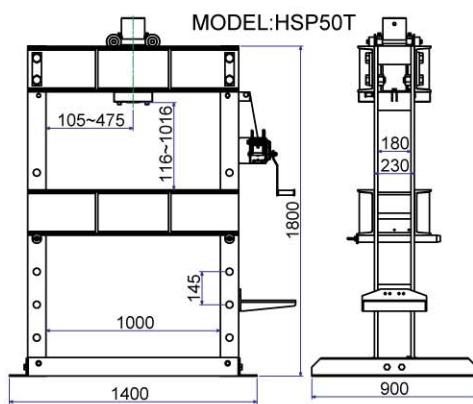

MODEL:HSP100T

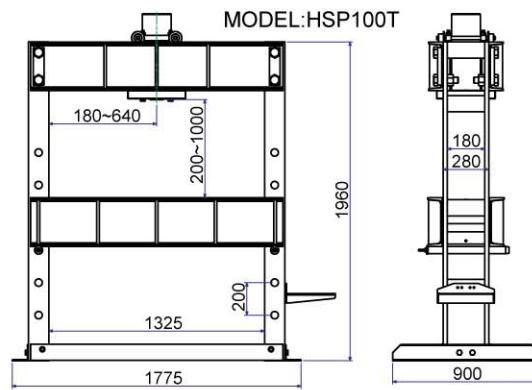

Specifications for reference:

Model No.	Capacity (ton)	Stroke (mm)	Pump Type	Max. Pressure Output (psi)	Reservoir Capacity (c.c.)	Motor	Weight (kg)	Dimension LxWxH (cm)	Accessory Set *
HSP5013H	50	330	HP80	10,000	7,000	-	440	186x108x207	* Long V-Blocks * V-Base * Ram pushing adaptor
HSP5013S	50	330	EP18S	10,000	8,000	0.37KW 220V 50/60 Hz, Single Phase	480	195x90x212	
HSP5018D	50	457	EP18D	10,000	8,000	0.37KW 220V 50/60 Hz, Single Phase	480	195x90x212	
HSP10013S	100	330	EP211S	10,000	11,000	1.12KW 220V 50/60 Hz, Single Phase	840	213x90x221	* Long V-Blocks * V-Base
HSP10018D	100	457	EP211D	10,000	11,000	1.12KW 220V 50/60 Hz, Single Phase	840	213x90x221	

*The above accessory sets will be changed according to the Selected Cylinder.

ACCESSORIES









POWERRAM
HYDRAULIC TOOLS

Max. Working Pressure - 700 bar / 10,000 psi





System Components

With the simple and complete line of hydraulic hoses, couplers, fittings, manifolds, gauges and valves, POWERRAM has the accessories to complete your hydraulic system and ensure the operating efficiency, long life and safety of your hydraulic equipment.

MANIFOLDS & FITTINGS

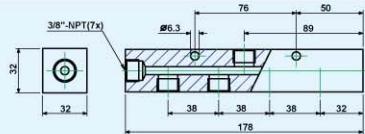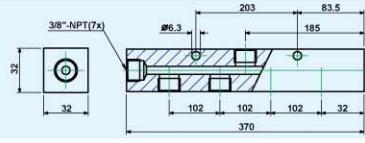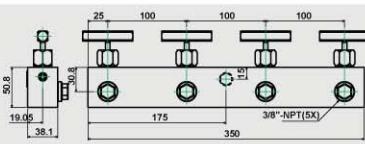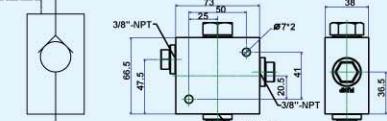Model No.	Dimensions (mm)	Description
JP64	 	7 Female ports - 178 mm Long
JP65	 	7 Female ports - 370 mm long Available directly mounting of control valves
JP66	 	6-Port Hexagon Type
VB201	 	Premounted Manifolds
VB401	 	Available as split-flow valve to control two / four single-acting cylinders simultaneously.
BV42	 	Pilot Check Valve
BV110	 	Load Lowering Valve
VH33	 	Non-return Valve

GAUGE ADAPTORS















Model No.	Dimensions (mm)	Model No.	Dimensions (mm)
E0567	 	E1343	 
E1336	 	E1745	 













ACCESSORIES

POWERRAM
HYDRAULIC TOOLS

Max. Working Pressure - 700 bar / 10,000 psi

FITTINGS


Model No.	Description	Dimensions (mm)
ADL101	Elbow	
ADL102	Elbow	
ADL202	Elbow	
ADL303	Elbow	
ADC303	Elbow	
ADE303	Elbow	
ADT101	Tee	
ADT202	Tee	
ADT303	Tee	
ADG303	Tee	
ADG323	Tee	
ADF102	Adaptor	
ADF203	Adaptor	
ADF302	Adaptor	

Model No.	Description	Dimensions (mm)
ADF303	Adaptor	
ADF304	Adaptor	
ADI202	Connector	
ADI203	Connector	
ADI303	Connector	
ADO101	Hexagon Nipple	
ADO202	Hexagon Nipple	
ADO2031	Reducing Connector	
ADO203	Reducing Connector	
ADO204	Hexagon Nipple	
ADO205	Hexagon Nipple	
ADO303	Hexagon Nipple	
BG9705	Swivel Connector	







ACCESSORIES

Max. Working Pressure - 700 bar / 10,000 psi

3-WAY Directional Control Valve

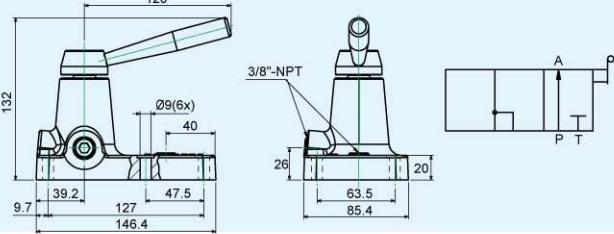Model No.	Description	Dimensions (mm)
BP2	700 bar ; 17 l/min Manual, 2-position, Advance/Retract for single-acting cylinders	

4-WAY Directional Control Valves







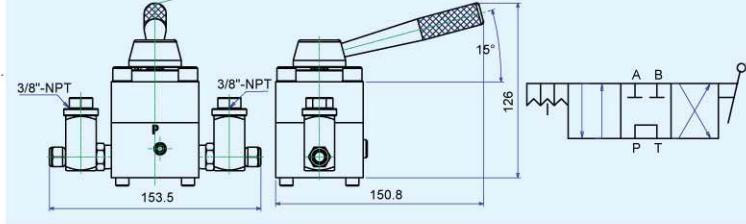
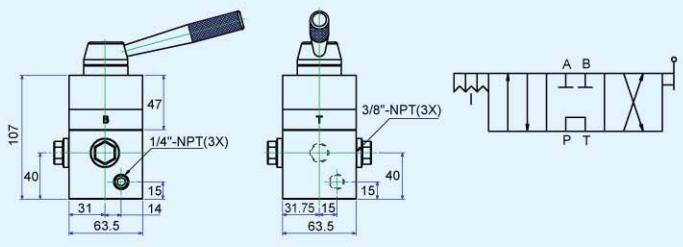

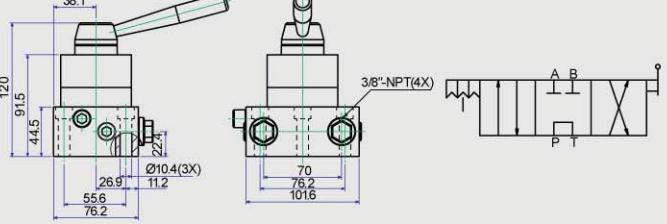
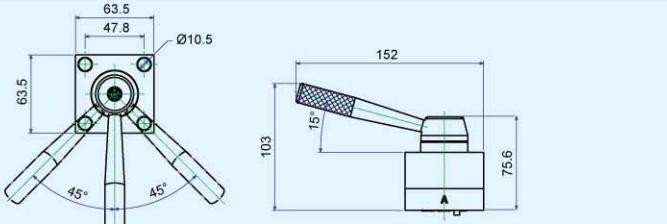
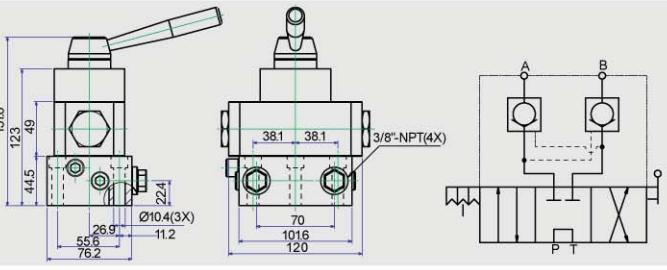
Model No.	Description	Dimensions (mm)
BP421	 <p>For using with single- or double acting cylinders. Manual, Advance / Hold / Retract</p>	
BP422		
BP423	 <p>Manual, Advance / Hold / Retract Available models HP80D, AP13D, AP18D, EP13D, EP18D, EP211D, EP320D & EP420D</p>	
BP42R	 <p>BP42R is the upper section of BP423 as enclosed only.</p>	
BP425	 <p>Manual, Advance / Hold / Retract, Lock for load holding.</p>	

ACCESSORIES

POWERRAM
HYDRAULIC TOOLS

Max. Working Pressure - 700 bar / 10,000 psi







4-WAY Directional Control Valves

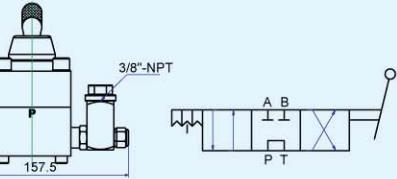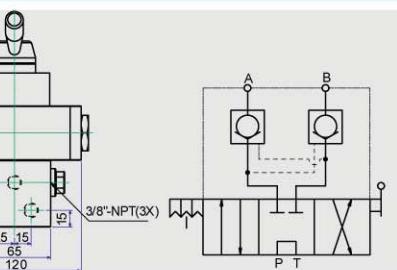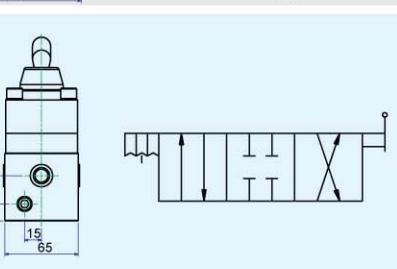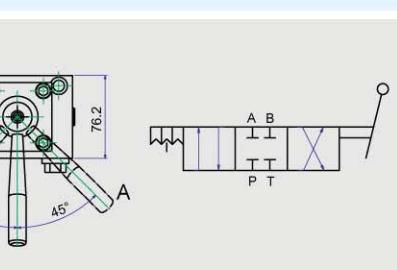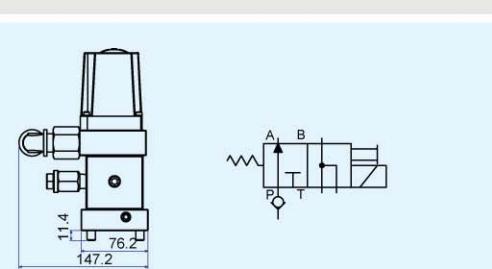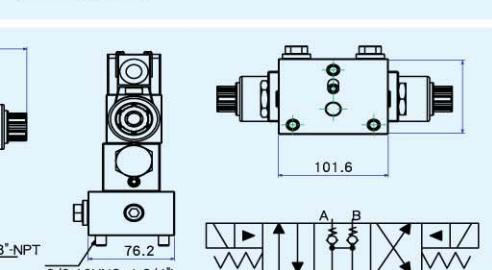Model No.	Description	Dimensions (mm)
BP426	BP426 is similar to BP421, but used on HP35D only.	  
BP427	Manual, Advance / Hold / Retract, Lock for load holding.	  
BP430	BP430 is similar to BP422, but with closed center.	  
BP432	Overlooking & mounting dimensions is same as BP423, but with closed center.	  
SV32	3 Way / 2 Position Solenoid Valve for Single-acting cylinders 24V / 110V / 220V	  
SV43	4 Way / 3 Position Solenoid Valve for Double-acting cylinders 24V / 110V / 220V	  

ACCESSORIES

Max. Working Pressure - 700 bar / 10,000 psi

Flow Control Valves

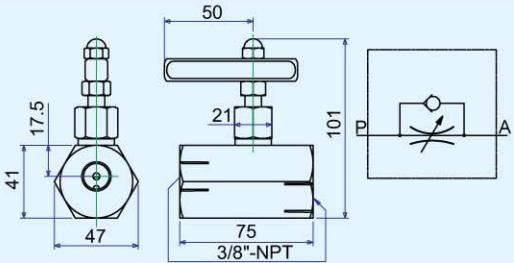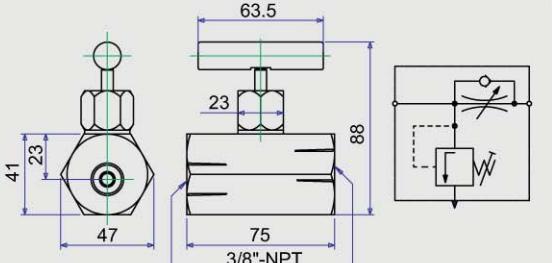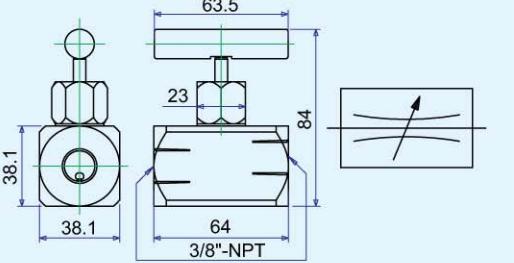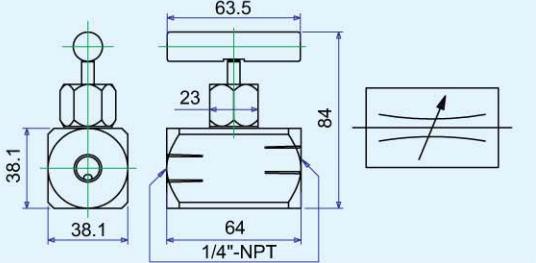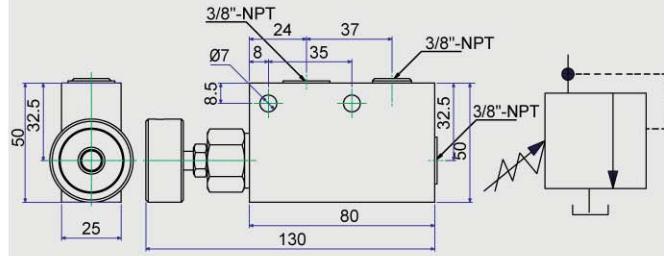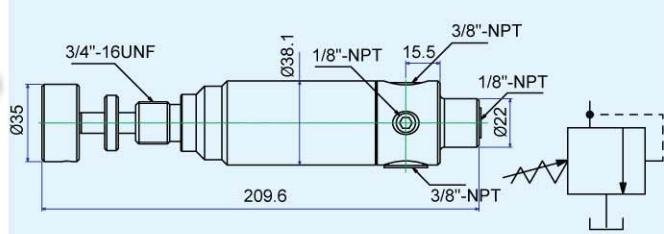Model No.	Description	Dimensions (mm)
VC331	Needle Valve To control cylinder speed, also can be used as shut-off valve for temporary holding. But not recommended to use for precise flow control. 	
VB66	Manually Operated Check Valve Used with single or double acting cylinders for load holding. Upon cylinder retracting, valve is manually opened to allow oil flowing back to the tank and with auto overload relief design. 	
VB101	Needle Valve (3/8"NPT ports) To be used as shut-off valve for temporary holding. Same as VB66, but without auto overload relief design. 	
VB102	Needle Valve (1/4"NPT ports) To be used as shut-off valve for temporary holding. Same as VB66 but without auto overload relief design 	
BG9623	In-line Pressure Relief Valve Used with single or double acting cylinders for remote locations in a hydraulic circuit where maximum pressure requirements are less than basic overload setting in a pump. 	
PRV9633	In-line Pressure Regulator Valve Used for single or double acting cylinders to permit adjusting operating pressures at various values below relief valve setting of pump. 	

ACCESSORIES

POWERRAM
HYDRAULIC TOOLS

Max. Working Pressure - 700 bar / 10,000 psi

HOSES

- Heavy duty hoses rated at 700 bar, meet IJ-1000 specification as worldwide safety standards.
- Hoses are black rubber coated with two layers of steel braided reinforcement.
- Flexible hoses with spring guard at both ends to protect adaptors.

Description	Model No.	End One	End Two	Length		I/D	
				(feet)	(mtr)	(inch)	(mm)
Rubber Hoses	HS225	1/4" NPT	1/4" NPT	5	1.5	1/4	6.4
	HS235	1/4" NPT	3/8" NPT	5	1.5	1/4	6.4
	HS226	1/4" NPT	1/4" NPT	6	1.8	1/4	6.4
	HS236	1/4" NPT	3/8" NPT	6	1.8	1/4	6.4
	HS332	3/8" NPT	3/8" NPT	2	0.6	1/4	6.4
	HS333	3/8" NPT	3/8" NPT	3	0.9	1/4	6.4
	HS335	3/8" NPT	3/8" NPT	5	1.5	1/4	6.4
	HS336	3/8" NPT	3/8" NPT	6	1.8	1/4	6.4
	HS337	3/8" NPT	3/8" NPT	7	2.1	1/4	6.4
	HS338	3/8" NPT	3/8" NPT	8	2.4	1/4	6.4
	HS3310	3/8" NPT	3/8" NPT	10	3.0	1/4	6.4
	HS3312	3/8" NPT	3/8" NPT	12	3.6	1/4	6.4
	HS3315	3/8" NPT	3/8" NPT	15	4.5	1/4	6.4
	HS3320	3/8" NPT	3/8" NPT	20	6.0	1/4	6.4

Rubber Hoses(High Flow)	HFHS332	3/8" NPT	3/8" NPT	2	0.6	3/8	9.4
	HFHS333	3/8" NPT	3/8" NPT	3	0.9	3/8	9.4
	HFHS335	3/8" NPT	3/8" NPT	5	1.5	3/8	9.4
	HFHS336	3/8" NPT	3/8" NPT	6	1.8	3/8	9.4
	HFHS338	3/8" NPT	3/8" NPT	8	2.4	3/8	9.4
	HFHS3310	3/8" NPT	3/8" NPT	10	3.0	3/8	9.4

Polyurethane Hose	PHS332	3/8" NPT	3/8" NPT	2	0.6	1/4	6.3
	PHS333	3/8" NPT	3/8" NPT	3	1.0	1/4	6.3
	PHS335	3/8" NPT	3/8" NPT	5	1.5	1/4	6.3
	PHS336	3/8" NPT	3/8" NPT	6	1.8	1/4	6.3
	PHS337B	3/8" NPT	3/8" NPT	7	2.1	1/4	6.3
	PHS338	3/8" NPT	3/8" NPT	8	2.4	1/4	6.3
	PHS3310	3/8" NPT	3/8" NPT	10	3.0	1/4	6.3
	PHS3312	3/8" NPT	3/8" NPT	12	3.6	1/4	6.3
	PHS3315	3/8" NPT	3/8" NPT	15	4.5	1/4	6.3
	PHS3320	3/8" NPT	3/8" NPT	20	6.0	1/4	6.3
	PHS3330	3/8" NPT	3/8" NPT	30	9.0	1/4	6.3

Polyurethane Hose (High Flow)	HPHS332	3/8" NPT	3/8" NPT	2	0.6	3/8	9.7
	HPHS333	3/8" NPT	3/8" NPT	3	1.0	3/8	9.7
	HPHS335	3/8" NPT	3/8" NPT	5	1.5	3/8	9.7
	HPHS336	3/8" NPT	3/8" NPT	6	1.8	3/8	9.7
	HPHS338	3/8" NPT	3/8" NPT	8	2.4	3/8	9.7
	HPHS3310	3/8" NPT	3/8" NPT	10	3.0	3/8	9.7
	HPHS3312	3/8" NPT	3/8" NPT	12	3.6	3/8	9.7
	HPHS3315	3/8" NPT	3/8" NPT	15	4.5	3/8	9.7
	HPHS3320	3/8" NPT	3/8" NPT	20	6.0	3/8	9.7
	HPHS3330	3/8" NPT	3/8" NPT	30	9.0	3/8	9.7

ACCESSORIES

POWERRAM
HYDRAULIC TOOLS

Max. Working Pressure - 700 bar / 10,000 psi



COUPLERS

Description	Model No (Set)	Dimensions (mm)	Model No.
	CP210	NEEDLE (Plastic caps for both ends) RAM HALF: 1/4 NPT HOSE HALF: 1/4 NPT	CP211 CP212
	CP230	NEEDLE (Metal cover for Ram half) RAM HALF: 1/4 NPT HOSE HALF: 1/4 NPT	CP231 CP232
CP381 CP382	CP380	NEEDLE (Plastic caps for both ends) RAM HALF: 3/8 NPT HOSE HALF: 3/8 NPT	CP381 CP382
	CP330B	BALL (Plastic caps for both ends) RAM HALF: 3/8 NPT HOSE HALF: 3/8 NPT	CP331B CP332B
	CP350	NEEDLE (Metal cover for Ram half) RAM HALF: 3/8 NPT HOSE HALF: 3/8 NPT	CP351 CP352
	CP430	NO-SPILL RAM HALF: 3/8 NPT HOSE HALF: 3/8 NPT	CP431 CP432

HYDRAULIC OIL

- Used for 700 bar cylinders / hand pumps (transparent) and electric pumps (blue color).
- Contains anti-rust, anti-wear, anti-oxidant and anti-foaming additives.
- High quality hydraulic oil with low pour point.

Model No.	Dimensions (mm)
HO1L	ISO 15 Grade, 1L Package
HO2L	ISO 15 Grade, 2L Package
HO4L	ISO 15 Grade, 4L Package
HO5L	ISO 15 Grade, 5L Package

GAUGES

Description	Model No.	Dimensions (mm)
	M0039	Liquid filled dampens needle vibration. Calibrated to read in bar, psi. Dial - 2-1/2" ; Thread Size: 1/4NPT Accuracy, Meet DIN Standard $\pm 1.6\%$ of full scale.
	M0136	All Features same as M0039 Except with Dial - 100 mm.

Extra High Pressure Couplers: 2,000 bar & 3,000 bar

POWERM
HYDRAULIC TOOLS



		Part No.	Connection	Length	Diameter	Hexagon	Con. stroke	Weight (g)	Rec. torque (Nm)	Rec. Sealing method
COUPLINGS	Female thread	10 125 1202	G 1/4"	64.3	30.0	24	20.2	210	40-50	CMS
NIPPLES	Female thread	10 125 6202	G 1/4"	38.0	25.4	22	-	60	40-50	CMS
	Male thread without valve	10 125 5252	G 1/4"	42.5	25.4	22	-	65	100-110	Washer (2*)

		Part No.	Connection	Length	Diameter	Key handle	Con. stroke	Weight (g)	Rec. torque (Nm)	Rec. Sealing method
COUPLINGS	female thread with 60° sealing cone (interchangeable with both nipple designs)	10 135 1505	M16x1.5	64.0	30.0	22	20.6	210	40-50	
					Max. working pressure: 300 MPa Min. bursting pressure: 600 MPa Temperature range: -20° C - +80° C (0°F - +175°F) Max. no. of pressure cycles connected with nipple 10 135 6505: 1000 nipple 10 135 6506: 5000		Seal material: Nitrile rubber Flow diameter: 2.5 mm (3/32")			
NIPPLES	Female thread with 60° sealing cone Standard design	10 135 6505	M16x1.5	55.3	25.0	22	-	125	40-50	
					Max. working pressure: 300 MPa Min. bursting pressure: 600 MPa Temperature range: -20° C - +80° C (0°F - +175°F) Max. no. of pressure cycles connected (to max. working pressure): 1000		Seal material: Nitrile rubber Flow diameter: 2.5 mm (3/32")			
	Female thread with 60° sealing cone Non-swivel design	10 135 6506	M16x1.5	55.3	25.0	22	-	125	100-110	
					Max. working pressure: 300 MPa Min. bursting pressure: 600 MPa Temperature range: -20° C - +80° C (0°F - +175°F) Max. no. of pressure cycles connected (to max. working pressure): 5000		Seal material: Nitrile rubber Flow diameter: 2.5 mm (3/32")			
					Non-swivel model. Six optional positions are possible when connecting.					

Nominal sizes ND 100 / 160
Connection position
bottom, radial




FEATURES

- Measuring system made of high corrosion - resistant material.
- All stainless steel version compatible with most chemicals.
- Accuracy class Kl.1.6
- Equipped with safety glass, blow out plug and restrictor.
- Vibration-free display and long service life by filling glycerine .

DESCRIPTION

Ideal for high demands on pressure test measurement in bending machine and apparatus construction.

The measuring system is of accuracy class 1.6 has overrange protection up to 1.1 times the max. rating and can be loaded up to the full scale value.

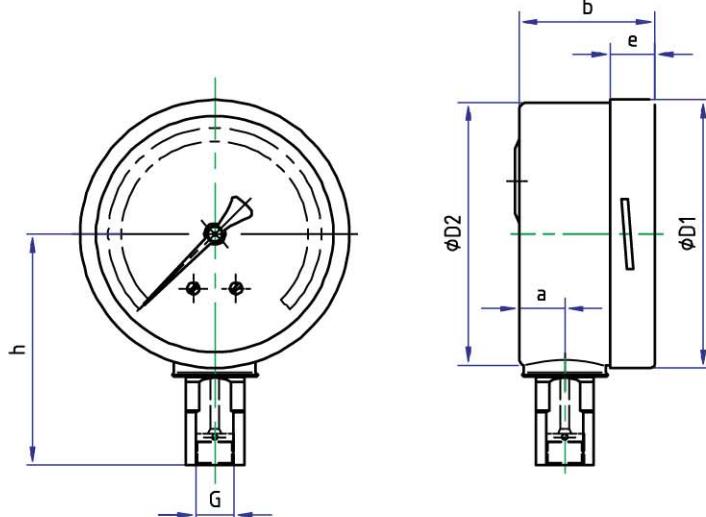

Model No.:P1710/P1714

MEASURING RANGES

0~1400 bar to 0~4000 bar

Applications

Machine and apparatus construction, special machinery and pumps

option: contact cover plastic, max. 2 contacts

data sheet DE 1227 exists in addition.

Model No.	ND	a	b	D1	D2	e	G	h±1	SW
P1710	100	17,7	54	101	100	17,5	M16x1,5	87	22
P1714	160	15,4	49,5	161	160	17,5	M16x1,5	125	22

Extra High Pressure Hoses

POWERM
HYDRAULIC TOOLS

Hose Type 5/4



Applications:

Waterblasting: Heat Exchanger Tube Cleaning
 Hydraulics: Bolt Tensioning and Torque Tools, Hydraulic Jacks, Controls for Service Equipment, Instrumentation Packages for Gauges, Pressure Testing for Valves, Tooling and Control Panels, Hydraulic Tools
 Oil and Gas: Chemical Injection, Gaseous Media Handling, Grease Injection, Hydraulic Control, Nitrogen Service

Inner Core: Polyoxymethylene(POM)
 Pressure Support: 4 layers of high-tensile steel wire
 Outer Cover: Polyamide(PA)
 Colour: grey, other colours upon request
 Temperature: -22°F to 140°F [-30°C to +60°C]

ΦID	ΦOD	Working Pressure*)	Burst Pressure*)	Min. Bend Radius	Weight	Nipple ΦID	Sleeve	Sleeve ΦOD
0,20 inch	0,44 inch	26.100 psi	65.250 psi	5,91 inch	0,175 lbs/ft	0,10 inch	10540101 carbon steel	0,59 inch
5,0 mm	11,2 mm	1.800bar	4.500bar	150 mm	0,260 kg/m	2,5 mm	10540105 AISI 316 Ti	15,0 mm

Description	Size	Material	Part Number	
HP fitting	1/4"x28 UNF LH	carbon steel	40540211B	
HP fitting	1/4"x28 UNF LH	AISI 316 Ti	40540215B	
HP fitting BLAST PRO ²⁾	1/4"x28 UNF LH	stainless steel carbon steel	40540234Y sleeve/10540232	
HP fitting	3/8"x24 UNF LH	AISI 316 Ti	40540205B	
HP fitting BLAST PRO ²⁾	3/8"x24 UNF LH	stainless steel carbon steel	40540214Y sleeve/10540232	
HP fitting	9/16"x18 UNF LH	AISI 316 Ti	40540225B	

Hose Type 5/6H



Applications:


Hydraulics: Bolt Tensioning and Torque Tools, Hydraulic Jacks, Controls for Service Equipment, Pressure Testing for Valves, Tooling and Control Panels

Waterblasting: Ultra High Pressure Waterjet Table Cutting, Ultra High Pressure Tube Cleaning, Surface Preparation, Paint Removal, Automated Cleaning Booths, Rotating Cleaning Device for Waterblast, Hydro Demolition of Concrete, Robotic Surface Cleaning of ships, Tank and Vessel Cleaning.

Inner Core: Polyoxymethylene(POM)
 Pressure Support: 6 layers of high-tensile steel wire
 Outer Cover: Polyamide(PA)
 Colour: red, other colours upon request
 Temperature: -22°F to 140°F [-30°C to +60°C]

ΦID	ΦOD	Working Pressure*)	Burst Pressure*)	Min. Bend Radius	Weight	Nipple ΦID	Sleeve	Sleeve ΦOD
0,18 inch	0,57 inch	40.600 psi	101500 psi	8,66 inch	0,378 lbs/ft	0,08 inch	10560122 carbon steel	0,78 inch
4,6 mm	14,4 mm	2.800 bar	7.000 bar	220 mm	0,563 kg/m	2,0 mm		19,7 mm

Description	Size	Material	Part Number	
HP fitting	1/4"x28 UNF LH	stainless steel	40560294D	
HP fitting	3/8"x24 UNF LH	stainless steel	40560284D	
HP fitting	9/16"x18 UNF LH	stainless steel	40560264D	
HP fitting	M14x1.5LH	stainless steel	40540274D	



Extra High Pressure Hoses

POWERRAM
HYDRAULIC TOOLS

Hose Type 6/2

Duralife Flex™

Applications:

Waterblasting: Heat Exchanger Tube Cleaning
Hydraulics: Instrumentation Packages for Gauges, Pressure Testing for Valves, Tooling and Control Panels



Inner Core:	Polyoxymethylene(POM)
Pressure Support:	2 layers of high-tensile steel wire
Outer Cover:	Polyamide(PA)
Colour:	green, other colours upon request
Temperature:	-22°F to 140°F[-30°C to +60°C]

ΦID	ΦOD	Working Pressure*)	Burst Pressure*)	Min. Bend Radius	Weight	Nipple ΦID	Sleeve	Sleeve ΦOD
0,25 inch	0,45 inch	14.500 psi	36.250 psi	4,33 inch	0,118 lbs/ft	0,16 inch	10620101 carbon steel	0,55inch
6,3 mm	11,5 mm	1.000 bar	2.500 bar	110 mm	0,175 kg/m	4,0 mm		13,9 mm

Description	Size	Material	Part Number	
HP fitting	9/16"x18 UNF LH	AISI 316 Ti	40620205A	
male fitting one piece waterblast	1/4"x18 NPTF	carbon steel	30620469WX/30620462/1X	
male fitting one piece waterblast	G1/4"	carbon steel	30620369X/30620462/1X	

Extra High Pressure Pumps

Page 19



Hand / Foot Pumps

Page 18-28



Extra High Pressure Accessory

Page 78-81



Power Pumps

Page 29-40



Aluminum Cylinders

Page 03-06



Cylinders

Page 07-17



SAFETY TIPS

POWERRAM
HYDRAULIC TOOLS

1. Choose the right ram.



You must know the weight of what you intend to lift and choose a ram with at least 20% more capacity. Be aware of possible load shift requiring more capacity at the particular lifting point.

2. Check each components




Check each component before you set up your hydraulic system. Do not use damaged or worn components. Turn them in for repair or replacement.

3. Safety instructions.




Read all warning labels and instructions. Operating instructions must be understood before using equipment. Never remove labels from equipment. Replace missing, worn, or damaged labels. Always wear safety goggles and protective clothing when using hydraulic equipment.

4. Each jack or ram must be fully supported at the base.




Every jack or ram, whether used individually or in a system, should be completely supported on a solid, firm, non-sliding foundation capable of supporting the load.

5. Fill oil reservoirs with cylinder retracted.




Only fill pump to recommended level, and fill only when the connected cylinder is fully retracted.

6. Know how your hydraulics work.




Do not use extensions or cheater bars on hydraulic jacks or hand pumps to raise a load.

7. Center the load on the lifting point.



The load must be centered on the ram, or equally distributed on multiple rams. Off center loading can result in the ram slipping out and loss of the load.

8. When using multiple rams, distribute the load evenly.



For multiple rams lift, you must be able to determine the location and number of lifting points that will allow the load to be evenly distributed to all the rams. This is called load balance. Size, center of gravity, and load geometry must be considered in order to correctly determine load balance.


SAFETY TIPS

9. Block or crib your load as it raises.





Place blocking or cribbing under the loads as you raise it. Each time you raise it higher, insert more blocking. Position yourself in a manner that will keep you clear of the load, and will not allow your hands or other body parts between the load and the cribbing.

10. Do not use rams as permanent supports.



Hydraulic rams are not meant to be used as permanent supports, but are designed to lift and lower. If you need to hold the load for any length of time, cribbing or Powerram locknut cylinders should be used.

11. Hydraulic connections.



When making connections with quick couplers, make sure the couplings are fully engaged. Threaded connections such as fittings, gauges, etc. must be securely tightened and leak free. Never use excessive tightening force that may distort the fittings or strip the thread profile.

12. Avoid extreme heat or weld splatter.



Weld splatter will damage plunger rods and hoses. Hydraulic fluid can ignite if vaporized or exposed to high temperatures.

13. Disconnecting the hydraulics.



Never attempt to disconnect hydraulic hoses, fittings or couplers under pressure. Unload the ram, open the release screw on the hand pump and shift or open all hydraulic controls several times. If system includes a gauge, double check the gauge to insure pressure has been completely released.

14. Do not carry or drag pumps and rams by their hoses.



Dragging or carrying rams or pumps by a connected hose can damage the couplers and hoses. Using damaged couplers and hoses can be dangerous.

15. Keep hydraulic hoses free of obstructions.



Do not drop sharp or heavy objects on hose. Keep hose out of heavy traffic areas. This will cause internal damage to hose wire strands. Applying pressure to a damaged hose may cause it to rupture. Avoid sharp bends and kinks when routing hydraulic hoses.